What do five target labels learn?

Separate response level, correspondence and measurement location

1 Match the information

Mean only
Local response relation
Historical response reuse

Matched supports
+ support-label permutation

2 Fix budget and predictor

Same 5 responses
Same local RBF predictor
Different acquisition geometry

Query inputs are known;
query responses are held out.

3 Exclude query catalyst identities

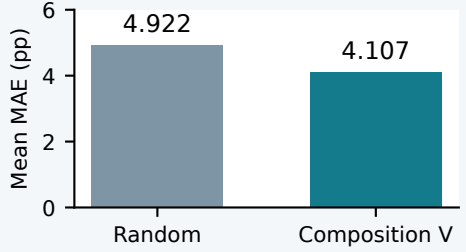

16.6% lower mean error

19/20 partitions improve; one publication

Source-disjoint historical controls + within-family catalyst-partition sensitivity

Labels help through identifiable information and task-dependent geometry.