

MapWars: Location-Aware Multi-Player Mobile Game

Final Report for CS39440 Major Project

Author: Luke Ward (luw9@aber.ac.uk)

Supervisor: Reyer Zwiggelaar (rzz@aber.ac.uk)

25th March 2013

Version: 1.0 (Draft)

This report was submitted as partial fulfilment of a BSc degree in
Computer Science (G400)

Department of Computer Science
Aberystwyth University
Aberystwyth
Ceredigion
SY23 3DB
Wales, UK

Declaration of originality

In signing below, I confirm that:

- This submission is my own work, except where clearly indicated.
- I understand that there are severe penalties for plagiarism and other unfair practice, which can lead to loss of marks or even the withholding of a degree.
- I have read the sections on unfair practice in the Students' Examinations Handbook and the relevant sections of the current Student Handbook of the Department of Computer Science.
- I understand and agree to abide by the University's regulations governing these issues.

Signature

Date

Consent to share this work

In signing below, I hereby agree to this dissertation being made available to other students and academic staff of the Aberystwyth Computer Science Department.

Signature

Date

Abstract

MapWars is the culmination of an investigation into the feasibility of creating a location-aware, multi-player real-time strategy (RTS) game for a mobile platform. Consideration about which platform to support is presented with the final decision being to focus on Google's Android operating system.

The game combines strategic game play against multiple players in a persistent environment, where game play is based on map of Earth and users are restricted in game to their real world location. Giving each user the capability to create their own army and battle against other players within their local area.

At the same time consideration was made to protect each users privacy and create a fair gaming experience. Thus different techniques on how to prevent crafted requests designed to circumnavigate limits placed in the Android client.

CONTENTS

1	Background & Ojectives	1
1.1	Background	1
1.2	Market	1
1.2.1	Choosing a platform	2
1.2.2	Android RTS Games	3
1.3	Objectives	5
1.3.1	Primary Objectives	5
1.3.2	Expanded Objectives	6
1.3.3	Limitations & Evaluation	6
2	Development Process	8
2.1	Introduction	8
2.2	Modifications	8
2.3	Development Environment	9
2.3.1	Language	9
2.3.2	Deveopment Environment	9
2.3.3	Hardware	9
2.3.4	Other tools	9
3	Design	11
3.1	Overall Architecture	11
3.2	Data Structures	11
3.3	Class Diagram	11
3.4	Use Case Diagram	11
3.5	Mapping	11
3.5.1	Google	11
3.5.2	OpenStreet Map	11
3.5.3	MapBox	12
3.6	User Interface	13
4	Implementation	14
4.1	Client Implementation	14
4.1.1	Mapping & Location	14
4.1.2	Communication	14
4.1.3	Units	14
4.2	Server Implementation	14
4.2.1	Echo	14
4.2.2	Units	14
4.2.3	AI	14
5	Testing	15
5.1	Overall Approach to Testing	15
5.2	Automated Testing	15
5.2.1	Unit Tests	15
5.2.2	User Interface Testing	15
5.2.3	Stress Testing	15

5.2.4 Other types of testing	15
5.3 Integration Testing	15
5.4 User Testing	15
6 Evaluation	16
6.1 Primary & Secondary Objectives	16
6.2 Critical Evaluation	16
6.2.1 Known Bugs	16
6.2.2 Improvements	16
6.3 Summary	16
Appendices	17
A Third-Party Code and Libraries	18
Annotated Bibliography	19

LIST OF FIGURES

1.1	Developer Economics report [4] shows iOS as the leading platform among developers	2
1.2	Tropical Stormfront from Noble Master Games	4
3.1	Insert design of game map	13
3.2	Insert design of game map menu	13

LIST OF TABLES

Chapter 1

Background & Objectives

1.1 Background

Real-time strategy (RTS) games have a huge market on desktop environments, but have yet to make the break through into the mobile gaming market. This is mostly attributed to the complex control mechanisms that need to be executed precisely. A mobile devices form factor restricts the number of controls that can be presented to the user at any given time as well as the precision in which these commands can be issued.

RTS games are generally designed around large, expansive maps that cover a large range of environments and landscapes. The game map shapes how the game will be played, how involved the player feels and ultimately the engagement of players. These maps can take years to develop and result in one of the largest costs within the development process. So when coming up with an environment why not take advantage of a ready made one? That of planet Earth.

Building a game where the game play takes place on a map of Earth has a number of benefits. First is the scale of a map covering 510 million square kilometres of varying terrain and features. This scale also contains a huge level of detail that could not be achieved by a team of designers. Along side this there is the feeling of familiarity, unlike when starting a new game and having to teach the player about the environment, the user will already have a well formed model in their own head. Along with highly detailed knowledge about certain areas especially those within close proximity of their current location.

Mobile devices have a whole host of unique features and sensors that set it apart from other gaming platforms. One feature that has been widely adopted in a huge range of different applications is location. A users location can be easily determined with a number of different components present on most modern smart phones, these are a GPS chip and the mobile GSM network. Although location has been used extensively in applications it has yet to be utilized effectively as a key metric within a game. This extra information about the user would enable a game set around the physical world to be able to be integrated with the user. Instead of placing new users randomly on a unfamiliar map they can be placed in their real location. Thus giving them a chance to use their own knowledge of their surroundings to help them within the game environment.

1.2 Market

A worldwide RTS game that combines a map of the world and data gathered about the user combine to create a unique gaming experience and could add an entirely new dimension to the genre. This can also reduce the learning curve and thus shorten the time between installation and engage-

ment. With the sheer number of applications available on a mobile platform combined with the ease and minimal to no cost of installing new applications, this is important to reduce the chance of the user simply finding an alternative.

1.2.1 Choosing a platform

The current mobile platform oligopoly results in their only being two viable platforms, Apple's iOS and Google's Android OS. The Android operating system, as of February 2013, had over 51% market share in the US [3]. Closely followed by the original and most established app ecosystem of Apple iOS. Even though there are other platforms, such as Windows phone and Blackberry, none of these have the market share allow them to be a primary platform of choice. Therefore choosing between the two platforms can be an important decision for mobile developers, both platforms offer their own unique advantages and disadvantages. Android on the one hand has the lead on market share offering a larger audience, although this will not directly affect engagement or return.

This years Developer Economics report [4] looks at all aspects of the mobile app market and is an invaluable insight into both the market and consumer trends. As well as evaluating the current market it also gets feedback from developers as to their experiences with different platforms as well as their success.

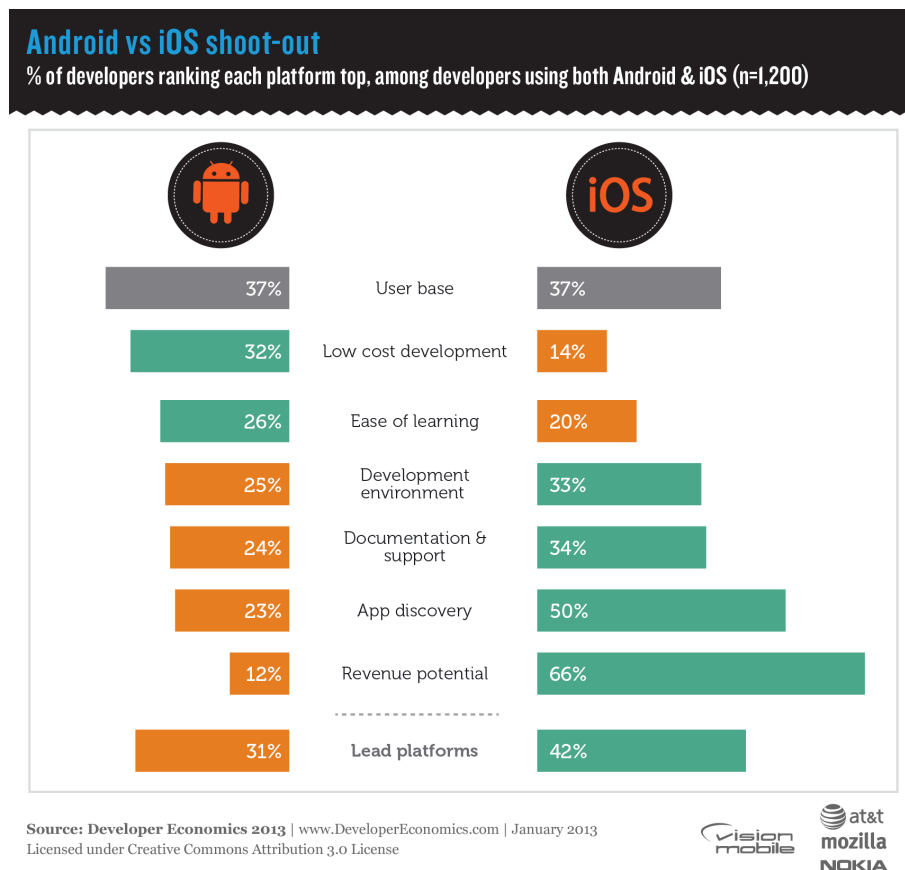


Figure 1.1: Developer Economics report [4] shows iOS as the leading platform among developers

As shown in Figure 1.1 iOS does indeed have a number of advantages over Android. Most

importantly is the drastically increased chance of discovery as well as the expected return from applications on the iOS platform. For this project however less emphasis was placed on the success of the finished application and more on the process of creating it. Therefore the metrics of development cost and learning curve were considered to be more important. Aside from the Developer Economics findings there were a number of other more fundamental reasons as to why Android was the preferable platform. There was a certain amount of background knowledge and previous experience both with using and developing for the platform. The development environment had already been investigated and a small application developed prompting confidence in the ability to create and deploy something. Also a reasonable selection of Android devices were available for developing and testing purposes, which was favourable to using emulators and a single test device which would have been available for iOS.

The final consideration, which will be explored further in the following subsection, is that of not just overall market share but the scale of competition. IOS tends to attract the gaming market and as a result has a large selection of highly polished, top quality gaming titles. Whereas the Android market has a considerably smaller selection of games and these tend to be more basic and less graphically pleasing. Although this is changing as game developers migrate to Android it does give an advantage to new developers that might not be able to compete with the quality of iOS.

1.2.2 Android RTS Games

There is currently only a small handful of RTS games available for Android and of these most are unsatisfactory attempts. That being said there are a few well executed examples with the best examples coming from Noble Master Games (<http://www.noblemaster.com/>) who focus entirely on making these types of games for both desktop and mobile. The Stormfront series (<http://www.operationstormfront.com>) consisting of Tropical Stormfront and Desert Stormfront are the closest Android offerings to a full RTS gaming experience. Originally released for Android both were later ported to PC, MAC and Linux then subsequently iOS, this was made possible due to the game being built with OpenGL. These games offered the best chance to evaluate what had been done before and see what is expected and what would work well for MapWars. By examining different aspects from game play to control options it is a good opportunity to pick up ideas for the UI and user interaction.

Tropical Stormfront was their first release for Android in December 2011 and for iOS in November 2012. It took the RTS experience and simplified it to aim it towards the casual gamers that make up a large percentage of the mobile market. Its simple sprite style isometric graphics, shown in Figure 1.2, are pleasing on the eye and make units and structures easy to identify. The uses of an isometric view also removed the complexity presented by 3D graphics, that could it make it difficult to control, while retaining a well designed style.

The game revolves around a series of short predefined missions. Each mission only takes a matter of minutes to complete and don't really require a huge amount of strategy this caters nicely for the casual gamer. There is also an option for multi-player games with a selection of modes ranging from skirmish to capture the flag, with one user hosting the game. The host is able to choose the game type, map and a number of other options, other users can then join the game.

Unit control for example is cutback, users can control where units should move to as well as which enemies to attack but no other complex commands could be issued. A very useful feature was the ability to group units together and assign said groups to hot-keys along the bottom of the screen. Without these it was difficult to command a number of units in a controlled manor. As well as these assigned groups there was also the option to select units individually, by tapping that



Figure 1.2: Tropical Stormfront from Noble Master Games

unit, or multiple units. Multiple unit selection was handled by tapping the green icon to the left of the hot-key buttons. This then enabled the user to drag over an area units selecting all within that area. It was important for MapWars to retain this level of control while retaining its simplicity. It could even be simplified further by removing manual targeting of enemy units, leaving this up to the games AI system.

Another aspect that is missing is the ability to create and position buildings. Each map comes with a predefined set of bases that can not be altered or moved but enemies can capture other players bases. These bases give players the ability to create new units and are also the mechanism for getting money. New units are built in a fairly standard process of selecting a base which in turn gives a range of units to build. Units cost a certain amount of money or resources to be built and the build process takes an amount of time to complete. After the unit has finished being built it exits the base and can be interacted with as usual. The lack of build queue, in which players can make a list of which units they want built and they will be processed in turn, was found to be restrictive. Inclusion of a build queue seemed plausible while still maintaining the ease of use.

As mentioned previously in game currency is generated based upon the number of bases a player controls. Each base earns \$50 per minute, so the more bases captured the more money earned which in turn allows for building more units. Resource discovery, gathering and management are key aspects on PC based RTS games but could present problems when being implemented on a mobile device. By removing these aspects the developers were able to speed up game play and in turn try to make the game more exciting. Unfortunately the direct correlation between number of units and victory made game play feel predictable as the player who captured the most bases inevitably won.

Tropical Stormfront takes a good approach that, as with a number of the other compromises, directs the game towards casual gamers by removing some of the complex strategy decisions. They focused on fast based game play by setting the player up with a particular scenario with an established base and units with close proximity to the target. MapWars, although sharing many similarities, will ultimately be seeking a different target audience and game play style. The main aspects to be taken forward into the design of MapWars are:

- Simplify the process of issuing commands to units

- Ability to select multiple units at once
- Clutter free UI
- Cater for the casual gamer while accommodating those who want something more engaging
- Build queues

1.3 Objectives

MapWars is going to attempt to focus on tactical game play with a mobile experience tailored to the users location. All game play will take place on a portion of a world map depending on the players location. While taking as many of the tactical aspects from existing PC RTS games with an elevated focus on resource gathering and long term tactical game play. Unlike some games that allow for fast paced "rushing" (a tactic in which a team will attack an opponent as quickly as possible as to surprise and overwhelm them) MapWars will encourage players to find and gather resources while building a substantial base and selection of units. This is in part due the sparsity of opponents in such a large environment. To try and compensate for the widespread nature of players, as well as the desire to recreate a real world experience, all players will play in a single persistent game. Being persistent all units will be visible even if their respective players are not online increases the emphasis on building a well formed and fortified base.

Problems may be presented with early adopts and those in remote areas who will ultimately not come across other players for considerable portions of their experience. This will undoubtedly lead to players getting bored and leaving the game. To try and combat this possibility game play should try and be enhanced for non-offensive play. The focus on resource gathering, exploration and base development hopefully will be the main combat to this problem, giving players the ability to enjoy the game even without an opponent. Secondly the persistent and location-aware portions will help the game change and evolve as players move around. For example if a player from an unpopulated area spends their time enhancing their units could then travel to a more active area, such as a city, to engage with opponents.

1.3.1 Primary Objectives

The objectives listed are considered to be the minimum required to create a playable game:

- Ability to authenticate users
- Display all units on a map centred on the players current location, limited to a given range
- Location will be determined by all available sensors and the most accurate to be used
- Appropriate portions of the application will stop functioning when minimized, to preserve battery life and minimize data usage. The application should then return to a playable state when returned to
- Resource gathering
- Enable players to create units, within a given range of their current location
- Enable players to move units, within a given range of their current location
- Units will engage with enemy that come into range automatically

1.3.2 Expanded Objectives

If the primary objectives are completed before the hand-in date the following objectives will be considered. Each of these extra objectives are not essential to the project but would add extra depth to the game play and ultimately improve the overall experience.

- Altering the resources generated by each mine based on real world resources in that location
- Introduction of environment variables such as power requirements. Each structure will add to the energy requirements, if these aren't met the structures will not function.
- Ability to upgrade units and structures
- Extra unit and structure types
- Path finding that follows physical routes e.g. roads utilising a directions API
- Offline notifications

1.3.3 Limitations & Evaluation

Working with a mobile platform comes with a number of technical challenges and limitations. Most notably is battery life, modern smartphones are capable of a multitude of tasks that increases the demand on the phones battery. This combined with the lightweight, small factor demanded by consumers the battery life is severely limited. While developing MapWars it was important to keep this in mind and reduce the battery usage where possible. Certain areas that large power savings can be made, such as reducing the use of GPS sensors, can have a detrimental affect on accuracy or responsiveness. For this application the accuracy of the users location as they move around was not of a particular importance as it was used simply to locate them in the game area and not displayed directly. Therefore, with some small experimentation, the frequency in which the location was queried was tweaked to get a satisfactory balance between power usage and accuracy. Redrawing the screen is another drain on the battery so these should be kept to a minimum. The drawback with reducing the number of redraws is the possibility that the on screen movements of units and animations will become jolty and detract from the experience. Again experimenting with the delays within animation threads and reducing unnecessary redraws helps to keep the action smooth.

With over a thousand unique devices each offering a unique subset of sensors, screen sizes and features it is impossible to predict what features will be available on any device that will be running the application. For this reason it was important to take advantage of all possibilities while being aware of the limitations that may be presented. If a device does not support GPS or has it disabled, for example, it was necessary to find an alternative source of location data. Each source of data offered different levels of accuracy so again it was necessary to take this into consideration when determining which source to trust.

The success of this project will be evaluated primarily by it's ability to perform the tasks set out in the main objectives set out earlier in the document. Unit responsiveness when created and moved must be quick and consistent across devices. When a unit is moved on one screen the accuracy in which this is reflected on all other devices within proximity needs to be examined, with the smaller the difference resulting in a positive evaluation. With such a type of game this responsiveness can negate from the users experience and if it's too slow will frustrate and anger the player. Advantage can not be given to users based on their choice of device and connectivity. The applications consideration for the environment, as explained briefly above, is also a critical

point to evaluate. As well as just the battery usage of the application the amount of data sent and received also needs to be kept at a minimum.

These objectives are the only the basis and do not give a complete picture of the desired outcome. As well as these objectives the finished application must play well and be a pleasurable experience. These are difficult requirements to quantify and will rely heavily on user testing and feedback. By distributing the application amongst users unfamiliar with any previous incarnations will be the best measure of it's playability. Their ability to play the game without external interaction and their overall enjoyment are the most valuable measurements available.

Previous metrics are focused primarily on the clients representation of data received from the server, the server it self needs to be evaluated. The server is required to be able to handle multiple concurrent connections each issuing commands that may or may not affect the other connected users. It must also be able to control unit movements and automated targeting and attack mechanisms. All while validating users actions and preventing spoofed requests, crafted to give the user an advantage over other users using the Android client.

Chapter 2

Development Process

Due to a strict deadline and extensive possibilities the project offered it is important to choose a development life cycle that could both quick and flexible. It needed to be able to allow for rapid development in a controlled manor that would reduce the need for rewriting and refactoring of code. Therefore the methodology will revolve around an iterative life cycle. As the project is easily broken down into a small number of well formed sections these iterations are able to be well formed before development beings.

2.1 Introduction

The development life cycle chosen is that of Rapid Application Development (RAD). This process reduces the need to have a detailed specification or design at the beginning of development. Instead specification, design and implementation are all simultaneous. This life cycle follows more closely to the Spiral Model than that of a more traditional waterfall type life cycle. The Spiral Model, as defined by Barry Boehm [1], depicts an evolutionary style of development which still keeps control over the project. Unlike the waterfall model which requires a stringent and detailed design that needs to be followed throughout implementation. Only the highest-priority features are considered for each iteration. The chosen feature is defined, designed and implemented during the cycle. Each cycle results in a prototype of a portion of the final system that can be tested. From this prototype ideas can be tweaked and changed then defined and implemented. Then the next feature can be defined and so on until the desired system is completed.

The RAD life cycle is a further streamlining of the spiral model and only has four distinct stages. Firstly there is the requirements gathering stage where all parties agree on the scope and requirements for the overall project. This is followed by user design where users interact with the developers and create a set of prototypes that are then evaluated by the users. This step is continuous phase that sees the prototypes change and adapt to the users requirements. This phase works in tandem with the construction phase which sees the prototypes be integrated into the final application and tested. With the user still actively involved they can suggest changes and improvements as the application takes shape. After the application is completed the final stage sees its testing, integration and user training.

2.2 Modifications

The spiral and RAD models are defined as an evolutionary method therefore each iteration prototype should be delivered to the stakeholders. These stakeholders can then give their feedback

which should be utilized in the next cycle. Seeing as this project does not have any stakeholders this crucial step can not be completed and therefore the model needed to be adapted from a evolutionary to an incremental one. To achieve this the stages were mapped out before implementation began resulting in a slightly increased amount of design. These stages were purposefully left as broad as possible to accommodate necessary changes that would present themselves as development began.

As well as removing the of reworking code by cutting out the feedback loop for each prototype, the user design and construction phases are combined. This single step would see prototypes being worked directly into the current code base. In this way extra development time would not need to be used to integrate the prototype back into the master branch. This combination by itself would slowly reduce the code quality seen across the application as ideas are tested, for this reason spike work is encouraged to be carried out before each iteration. These short spike work sessions should show up any problems and highlight more efficient ways that part of code could be implemented. This will then carry over into the main code when the feature is implemented. It is important to keep this spike work short and focused and full solutions are not the ideal outcome from it.

These modifications were made as a way to streamline development, reducing time spent in design and coding while not reducing code quality or flexibility.

2.3 Development Environment

2.3.1 Language

Developing applications for the Android OS restricts the language choice to just Java combined with an Android framework. This results in code written with Java syntax but are not entirely synonymous with Java. Code is converted from JVM (Java Virtual Machine) compatible code to code that can be run by Dalvik, the virtual machine used by Android. This conversion optimizes the code to be run on devices with limited memory and processing power. As of Android 2.2 the new version of Dalvik now features a just in time (JIT) compiler [2]

Java, Python

2.3.2 Deveopment Environment

Eclipse, sublime, GIT, GitHub

2.3.3 Hardware

Although the platform has been selected it is also important to examine the target devices. Android has began reaching much wider than just the phone market as it finds its way on to tablets, set-top boxes and netbooks.

Devices? 96% Android phones, 64%Table, remaining 20% netbooks and TVs.

Phones, tablets, broken digitizer

2.3.4 Other tools

DIA?

Development on the Android platform restricts development to Java using the Android SDK. It was decided to use the Eclipse IDE as the main editor partly due to it's popularity and abundance of information and also it's improved integration with the SDK. Google provide an Eclipse

plugin called Android Development Tools (ADT) which provide a set of tools to streamline the development process.

The server portion of the project was written in Python this was mainly to speed up development and minimize unforeseen problems. Python is a general purpose high-level programming language that has a small learning curve and generally produces concise code.

Chapter 3

Design

Strategy?

3.1 Overall Architecture

3.2 Data Structures

3.3 Class Diagram

3.4 Use Case Diagram

3.5 Mapping

The central component of the application was going to be a map. For this reason it was vitally important that an appropriate mapping solution was used.

3.5.1 Google

Google provides a simple, easy to use interface to their own maps making it the obvious choice for any Android application. Their maps are accurate, up-to-date and very detailed.

Google Maps were used for early prototype development.

Unfortunately there are a number of restrictions in place stopping their use in a number of situations. The most relevant of which is that they can not be used in an application that is not freely available to the public. Therefore restricting it's use in a paid-for application, such as MapWars may become. As the future of the application is uncertain it seemed desirable to steer clear of as many possible restrictions as possible. For this reason it was important to find a comparable alternative.

3.5.2 OpenStreet Map

OpenStreet map is an INSERT DESCRIPTION OF OSM HERE. It's growing popularity means that INSERT STATS ABOUT AREAS COVERED. With an acceptable level of detail combined with it's open SOMETHING(ethos?) made it the next most obvious source.

OSM has an API that allows it to be easily embedded into webpages but no native android SDK. A number of 3rd party libraries are available. The most complete and popular is that provided by MapQuest.

MapQuest are a mapping company that combines proprietary data and OSM data to create their own maps. They offer an Android SDK that gives you the option of which tile source to use. There are obviously restrictions to the proprietary data but if you opt for the free tiles then the same license is used as with OSM. The Android SDK available was designed to mirror the API available for the Google Map SDK. This made swapping out the Google Maps code and replacing it with the MapQuest code was trivial and problem free.

At the point in time of implementing MapQuest the design had called for the option to switch between satellite and road maps. MapQuest's main drawback, and more widely OSM itself, was it's lack of detail. The level of zoom supported was a number of levels less than that of Google Maps. These extra zoom levels would have made unit manipulation easier on smaller devices. Satellite images were the main concern as they were not available at the level of zoom required to make game play comfortable.

MapQuest was used as the mapping solution for a large portion of development and offered a stable platform. Once more of the functionality was in place user testing presented a number of problems with the map tiles being used. Most significant of which was a difficulty in being able to locate units among the details presented with the map. The sprites and colours being used to represent units were experimented with but none were clearly visible. The problem was with the design of the tiles being used and not necessarily the zoom levels present, although this may have helped alleviate the problems.

3.5.3 MapBox

One option available was to use a tile creator and host the map tiles on a server. This would be a costly and difficult solution to the problem. Hosting tiles is not a trivial task and require large amounts of storage and bandwidth.

MapBox offer beautiful hosted tiles. They also have their own software called TileMill which allows the creation of bespoke tiles based on any data source which can then be hosted and distributed via their network. TileMill was based on a CSS style syntax allowing you to customise any visual aspect, from line widths, colours, strokes. It also had the ability to import data from any source giving the ability to build up rich tiles with as much detail as required. For MapWars only the most basic detail was required while using a simple colour pallet. The idea was to make any unit stand out against the map while still presenting all the information required to orientate the user with their surroundings.

Tiles could be loaded from MapBox using a standard URI syntax used by the most tile vendors. This allowed it to integrate easily into any mapping framework. All that was needed was an SDK that allowed custom tile sources. Such functionality was found in OSMDroid. Like with MapQuest, OSMDroid followed the same pattern as Google Maps allowing it to be easily placed into the application without only one substantial problem. OSMDroid was missing one function that was supported by both Google Maps and MapQuest. These function was key in selecting units so had to be reimplemented ... which was not difficult but took time. Assumption was made it would be as effortless as the previous transition. After integration was complete plugging in the URI to my generated tiles was simple and worked straight of the bat.

MapBox did not offer satellite imagery but the beauty and simplicity of the maps being used made up for this. It was also decided that the complexity of such maps would just present the same images as found with the default OSM tiles. Satellite images could always be added to OSMDroid

by simply finding a tile source and using that and would have no affect on the functionality of the application.

3.6 User Interface

When developing any application for a small form factor it is important to consider how the user interface can be minimized, and to not clutter the display making precise controls difficult. This is especially important when trying to fit all the functionality of a RTS game within the small form factor of a mobile device. To get around this problem only the essential controls will be included with only a portion of these being accessible from the main game screen.




Figure 3.1: Insert design of game map



Figure 3.2: Insert design of game map menu

Figure 3.2

Chapter 4

Implementation

The project was split into two entirely separate parts, the server and the client.

4.1 Client Implementation

4.1.1 Mapping & Location

The initial investigation into both mapping and determining the users location.

4.1.2 Communication

4.1.3 Units

4.2 Server Implementation

4.2.1 Echo

4.2.2 Units

4.2.3 AI

Chapter 5

Testing

Detailed descriptions of every test case are definitely not what is required here. What is important is to show that you adopted a sensible strategy that was, in principle, capable of testing the system adequately even if you did not have the time to test the system fully.

Have you tested your system on 'real users'? For example, if your system is supposed to solve a problem for a business, then it would be appropriate to present your approach to involve the users in the testing process and to record the results that you obtained. Depending on the level of detail, it is likely that you would put any detailed results in an appendix.

5.1 Overall Approach to Testing

5.2 Automated Testing

5.2.1 Unit Tests

5.2.2 User Interface Testing

5.2.3 Stress Testing

5.2.4 Other types of testing

5.3 Integration Testing

5.4 User Testing

Chapter 6

Evaluation

6.1 Primary & Secondary Objectives

6.2 Critical Evaluation

6.2.1 Known Bugs

6.2.2 Improvements

6.3 Summary

Appendices

Appendix A

Third-Party Code and Libraries

If you have made use of any third party code or software libraries, i.e. any code that you have not designed and written yourself, then you must include this appendix.

As has been said in lectures, it is acceptable and likely that you will make use of third-party code and software libraries. The key requirement is that we understand what is your original work and what work is based on that of other people.

Therefore, you need to clearly state what you have used and where the original material can be found. Also, if you have made any changes to the original versions, you must explain what you have changed.

Annotated Bibliography

- [1] B. Boehm, "A spiral model of software development and enhancement," *Computer*, vol. 21, no. 5, pp. 61–72, 1988.
- [2] D. Bornstein, "Dalvik JIT," <http://android-developers.blogspot.co.uk/2010/05/dalvik-jit.html>, 2010.

This is my annotation. I should add in a description here.

- [3] comScore, "comScore Reports February 2013 U.S. Smartphone Subscriber Market Share," http://www.comscore.com/Insights/Press_Releases/2013/4/comScore_Reports_February_2013_U.S._Smartphone_Subscriber_Market_Share, 2013.

This is my annotation. I should add in a description here.

- [4] Developer Economics, "Developer tools: The foundations of the app economy," <http://www.visionmobile.com/product/developer-economics-2013-the-tools-report/>, 2013.

This is my annotation. I should add in a description here.

- [5] Handset Detection, "Where in the World are Android Devices Showing Up?" <http://www.handsetdetection.com/blog/where-in-the-world-are-android-devices-showing-up-infographic/>, 2013.

This is my annotation. I should add in a description here.

- [6] MapQuest, "Android Maps API: Developer's Guide," <http://developer.mapquest.com/web/products/featured/android-maps-api/documentation>.

This is my annotation. I should add in a description here.