Predicting Above-Sentence Discourse Structure using Distant Supervision from Topic Segmentation

Patrick Huber*, Linzi Xing*, Giuseppe Carenini

Department of Computer Science University of British Columbia Vancouver, BC, Canada, V6T 1Z4

Abstract

RST-style discourse parsing plays a vital role in many NLP tasks, revealing the underlying semantic/pragmatic structure of potentially complex and diverse documents. Despite its importance, one of the most prevailing limitations in modern day discourse parsing is the lack of large-scale datasets. To overcome the data sparsity issue, distantly supervised approaches from tasks like sentiment analysis and summarization have been recently proposed. Here, we extend this line of research by exploiting distant supervision from topic segmentation, which can arguably provide a strong and oftentimes complementary signal for high-level discourse structures. Experiments on two human-annotated discourse treebanks confirm that our proposal generates accurate tree structures on sentence and paragraph level, consistently outperforming previous distantly supervised models on the sentence-todocument task and occasionally reaching even higher scores on the sentence-to-paragraph level.

1 Introduction

The Rhetorical Structure Theory (RST) (Mann and Thompson 1988) is arguably one of the most popular frameworks to represent the discourse structure of complete documents. As such, RST has received considerable attention over the past decades, being leveraged to benefit important NLP downstream tasks, such as text classification (Ji and Smith 2017), sentiment analysis (Bhatia, Ji, and Eisenstein 2015; Hogenboom et al. 2015; Nejat, Carenini, and Ng 2017; Huber and Carenini 2020a), summarization (Marcu 1999; Gerani et al. 2014; Xu et al. 2020; Xiao, Huber, and Carenini 2020) and argumentation analysis (Chakrabarty et al. 2019).

Compared to other competing discourse theories (e.g., PDTB (Prasad et al. 2008)), RST postulates complete discourse trees based on clause-like Elementary Discourse Units (abbreviated: EDUs), which are sentence fragments on an intermediate granularity level between words and sentences. With EDUs acting as leaf nodes in RST-style discourse trees, constituents are formed by aggregating EDUs into sub-trees containing: (1) a projective tree structure, (2) a nuclearity assignment for each internal node and (3) rhetorical relations between siblings. In this work, we focus on




Figure 1: Textual levels in a well-structured document and their influence on downstream tasks and available gold-label

"plain" discourse tree structures and leave the exploration of nuclearity and relation classification for future work.

Due to the definition of complete discourse trees in the RST framework, tree structures become deeper as documents grow longer (as compared to the definition in PDTB, where the aggregation stops above sentence level). Furthermore, the defining factors for the tree aggregation on higher levels diverts considerably from the ones on lower levels (e.g., aggregating multiple paragraphs vs. combining EDUs) (Jiang et al. 2021). For example, suitable features for EDU level tree aggregations (i.e., low-levels) are mostly influenced by local syntactic and semantic signals, while the tree aggregation on paragraph level (i.e., high-levels) is likely to follow more global features, such as major topic shifts planned by the author for possibly complex communicative goals (Stede 2011).

Researchers working on RST-style discourse parsing take these considerations into account by either (1) proposing hard constraints to construct discourse trees on distinct textual levels by using varying feature sets (Ji and Eisenstein 2014; Joty, Carenini, and Ng 2015) or (2) as done in recent work by Wang, Li, and Wang (2017) and Guz and Carenini (2020a), by proposing soft constraints, encoding sentence-and paragraph-breaks as input features. Furthermore, recent work on tree-level dependent RST-style discourse parsing

^{*}These authors contributed equally. Copyright © 2022, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

mostly focuses on high-level tree structures (Jiang et al. 2021).

Ideally, an RST-style discourse parser should achieve good performance on all levels shown in Figure 1. However, as argued in Kobayashi et al. (2020), the performance on high-level constituency tree structures is especially important (green arrow in Figure 1) when converting these constituency trees into dependency structures, as typically done for key downstream applications (Marcu 1999, 2000; Ji and Smith 2017; Shiv and Quirk 2019; Huber and Carenini 2020a; Xiao, Huber, and Carenini 2021).

Unfortunately, training samples for these critical high-level discourse structures are extremely limited (see red arrow in Figure 1). Not only does the largest available human-annotated treebank in English just contains 385 documents, but for each document, vastly more training samples are available for structures within sentences than for structures connecting sentences and paragraphs, since the number of nodes in a binary tree decreases exponentially from the leaves towards the root.

To tackle the data sparsity issue for discourse parsing, previous work has proposed to leverage distant supervision from tasks with naturally annotated and abundantly available training data, such as sentiment analysis (Huber and Carenini 2020b) and summarization (Xiao, Huber, and Carenini 2021). While we believe that both these auxiliary tasks capture some structural information, they are plausibly even more aligned with other aspects of discourse, such as nuclearity for summarization and discourse relations (e.g., evidence, concession) for sentiment. In contrast, this paper focuses exclusively on high-level tree structure generation, by exploiting signals from the auxiliary task of topic segmentation. Training on the naturally occurring and abundantly available topic segmentation annotations (sections/paragraphs), we believe that valuable information on major topic shifts, an effective signal indicative for high-level discourse tree structures, can be learned (Stede 2011).

More specifically, we train the top-performing neural topic segmentation model proposed in Xing et al. (2020) and use the trained model to generate discourse structures, which we evaluate on two popular discourse parsing treebanks. Based on the sequential output of the topic segmentation model, we explore the generation of discourse trees using (1) a greedy top-down algorithm and (2) an optimal bottom-up CKY dynamic programming approach (Jurafsky and Martin 2014), predicting RST-style tree structures on/above sentence level.

To better understand and properly compare the performance of our discourse tree generation algorithm with previously published models, as well as a set of baselines, we evaluate all approaches on three partially overlapping discourse tree subsets from: sentence-to-paragraph (S-P), paragraph-to-document (P-D) and sentence-to-document (S-D). In our evaluation, we find that distant supervision from topic segmentation achieves promising results on the high-level tree structure generation task, consistently outperforming previous methods with distant supervision on sentence-to-document level and in some cases reaching superior performance compared to supervised models.

2 Related Work

Rhetorial Structure Theory (RST) (Mann and Thompson 1988) is one of the main guiding theories for discourse parsing. As such, the RST framework proposes complete constituency discourse trees by first splitting a document into Elementary Discourse Units (EDUs) and subsequently aggregating them into larger (internal) sub-trees. The generated, projective tree structure (also called tree-span) is further augmented with a local importance score (called nuclearity), indicating a sub-tree as either a "Nucleus" (of primary significance) or a "Satellite" (of supplementary importance). Furthermore, rhetorical relations (e.g., evaluation, attribution and contrast) are assigned between adjacent sub-trees to represent the type of connection. In this paper, we follow the RST paradigm, generating above-sentence, "plain" constituency discourse trees (without nuclearity and relations) through distant supervision from topic segmentation.

Building on top of the RST discourse theory, RSTstyle Discourse Parsing aims to automatically infer discourse trees for new and unseen documents. With only a few small RST-style discourse treebanks available in English (e.g., RST-DT (Carlson, Okurowski, and Marcu 2002), Instruction-DT (Subba and Di Eugenio 2009) and GUM (Zeldes 2017)), most research in supervised discourse parsing has been focused on traditional machine learning approaches, such as DPLP (Ji and Eisenstein 2014), CODRA (Joty, Carenini, and Ng 2015) and the Two-Stage parser (Wang, Li, and Wang 2017). More recently, a small number of neural solutions (Yu, Zhang, and Fu 2018; Kobayashi et al. 2020; Guz and Carenini 2020a,b) have also been proposed. However, due to the limited size of available treebanks, supervised models have been shown to not perform well when transferred across domains (Huber and Carenini 2020b). As a result, a stream of unsupervised (Kobayashi et al. 2019; Nishida and Nakayama 2020; Huber and Carenini 2021) and distantly supervised (Huber and Carenini 2019, 2020b; Xiao, Huber, and Carenini 2021) discourse parsers have been proposed to address the data sparsity issue. Typically, distantly supervised approaches leverage supervision signals learned from tasks with abundant training data (e.g., sentiment analysis and extractive summarization) to infer discourse structures. Unsupervised approaches, on the other hand, mostly exploit the document hierarchy and separately aggregate tree structures on different levels based on recursively computed dissimilarity scores (Kobayashi et al. 2019), syntactic knowledge (Nishida and Nakayama 2020) or using an auto-encoder objective (Huber and Carenini 2021). In this paper, we propose another distantly supervised approach, computing discourse structures from the task of topic segmentation. We thereby draw inspiration from the findings in Jiang et al. (2021), showing that a pre-trained topic segmenter can benefit supervised discourse parsers, especially on high-levels. However, instead of augmenting a supervised discourse parser with information obtained from a topic segmentation model, we explore the potential of directly inferring high-level discourse structures from the output of topic segmentation, bypassing the data sparsity issue of supervised models through the use of distant supervision from topic segmentation.




Figure 2: Overview of our approach to generate high-level discourse structures on sentence-to-document level (S-D) from distant topic segmentation supervision.

Topic Segmentation aims to uncover the latent topical structure of a document by splitting it into a sequence of thematically coherent segments. Due to the shortage of annotated training data, early topic segmentation models are mostly unsupervised. As such, they merely exploit surface feature sets, like either the lexical overlap (Hearst 1997; Eisenstein and Barzilay 2008) or topical signals contained in sentences (Riedl and Biemann 2012; Du, Buntine, and Johnson 2013) to measure sentence similarity and thus monitor topical and semantic changes throughout a document. More recently, the initial data sparsity issue has been lifted by large-scale corpora sampled from Wikipedia (Koshorek et al. 2018; Arnold et al. 2019), containing well-structured articles with section marks as ground-truth segment boundaries. As a result, neural-based supervised topic segmenters (Koshorek et al. 2018; Arnold et al. 2019; Xing et al. 2020) have been heavily explored, due to their efficiency and robust performance. Following this trend, we choose a topperforming neural topic segmenter proposed by Xing et al. (2020), directly addressing the context modeling problem commonly ignored in previous literature, as our base model for the discourse tree inference.

3 Methodology

This section describes our new approach to generate high-level discourse structures for arbitrary documents using distant supervision from topic segmentation. An overview of our methodology is presented in Figure 2. At the top, we visualize a naturally organized document, where words are aggregated into clauses (or EDUs), which are in turn concatenated into sentences. Sentences are then further combined into paragraphs¹, forming the complete document. Here, we aggregate sentences as the atomic units to obtain high-level discourse trees (bottom of Figure 2). We do not consider the




Figure 3: The high-level architecture of the neural topic segmentation model proposed in Xing et al. (2020).

intra-sentence task (EDU-to-sentence), as individually tackled by Lin et al. (2019) with great success.

3.1 Topic Segmentation Model

The topic segmentation task is commonly interpreted as a sequence labeling problem. Formally, given a document d in the form of a sequence of sentences $\{s_1, s_2, ..., s_k\}$, a topic segmentation model assigns a probability score to each sentence s_i for i in [1, ..., k-1], generating a sequence of probabilities $P = \{p(s_1), p(s_2), ..., p(s_{k-1})\}$ with $p(s_i) \in [0, 1]$ indicating how likely sentence s_i is the end of a segment².

Based on the set of probability scores P and an additional threshold τ , determined on a held-out development set, topic segmentation models make binary predictions, labeling sentences with a probability larger than τ as the "end of segment", or "within segment" otherwise. Here, instead of converting the probabilities into discrete sentence boundary labels, we utilize the real-valued probability scores as our signal for distant supervision to infer RST-style discourse trees.

The high-level architecture of the neural topic segmentation model (Xing et al. 2020) we use in this paper is shown in Figure 3. Architecturally based on the proposal in Koshorek et al. (2018), the selected approach extends a hierarchical BiLSTM network by adding a BERT encoder as well as an auxiliary coherence prediction module and restricted selfattention, shown to improve the model's effectiveness for context modeling. Since the topic segmentation task is generally applied on sentence level, any discourse tree generated based on its output can by definition only cover structures on and above sentence level (i.e., where leaf nodes represent sentences). The effectiveness of our selected topic segmentation model is demonstrated in Table 1, showing our approach to yield superior performance over its direct competitors (described in Section 4.2) across all three evaluation corpora (described in Section 4.1).

3.2 Tree Generation

To convert the sequential outputs of the topic segmentation model into tree structures, we follow the intuition that the value at position i in the output of the topic segmentation model, namely the likelihood of s_i being the end of

¹We overload the term "paragraph", also referring to what in other places is called "sections".

²The last sentence s_k does not need to be scored, since it is by definition the end of the last segment.

Model	Wiki	RST-DT	GUM
TextTiling (1997)	62.5 ± 0.00	44.3 ± 0.00	51.6 ± 0.00
BayesSeg (2008)	38.6 ± 0.00	37.5 ± 0.00	49.8 ± 0.00
GraphSeg (2016)	43.2 ± 0.00	58.7 ± 0.00	53.9 ± 0.00
Koshorek et al. (2018)	27.9 ± 0.12	26.9 ± 0.49	48.0 ± 1.37
Xing et al. (2020)	$\textbf{25.1} \pm \textbf{0.07}$	$\textbf{25.4} \pm \textbf{0.33}$	$\textbf{40.8} \pm \textbf{1.64}$

Table 1: Average topic segmentation performance \pm standard deviation over 5 runs, using the P_k error score (Beeferman, Berger, and Lafferty 1999) (lower values indicate better performance) on three evaluation corpora. Best performance per column in **bold**.

a thematically-coherent segment, can be interpreted as the topical distance between s_i and s_{i+1} . A natural way to exploit the output of the topic segmentation model is to create a binary discourse tree by applying a greedy top-down algorithm where text spans (i.e., sub-trees) are determined recursively by splitting the two sentences with the largest topical distance. A small-scale example for this approach is shown in Figure 4. Here, we first search for the sentence $s_{max} =$ $\operatorname{argmax}_{s_i \in d} p(s_i)$ with the maximum probability in P, making it our segmentation point. We then segment the sequence P into two sub-sequences: $P_l = \{p(s_1), p(s_2), ..., p(s_{max})\}$ (left portion) and $P_r = \{p(s_{max+1}), p(s_{max+2}), ..., p(s_k)\}$ (right portion). Next, we mark s_{max} as a previously selected segmentation point by setting $p(s_{max}) = 0.0$. We then recursively repeat this process for the two sub-sequences in a divide-and-conquer style, until all sentence probabilities are set to 0.0. Noticeably, the bottom-up greedy strategy is equivalent to the top-down approach in our case.

Besides the greedy approach described above, a commonly used tree-aggregation technique to convert a realvalued sequence into a binary tree structure is the optimal CKY dynamic programming algorithm, as previously used for distantly supervised discourse parsing in Huber and Carenini (2020b) and Xiao, Huber, and Carenini (2021). However, applying the CKY algorithm to the real-valued topic-break probabilities is problematic, since the output of any topic segmentation model only contains a single sequence. The intuitive way to fill the CKY matrix is to start merging any two consecutive units s_i and s_{i+1} with the score $p(s_i)$ of the former unit s_i and assigning the new (merged) span the aggregation score of the latter, here $p(s_{i+1})$. Applying this strategy using the dynamic programming approach, every tree-candidate receives the same likelihood to represent the document at hand, due to the commutativity property of the subtree aggregation (see Figure 5 for an example). In order to address this issue, additional hyper-parameters can be introduced, such as an attribute to quantify the benefit of merging low-probability sentences early on, and delaying likely topic-breaks. We explore this extended version of the CKY approach using a set of fixed discount factors. In preliminary experiments, we found that this adaption of the CKY approach, despite being theoretically superior, is in practice inferior to the greedy approach, showing unstable performance and resulting in heavily balanced/imbalanced trees for large/small discount factors, respectively. As a re-




Figure 4: Greedy top-down tree generation approach.

sult, we leave the task of finding a more effective discounting function to future work and focus on the superior greedy top-down approach (as illustrated in Figure 4) in this paper.

4 Evaluation

4.1 Datasets

We use three diverse datasets to train the topic segmentation models. We randomly sample a subset of Wikipedia articles from the Wikipedia dump³, strictly following the sampling scheme in Koshorek et al. (2018) (from here on called Wiki). Our Wiki corpus consists of 20,000 documents, consistent in size with previously proposed topic segmentation training corpora, such as the Wiki-Section dataset (Arnold et al. 2019), originally used in the top-performing model by Xing et al. (2020). In contrast to the popular Wiki-Section dataset, which extracts a strictly domain-limited subset of Wikipedia, exclusively covering webpages on cities and diseases, we lift this topic restriction by uniformly sampling from all of Wikipedia. We split our Wiki dataset into training, validation and test sets using the default 80%, 10%, 10% data-split. We further train the topic segmentation model on the RST-DT (Carlson, Okurowski, and Marcu 2002) and GUM (Zeldes 2017) corpora. While RST-DT exclusively contains news articles from the Wall Street Journal dataset, the additional GUM treebank used in our experiments covers a mixture of 12 different genres, including interviews, news stories, academic writing and conversations. Since the two discourse corpora do not have any explicit human-annotated topic segment boundaries, we use paragraph breaks contained in the textual representation of the data as topic-shift indicators for the training of topic segmentation models. Please note that we do not use any human-annotated discourse structures during the training procedure of the topic segmentation model.

The key statistics of all three datasets are presented in Table 2.

4.2 Baselines

We compare our distantly supervised model against three sets of baselines: (1) Simple, but oftentimes competitive structural and random baselines, including *Right-Branching*,

³https://dumps.wikimedia.org/enwiki/ latest/enwiki-latest-pages-articles.xml.bz2




Figure 5: Problematic CKY aggregation without the use of discounting. All trees receive the same final score.

Left-Branching and Random Trees. (2) Completely supervised models, including the traditional Two-Stage model (Wang, Li, and Wang 2017) trained within- and cross-domain, as well as the recently proposed neural SpanBERT approach⁴ (Guz and Carenini 2020a). (3) Distantly supervised models, exploiting signals from auxiliary tasks with available, large-scale training data. We compare our results against the model by Huber and Carenini (2020b), training the Two-Stage parser on the MEGA-DT discourse treebank⁵ inferred from sentiment analysis, and the model by Xiao, Huber, and Carenini (2021), directly computing discourse structures from an extractive summarization model trained on the CNN-DM dataset.

For topic segmentation, we compare the model proposed in Xing et al. (2020) against three widely applied unsupervised baselines: *TextTiling* (Hearst 1997), *BayesSeg* (Eisenstein and Barzilay 2008) and *GraphSeg* (Glavaš, Nanni, and Ponzetto 2016), and a competitive supervised model by Koshorek et al. (2018) (see Table 1).

4.3 Experimental Design

Given that our newly proposed RST-style tree generation strategy can only be applied on and above sentence level, we cannot directly compare our model with results provided in the literature, generally evaluating complete discourse trees from EDU-to-document level. In order to fairly compare against baselines and previously proposed models, and to provide a better understanding of how our proposal performs on different textual levels of the document (as depicted in Figures 1 and 2), we design a set of comparisons extending the regular evaluation technique for complete discourse trees. More specifically, instead of just computing the micro-average performance for a complete document (i.e., EDU-to-document), we aim to investigate the structural performance on sentence-to-document (S-D), sentence-toparagraph (S-P) and paragraph-to-document (P-D) level, allowing us to observe discourse tree generation trends on dif-

Dataset	Wiki	RST-DT	GUM
# of Docs.	20,000	385	150
# of Para./Doc.	31.1	9.99	12.3
# of Sents./Doc.	144.9	22.5	49.3
# of EDUs/Doc.	×	56.6	114.2
# of EDUs/Para.	×	5.67	9.29
# of EDUs/Sent.	×	2.51	2.32

Table 2: Statistics of the three training/testing datasets.

ferent levels of the document. Therefore, complete (EDU-to-document) gold tree structures need to be trimmed to: (1) only contain nodes covering a complete unit of the lower-bound of measure (e.g., sentences in S-D/S-P) and (2) do not contain any nodes covering multiple units of the upper-bound of measure (e.g., paragraphs in S-P). Hence, we propose to trim and restrict discourse trees with the following two strategies:

Trimming Trees to the Lower-Bound: Assuming we want to trim the discourse tree up to the sentence level (however, similarly applicable for paragraphs), we aim to remove all intra-sentence sub-trees that do not cover at least a complete sentence. In other words, assuming we have a sequence of EDUs: $E = \{e_1, e_2, ...e_m\}$, we keep a node n spanning e_i to e_j in the discourse tree iff $sent(e_i) \neq sent(e_j)$ or $e_i.is_beginning(sent_k) \land e_j.is_end(sent_k)$, with $sent(\cdot)$ returning the sentence assignment of an EDU. Subsequently, we update the node $n = (e_i, e_j)$ to $n = (sent(e_i), sent(e_j))$. While this approach works for complete sentence sub-trees, we follow the additional rules presented in Sporleder and Lascarides (2004) for potentially leaky sentence-level trees (about 5% of gold-standard trees in RST-DT (Joty, Carenini, and Ng 2015)).

Leaky Sub-Tree Aggregation: Following the approach presented in Sporleder and Lascarides (2004), we replace leaky sentences with a single node $n = (sent(e_i), sent(e_j))$ and attach it depending on the largest intra-sentence subtree (e.g. if for a sentence containing 5 EDUs a sub-tree containing the first 3 EDUs is attached to the previous sentence and the sub-tree containing the last 2 EDUs is combined with the following sentence, we attach it to the previous sentence). In case of ties we attach the sentence to the right neighbour, as done in Sporleder and Lascarides (2004). Furthermore, since parts of the leaky sentences are propagated into larger sub-trees in the original structure, we recursively update the complete tree to be consistent in regards to the sentence assignment described above.

Restricting Trees to the Upper-Bound: Regarding the restriction of trees to selected upper-bounds (here exemplified on paragraph level), we remove any node n covering sentences s_i to s_j iff $para(s_i) \neq para(s_j)$ with $para(\cdot)$ returning the paragraph assignment of a sentence.

4.4 Experiments and Results

We show the RST parseval discourse structure performance of each model on the sentence-to-paragraph (S-P), paragraph-to-document (P-D) and finally sentence-to-

⁴We additionally show the results for two more supervised parsers proposed in Kobayashi et al. (2020) and Jiang et al. (2021) in Appendix A.

⁵www.github.com/nlpat/MEGA-DT

Model	S-P	P-D	S-D
Baselines			
Random*	<u>77.11</u>	63.90	60.20
Right-Branching	73.57	<u>65.50</u>	59.46
Left-Branching	72.41	64.07	58.07
Supervised RST-style P	arsers		
Two-Stage _{GUM} (2017)	88.82	65.63	69.58
Two-Stage _{RST-DT} (2017)	90.64	68.09	72.11
SpanBERT _{RST-DT} (2020a)	<u>90.75</u>	<u>76.03</u>	<u>77.19</u>
Distantly Supervised RST-st	yle Parse	ers	
Xiao, Huber, and Carenini (2021) _{CNN/DM}	74.23	66.15	59.10
Two-Stage _{MEGA-DT} (2020b)	<u>85.00</u>	65.50	66.99
TS_{RST-DT}	84.34	62.52	65.96
TS_{Wiki}	83.43	<u>69.78</u>	<u>68.13</u>
$TS_{Wiki+RST-DT}$	83.84	66.54	65.84
Ablation – TS _{Wiki}	83.51	68.61	67.47

Table 3: Evaluation results using the RST Parseval microaverage precision measure on the RST-DT dataset. Subscripts indicate training dataset. TS = Topic Segmentation Model. * = Average performance over 10 runs. Best performance per sub-table <u>underlined</u>, best performance per column **bold**.

document (S-D) level in Tables 3 and 4 for RST-DT and GUM respectively⁶. Our results are thereby subdivided into sub-tables according to the type of supervision used. The top sub-tables contain unsupervised baselines generating either random trees or completely right-/left-branching structures on the evaluated levels. The second set of results (in the center sub-tables) contain supervised discourse parsers, and the bottom sub-tables show distantly supervised models, including our results. To evaluate the ability of our proposal to generate domain-independent discourse structures, we compare the Topic Segmenter (TS) trained on in-domain data $(TS_{RST-DT/GUM}^{7})$, the out-of-domain Wiki corpus (TS_{Wiki}) as well as a "fine-tuned" approach, first trained on the Wiki corpus, and subsequently fine-tuned on RST-DT or GUM (TS_{Wiki+RST-DT/GUM}). Finally, to further assess the role of the context modeling component (coherence module and restricted self-attention) in regards to the performance of topic segmentation as the distant supervised task for discourse tree generation, we ablate the context modeling component (red/green parts in Figure 3) as "Ablation - TSWiki" in the last row of both tables.

Not surprisingly, when evaluating discourse structures on the RST-DT dataset (Table 3), supervised models generally outperform unsupervised baselines and distantly supervised models. Assessing the bottom sub-table in more detail, it becomes clear that while the Two-Stage parser trained on MEGA-DT achieves the best performance on the sentence-

Model	S-P	P-D	S-D
Baselines			
Random*	67.53	60.96	57.99
Right-Branching	64.15	72.71	<u>59.39</u>
Left-Branching	62.07	54.35	51.56
Supervised RST-style P	arsers		
Two-Stage _{RST-DT} (2017)	74.20	63.29	63.65
Two-Stage _{GUM} (2017)	<u>76.70</u>	<u>72.94</u>	<u>68.38</u>
Distantly Supervised RST-st	yle Parse	ers	
Xiao, Huber, and Carenini (2021) _{CNN-DM}	67.89	57.80	53.82
Two-Stage _{MEGA-DT} (2020b)	73.37	69.88	64.69
TS_{GUM}	72.54	67.60	62.79
TS_{Wiki}	<u>76.98</u>	63.53	65.84
$TS_{Wiki+GUM}$	74.48	67.29	64.69
Ablation – TS _{Wiki}	75.94	64.71	65.38

Table 4: Evaluation results using the RST Parseval microaverage precision measure on the GUM dataset. Subscripts indicate training dataset. TS = Topic Segmentation Model. * = Average performance over 10 runs. Best performance per sub-table underlined, best performance per column **bold**.

to-paragraph level, our model solely trained on the Wiki dataset performs best on the paragraph-to-document and sentence-to-document level, showing that (1) obtaining discourse structures from topic segmentation effectively supports high-level discourse parsing and (2) general out-ofdomain training on large-scale data (TSwiki) performs better than models trained or fine-tuned on in-domain data (TS_{RST-DT} and TS_{Wiki+RST-DT} respectively). We believe that a possible explanation for the surprising under-performance of the in-domain training described above could originate from the limited size of the RST-DT dataset, as well as the mismatch between the "granularity" of segment information in Wikipedia and RST-DT (see Table 2), where the average number of sentences per segment is about twice as large in Wikipedia than RST-DT. Plausibly, the larger segments in Wikipedia better support higher-level discourse structures (which cover larger text spans), leading to superior performance, with the RST-DT fine-tuning step (at finer granularity) introducing the mismatch, and therefore not delivering the expected benefits.

Our evaluation results on the GUM dataset (Table 4) show similar trends to the evaluation on RST-DT. Our in-domain trained and further fine-tuned models in the bottom sub-table do not achieve improved performances compared to the out-of-domain TS_{Wiki} model. We believe a possible explanation for this phenomenon is the mix of domains within the small GUM training portion, resulting in the fine-tuning step mixing noisy signals from different genres, hence not providing consistent improvements over Wikipedia. Interestingly however, there are some observations which differ from RST-DT: (1) Unlike for RST-DT, our distantly supervised model trained on *Wiki* even outperforms supervised approaches on sentence-to-document level. (2) Right-branching trees out-

⁶We present original parseval scores, as recommended in Morey, Muller, and Asher (2017) in Appendix A.

⁷Please note that even though we use the RST-DT/GUM datasets, we do not use any discourse tree annotation.

Genre	RB	2S _{GUM}	2S _{RST-DT}	TS _{Wiki}	TS _{GUM}
Travel guides	78.1	75.0	65.6	53.1	68.8
Biographies	75.0	78.6	60.7	78.6	71.4
Fiction	80.6	80.6	61.1	61.1	61.1
How-to guides	69.4	64.3	59.2	66.3	75. 5
Academic writing	70.4	81.5	74.1	70.4	63.0
News stories	57.4	57.4	61.8	63.2	69.1
Political speeches	80.0	85.0	70.0	60.0	55.0
Textbooks	78.6	71.4	64.3	57.1	71.4
Interviews	78.8	83.3	66.7	60.6	60.6

Table 5: RST Parseval micro-average precision on paragraph-to-document level for genres in the GUM corpus. Sample(s) in "Vlog" & "Conversation" only contain a single paragraph and are therefore omitted. RB=Right-Branching, 2S=Two-Stage parser, TS=Topic Segmentation model.




Figure 6: Positive example (wsj_1346) with 100% structural overlap between prediction and RST-DT gold-label annotation. Gold paragraphs p_n are indicated by solid lines. Leaves are sentences.

perform random trees, which hasn't been the case on the RST-DT dataset and (3) the paragraph-to-document (P-D) level differs from previous results, with the right-branching baseline reaching a performance close to the best supervised model (Two-Stage_{GUM}), outperforming the out-of-domain supervised model (Two-Stage_{RST-DT}) and all distantly supervised approaches.

Regarding the ablation studies, our results shown in the last row of Tables 3 and 4 imply that the context modeling component, shown to boost the topic segmentation performance, can also consistently benefit the high-level discourse structure inference on S-D level.

We refer readers to Appendix A for results on additional evaluation levels (e.g., EDU-to-sentence and EDU-to-paragraph) using the RST and original parseval scores.

To further investigate the performance on paragraph-to-document level for the GUM corpus, we show a comparison by genre for the surprisingly high performing right-branching baseline, the two supervised models and our methods based on *Wiki* and *GUM* in Table 5. Right-branching trees thereby achieve the best performance in 3 out of the 9 genres, including textbooks and fiction. Supervised methods perform best on 5 out of the 9 genres, including highly structured domains such as academic writing




Figure 7: Random example (wsj_1380) with 80.77% structural overlap between prediction (top) and RST-DT gold-label annotation (bottom). Gold paragraphs p_n are indicated by solid lines. Leaves are sentences.

and interviews. Our distantly supervised model trained on Wikipedia reaches the best performance on biographies and the topic segmentation model trained on GUM achieves the highest score on how-to guides and news articles. Furthermore, as expected, the supervised parser trained on RST-DT (i.e., the news domain) performs well on the news genre. Overall, while these mixed results appear to align well with our intuition on the prevalent structures in certain genres, further research is required to better understand the relationship between modelling decisions and their impact on different discourse structures across genres.

To complement our quantitative evaluation, we show a set of predicted trees and their respective gold-label structures for well captured above-sentence discourse (Figure 6), randomly selected documents (Figure 7) and poorly captured samples (Figure 8). Similar results for the GUM corpus are shown in Figures 9, 10 and 11 in Appendix B.

Overall, inspecting a large number of tree-structures along with their gold-labels, we recognize that the generated trees are slightly more balanced than the respective gold-label trees (see for example Figures 7 and 8), however generally represent non-trivial structures, oftentimes well-aligned with major topic shifts and high-level discourse.

5 Conclusions and Future Work

In this paper, we show that topic segmentation can provide useful signals for high-level discourse constituency tree structure generation. Comparing multiple aggregation approaches, our proposal using a greedy top-down algorithm performs well when applied on two popular gold-standard discourse treebanks, namely RST-DT and GUM. We provide a detailed evaluation based on textual levels in documents, giving insights into the strength and weaknesses of simple baselines, previously proposed models and our new, distantly supervised approach using topic segmentation, on sentence, paragraph and document level. We show addi-




Figure 8: Negative example (wsj_1365) with 55.56% structural overlap between prediction (top) and RST-DT gold-label annotation (bottom). Gold paragraphs p_n are indicated by solid lines. Leaves are sentences.

tional insights into our modelling approach through an ablation study, per-genre evaluations and qualitative tree generation samples.

For the future, in the short term we plan to investigate alternative non-greedy tree aggregation strategies, such as variations of the CKY approach mentioned in section 3.2. Next, we want to explore if the synergy between discourse parsing and topic segmentation is bidirectional, incorporating discourse signals to improve topic segmentation models. Finally, inspired by the approach described in Kobayashi et al. (2019), we also plan to use dense representations of neural topic segmentation models to infer discourse structures with nuclearity and relation labels, to obtain more complete trees by solely exploiting distant supervision from topic segmentation.

Acknowledgements

We thank the anonymous reviewers and the UBC NLP group for their insightful comments and suggestions. This research was supported by the Language & Speech Innovation Lab of Cloud BU, Huawei Technologies Co., Ltd and the Natural Sciences and Engineering Research Council of Canada (NSERC). Nous remercions le Conseil de recherches en sciences naturelles et en génie du Canada (CRSNG) de son soutien.

References

Arnold, S.; Schneider, R.; Cudré-Mauroux, P.; Gers, F. A.; and Löser, A. 2019. SECTOR: A Neural Model for Coherent Topic Segmentation and Classification. *Transactions of the Association for Computational Linguistics*, 7: 169–184.

Beeferman, D.; Berger, A.; and Lafferty, J. 1999. Statistical Models for Text Segmentation. *Machine Learning*, 34(1): 177–210.

Bhatia, P.; Ji, Y.; and Eisenstein, J. 2015. Better Document-level Sentiment Analysis from RST Discourse Parsing. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 2212–2218. Lisbon, Portugal: Association for Computational Linguistics.

Carlson, L.; Okurowski, M. E.; and Marcu, D. 2002. *RST discourse treebank*. Linguistic Data Consortium, University of Pennsylvania.

Chakrabarty, T.; Hidey, C.; Muresan, S.; McKeown, K.; and Hwang, A. 2019. AMPERSAND: Argument Mining for PERSuAsive oNline Discussions. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 2933–2943. Hong Kong, China: Association for Computational Linguistics.

Du, L.; Buntine, W.; and Johnson, M. 2013. Topic Segmentation with a Structured Topic Model. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 190–200. Atlanta, Georgia: Association for Computational Linguistics.

Eisenstein, J.; and Barzilay, R. 2008. Bayesian Unsupervised Topic Segmentation. In *Proceedings of the 2008 Conference on Empirical Methods in Natural Language Processing*, 334–343. Honolulu, Hawaii: Association for Computational Linguistics.

Gerani, S.; Mehdad, Y.; Carenini, G.; Ng, R. T.; and Nejat, B. 2014. Abstractive Summarization of Product Reviews Using Discourse Structure. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 1602–1613. Doha, Qatar: Association for Computational Linguistics.

Glavaš, G.; Nanni, F.; and Ponzetto, S. P. 2016. Unsupervised Text Segmentation Using Semantic Relatedness Graphs. In *Proceedings of the Fifth Joint Conference on Lexical and Computational Semantics*, 125–130. Berlin, Germany: Association for Computational Linguistics.

Guz, G.; and Carenini, G. 2020a. Coreference for Discourse Parsing: A Neural Approach. In *Proceedings of the First Workshop on Computational Approaches to Discourse*, 160–167. Online: Association for Computational Linguistics.

Guz, G.; and Carenini, G. 2020b. Towards Domain-Independent Text Structuring Trainable on Large Discourse Treebanks. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, 3141–3152. Online: Association for Computational Linguistics.

Hearst, M. A. 1997. Text Tiling: Segmenting Text into Multi-paragraph Subtopic Passages. *Computational Linguistics*, 23(1): 33–64.

Hogenboom, A.; Frasincar, F.; De Jong, F.; and Kaymak, U. 2015. Using rhetorical structure in sentiment analysis. *Commun. ACM*, 58(7): 69–77.

Huber, P.; and Carenini, G. 2019. Predicting Discourse Structure using Distant Supervision from Sentiment. In

- Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), 2306–2316. Hong Kong, China: Association for Computational Linguistics.
- Huber, P.; and Carenini, G. 2020a. From Sentiment Annotations to Sentiment Prediction through Discourse Augmentation. In *Proceedings of the 28th International Conference on Computational Linguistics*, 185–197. Barcelona, Spain (Online): International Committee on Computational Linguistics.
- Huber, P.; and Carenini, G. 2020b. MEGA RST Discourse Treebanks with Structure and Nuclearity from Scalable Distant Sentiment Supervision. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 7442–7457. Online: Association for Computational Linguistics.
- Huber, P.; and Carenini, G. 2021. Unsupervised Learning of Discourse Structures using a Tree Autoencoder. *arXiv* preprint arXiv:2012.09446.
- Ji, Y.; and Eisenstein, J. 2014. Representation Learning for Text-level Discourse Parsing. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 13–24. Baltimore, Maryland: Association for Computational Linguistics.
- Ji, Y.; and Smith, N. A. 2017. Neural Discourse Structure for Text Categorization. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics* (*Volume 1: Long Papers*), 996–1005. Vancouver, Canada: Association for Computational Linguistics.
- Jiang, F.; Fan, Y.; Chu, X.; Li, P.; Zhu, Q.; and Kong, F. 2021. Hierarchical Macro Discourse Parsing Based on Topic Segmentation. In *Proceedings of the AAAI Conference on Artificial Intelligence*.
- Joty, S.; Carenini, G.; and Ng, R. T. 2015. CODRA: A Novel Discriminative Framework for Rhetorical Analysis. *Computational Linguistics*, 41(3): 385–435.
- Jurafsky, D.; and Martin, J. H. 2014. *Speech and language processing*, volume 3. Pearson London.
- Kobayashi, N.; Hirao, T.; Kamigaito, H.; Okumura, M.; and Nagata, M. 2020. Top-Down RST Parsing Utilizing Granularity Levels in Documents. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, 8099–8106.
- Kobayashi, N.; Hirao, T.; Nakamura, K.; Kamigaito, H.; Okumura, M.; and Nagata, M. 2019. Split or Merge: Which is Better for Unsupervised RST Parsing? In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 5797–5802. Hong Kong, China: Association for Computational Linguistics.
- Koshorek, O.; Cohen, A.; Mor, N.; Rotman, M.; and Berant, J. 2018. Text Segmentation as a Supervised Learning Task. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Pa-*

- *pers*), 469–473. New Orleans, Louisiana: Association for Computational Linguistics.
- Lin, X.; Joty, S.; Jwalapuram, P.; and Bari, M. S. 2019. A Unified Linear-Time Framework for Sentence-Level Discourse Parsing. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 4190–4200. Florence, Italy: Association for Computational Linguistics.
- Mann, W. C.; and Thompson, S. A. 1988. Rhetorical structure theory: Toward a functional theory of text organization. *Text-Interdisciplinary Journal for the Study of Discourse*, 8(3): 243–281.
- Marcu, D. 1999. Discourse Trees are Good Indicators of Importance in Text. *Advances in Automatic Text Summa-rization*, 123–136.
- Marcu, D. 2000. The theory and practice of discourse parsing and summarization. MIT press.
- Morey, M.; Muller, P.; and Asher, N. 2017. How much progress have we made on RST discourse parsing? A replication study of recent results on the RST-DT. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, 1319–1324. Copenhagen, Denmark: Association for Computational Linguistics.
- Nejat, B.; Carenini, G.; and Ng, R. 2017. Exploring Joint Neural Model for Sentence Level Discourse Parsing and Sentiment Analysis. In *Proceedings of the 18th Annual SIGdial Meeting on Discourse and Dialogue*, 289–298. Saarbrücken, Germany: Association for Computational Linguistics.
- Nishida, N.; and Nakayama, H. 2020. Unsupervised Discourse Constituency Parsing Using Viterbi EM. *Transactions of the Association for Computational Linguistics*, 8: 215–230.
- Prasad, R.; Dinesh, N.; Lee, A.; Miltsakaki, E.; Robaldo, L.; Joshi, A.; and Webber, B. 2008. The Penn Discourse Tree-Bank 2.0. In *Proceedings of the Sixth International Conference on Language Resources and Evaluation (LREC'08)*. Marrakech, Morocco: European Language Resources Association (ELRA).
- Riedl, M.; and Biemann, C. 2012. TopicTiling: A Text Segmentation Algorithm based on LDA. In *Proceedings of ACL 2012 Student Research Workshop*, 37–42. Jeju Island, Korea: Association for Computational Linguistics.
- Shiv, V.; and Quirk, C. 2019. Novel positional encodings to enable tree-based transformers. In Wallach, H.; Larochelle, H.; Beygelzimer, A.; d'Alché-Buc, F.; Fox, E.; and Garnett, R., eds., *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc.
- Sporleder, C.; and Lascarides, A. 2004. Combining Hierarchical Clustering and Machine Learning to Predict High-Level Discourse Structure. In *COLING 2004: Proceedings of the 20th International Conference on Computational Linguistics*, 43–49. Geneva, Switzerland: COLING.
- Stede, M. 2011. Discourse processing. *Synthesis Lectures on Human Language Technologies*, 4(3): 1–165.

- Subba, R.; and Di Eugenio, B. 2009. An effective Discourse Parser that uses Rich Linguistic Information. In *Proceedings of Human Language Technologies: The 2009 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, 566–574. Boulder, Colorado: Association for Computational Linguistics.
- Wang, Y.; Li, S.; and Wang, H. 2017. A Two-Stage Parsing Method for Text-Level Discourse Analysis. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, 184–188. Vancouver, Canada: Association for Computational Linguistics.
- Wang, Y.; Li, S.; and Yang, J. 2018. Toward Fast and Accurate Neural Discourse Segmentation. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, 962–967. Brussels, Belgium: Association for Computational Linguistics.
- Xiao, W.; Huber, P.; and Carenini, G. 2020. Do We Really Need That Many Parameters In Transformer For Extractive Summarization? Discourse Can Help! In *Proceedings of the First Workshop on Computational Approaches to Discourse*, 124–134. Online: Association for Computational Linguistics.
- Xiao, W.; Huber, P.; and Carenini, G. 2021. Predicting Discourse Trees from Transformer-based Neural Summarizers. *arXiv preprint arXiv:2104.07058*.
- Xing, L.; Hackinen, B.; Carenini, G.; and Trebbi, F. 2020. Improving Context Modeling in Neural Topic Segmentation. In *Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing*, 626–636. Suzhou, China: Association for Computational Linguistics.
- Xu, J.; Gan, Z.; Cheng, Y.; and Liu, J. 2020. Discourse-Aware Neural Extractive Text Summarization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 5021–5031. Online: Association for Computational Linguistics.
- Yu, N.; Zhang, M.; and Fu, G. 2018. Transition-based Neural RST Parsing with Implicit Syntax Features. In *Proceedings of the 27th International Conference on Computational Linguistics*, 559–570. Santa Fe, New Mexico, USA: Association for Computational Linguistics.
- Zeldes, A. 2017. The GUM Corpus: Creating Multilayer Resources in the Classroom. *Language Resources and Evaluation*, 51(3): 581–612.

A Complete Quantitative Results

We show the complete quantitative results, including the previously shown Sentence-to-Paragraph (S-P), Paragraph-to-Document (P-D) and Sentence-to-Document (S-D) performance, as well as the additional EDU-to-Sentence (E-S), EDU-to-Paragraph (E-P), EDU-to-Document (E-D) and EDU-to-Sentence-to-Document (E-S-D) sub-tree results here. Tables 6 and 7 contain the RST parseval scores on the RST-DT and GUM corpus, respectively. Table 8 contains the full results of the original parseval score applied to RST-DT and Table 9 shows the original parseval performance on GUM. Besides the additional performance evaluations also covering low-level structures for the baseline models (E-S, E-P, E-D and E-S-D), we show an additional model, combining the out-of-the-box discourse segmenter by Wang, Li, and Yang (2018) with our above-sentence tree structures generated from topic-segmentation in the last row of Tables 6, 7, 8 and 9 (*Combined – TSwiki/Disc-Seg*). Since we combine strictly intra-sentence structures from the discourse segmenter with strictly above-sentence trees, this approach does not support leaky EDUs, and hence constitutes E-S-D structures (as compared to non sentence limited E-D trees).

Model	E-S	S-P	P-D	E-P	S-D	E-D	E-S-D		
Baselines									
Random*	70.08	77.11	63.90	64.05	60.20	58.03	70.10		
Right-Branching	64.12	73.57	<u>65.50</u>	58.41	59.46	54.64	<u>74.37</u>		
Left-Branching	63.85	72.41	64.07	57.73	58.07	53.73	70.58		
Super	Supervised RST-style Parsers								
Top-Down _{RST-DT} (2020)	×	×	×	×	×	86.10	86.40		
Two-Stage _{GUM} (2017)	92.57	88.82	65.63	88.62	69.58	81.24	×		
Two-Stage _{RST-DT} (2017)	94.48	90.64	68.09	91.06	72.11	83.90	×		
SpanBERT _{RST-DT} (2020a)	<u>96.27</u>	<u>90.75</u>	<u>76.03</u>	<u>92.87</u>	<u>77.19</u>	<u>87.69</u>	×		
Distantly S	Supervise	d RST-s	tyle Pars	ers					
Xiao, Huber, and Carenini (2021) _{CNN/DM}	85.95	74.23	66.15	78.19	59.10	60.68	75.13		
Two-Stage _{MEGA-DT} (2020b)	89.57	<u>85.00</u>	65.50	84.73	66.99	77.90	×		
TS_{RST-DT}	×	84.34	62.52	×	65.96	×	×		
TS_{Wiki}	×	83.43	<u>69.78</u>	×	<u>68.13</u>	×	×		
$TS_{Wiki+RST-DT}$	×	83.84	66.54	×	65.84	×	×		
Ablation – TS_{Wiki}	×	83.51	68.61	×	67.47	×	×		
Combined – TS _{Wiki} /Disc-Seg	87.10	83.43	69.78	81.67	68.13	×	<u>75.56</u>		

Table 6: Evaluation results using the **RST Parseval** micro-average precision measure on the RST-DT dataset. Subscripts indicate training dataset. TS=Topic Segmentation Model. Disc-Seg=Discourse Segmentation Model by Wang, Li, and Yang (2018). ×=Not feasible combination. *=Average performance over 10 runs. Best performance per sub-table underlined, best performance per column **bold**

Model	E-S	S-P	P-D	E-P	S-D	E-D	E-S-D		
Baselines									
Random*	72.16	67.53	60.96	61.60	57.99	57.24	69.93		
Right-Branching	66.30	64.15	<u>72.71</u>	56.23	59.39	54.71	71.58		
Left-Branching	65.96	62.07	54.35	55.08	51.56	50.77	64.57		
Super	Supervised RST-style Parsers								
Two-Stage _{RST-DT} (2017)	93.51	74.20	63.29	82.74	63.65	77.16	×		
Two-Stage _{GUM} (2017)	93.25	76.70	<u>72.94</u>	<u>83.49</u>	<u>68.38</u>	<u>79.04</u>	×		
Distantly S	Supervise	ed RST-s	tyle Pars	ers					
Xiao, Huber, and Carenini (2021) _{CNN-DM}	88.09	67.89	57.80	76.52	53.82	59.28	72.39		
Two-Stage _{MEGA-DT} (2020b)	88.78	73.37	<u>69.88</u>	78.35	64.69	73.89	×		
TS_GUM	×	72.54	67.60	×	62.79	×	×		
TS_{Wiki}	×	<u>76.98</u>	63.53	×	<u>65.84</u>	×	×		
$TS_{Wiki+GUM}$	×	74.48	67.29	×	64.69	×	×		
Ablation – TS_{Wiki}	×	75.94	64.71	×	65.38	×	×		
Combined – TS _{Wiki} /Disc-Seg	88.58	76.98	63.53	79.30	65.84	×	<u>73.94</u>		

Table 7: Evaluation results using the **RST Parseval** micro-average precision measure on the GUM dataset. Subscripts indicate training dataset. TS=Topic Segmentation Model. Disc-Seg=Discourse Segmentation Model by Wang, Li, and Yang (2018). ×=Not feasible combination. *=Average performance over 10 runs. Best performance per sub-table underlined, best performance per column **bold**

Model	\mathbf{E} - \mathbf{S}	S-P	P-D	E-P	S-D	E-D	E-S-D		
Baselines									
Random*	19.35	22.55	30.61	17.13	21.83	16.06	41.07		
Right-Branching	3.25	7.27	31.62	4.12	19.21	9.27	<u>48.74</u>		
Left-Branching	2.53	3.20	28.79	2.56	16.45	7.45	41.16		
Super	Supervised RST-style Parsers								
MDParser – TS _{RST-DT} (2021)	×	×	40.52	×	×	×	×		
Two-Stage _{GUM} (2017)	79.97	60.76	31.88	73.78	39.38	62.48	×		
Two-Stage _{RST-DT} (2017)	85.10	67.44	36.76	79.40	44.54	70.97	×		
SpanBERT _{RST-DT} (2020a)	<u>90.16</u>	<u>68.69</u>	<u>52.75</u>	<u>83.83</u>	<u>54.37</u>	<u>75.39</u>	×		
Distantly S	Supervise	d RST-s	tyle Pars	ers					
Xiao, Huber, and Carenini (2021) _{CNN-DM}	62.11	9.59	32.09	49.72	18.49	21.36	49.21		
Two-Stage _{MEGA-DT} (2020b)	71.87	47.38	31.62	64.81	34.21	55.81	×		
TS_{RST-DT}	×	45.06	28.02	×	32.17	×	×		
TS_{Wiki}	×	41.86	<u>41.90</u>	×	<u>36.49</u>	×	×		
$TS_{Wiki+RST-DT}$	×	43.31	34.96	×	31.93	×	×		
Ablation – TS_{Wiki}	×	42.15	39.07	×	35.17	×	×		
Combined – TS _{Wiki} /Disc-Seg	65.22	41.86	41.90	57.74	36.49	×	<u>50.95</u>		

Table 8: Evaluation results using the **original Parseval** micro-average precision measure on the RST-DT dataset. Subscripts indicate training dataset. TS=Topic Segmentation Model. Disc-Seg=Discourse Segmentation Model by Wang, Li, and Yang (2018). ×=Not feasible combination. *=Average performance over 10 runs. Best performance per sub-table <u>underlined</u>, best performance per column **bold**

Model	E-S	S-P	P-D	E-P	S-D	E-D	E-S-D		
Baselines									
Random*	18.45	17.83	25.46	15.25	16.71	14.49	43.11		
Right-Branching	1.28	7.35	<u>46.30</u>	3.39	<u>18.78</u>	9.42	<u>43.15</u>		
Left-Branching	0.30	1.97	10.19	0.86	3.11	1.54	29.15		
Super	vised RS	T-style I	Parsers						
Two-Stage _{RST-DT} (2017)	81.00	33.69	27.78	61.90	27.53	54.33	×		
Two-Stage _{GUM} (2017)	80.22	39.78	<u>46.76</u>	<u>63.56</u>	<u>36.75</u>	<u>58.08</u>	×		
Distantly S	Supervise	d RST-s	tyle Pars	ers					
Xiao, Huber, and Carenini (2021) _{CNN-DM}	65.72	7.60	16.75	46.69	7.64	18.56	45.97		
Two-Stage _{MEGA-DT} (2020b)	<u>67.13</u>	31.36	<u>40.74</u>	52.22	29.49	47.79	×		
TS_GUM	×	29.03	37.50	×	25.58	×	×		
TS_{Wiki}	×	<u>40.50</u>	31.02	×	<u>31.68</u>	×	×		
$TS_{Wiki+GUM}$	×	34.05	37.04	×	29.38	×	×		
Ablation $-TS_{Wiki}$	×	37.81	33.33	×	30.76	×	×		
Combined – TS _{Wiki} /Disc-Seg	66.54	40.50	31.02	54.32	31.68	×	<u>47.81</u>		

Table 9: Evaluation results using the **original Parseval** micro-average precision measure on the GUM dataset. Subscripts indicate training dataset. TS=Topic Segmentation Model. Disc-Seg=Discourse Segmentation Model by Wang, Li, and Yang (2018). ×=Not feasible combination. *=Average performance over 10 runs. Best performance per sub-table <u>underlined</u>, best performance per column **bold**

B Qualitative Analysis on GUM

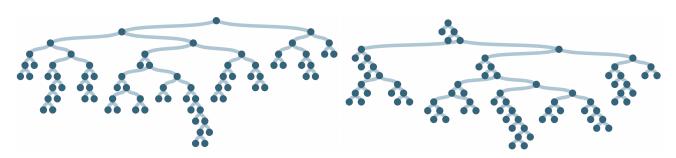


Figure 9: Positive example (GUM_bio_jesperser) with 76.92% structural overlap between prediction (left) and GUM gold-label annotation (right).

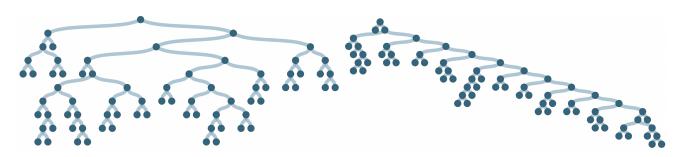


Figure 10: Random example (GUM_voyage_oakland) with 70.83% structural overlap between prediction (left) and GUM gold-label annotation (right).

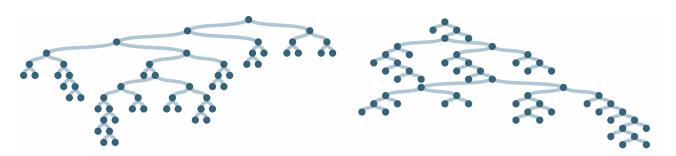


Figure 11: Negative example (GUM_bio_dvorak) with 57.14% structural overlap between prediction (left) and GUM gold-label annotation (right).