


Guide of import Data

- Create a datasource of CS307

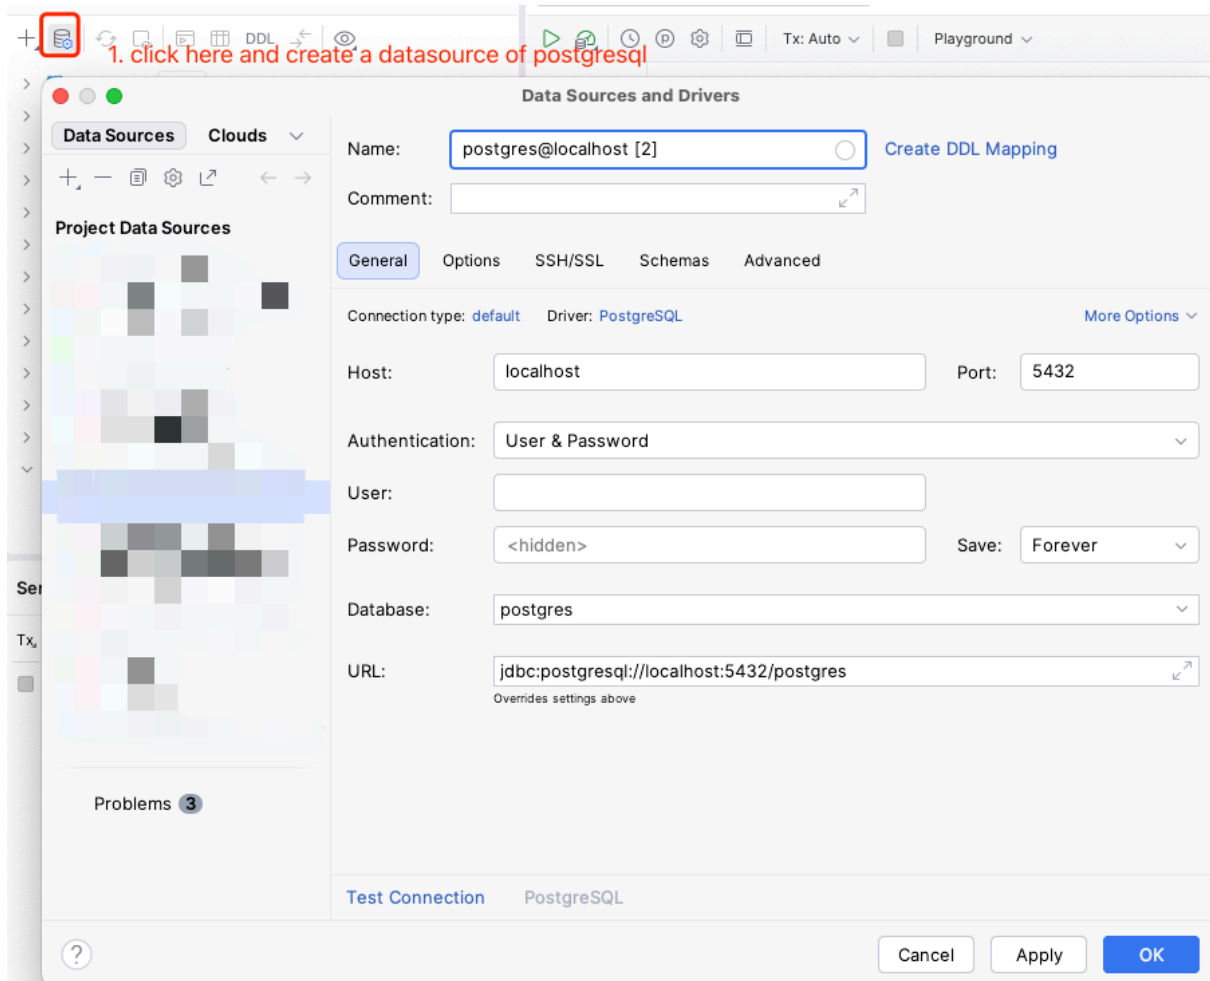

- Fill parameters

Name: [Create DDL Mapping](#)

Comment:

General Options SSH/SSL Schemas Advanced

Connection type: **default** Driver: **PostgreSQL** [More Options](#)

Host: Port:

Authentication: **User & Password**

User: *fill your database user*

Password: *fill the password of user* Save: **Forever**

Database: *fiil database name*

Succeeded [Copy](#)


DBMS: PostgreSQL (ver. 14.1) [✎](#)
 Case sensitivity: plain=lower, delimited=exact
 Driver: PostgreSQL JDBC Driver (ver. 42.7.3, JDBC4.2)

Ping: 62 ms
 SSL: no


Test Connection ✓ PostgreSQL *check connection*

[Cancel](#) [Apply](#) [OK](#)


- Drag `shenzhen_metro.sql` to datagrip respectively.

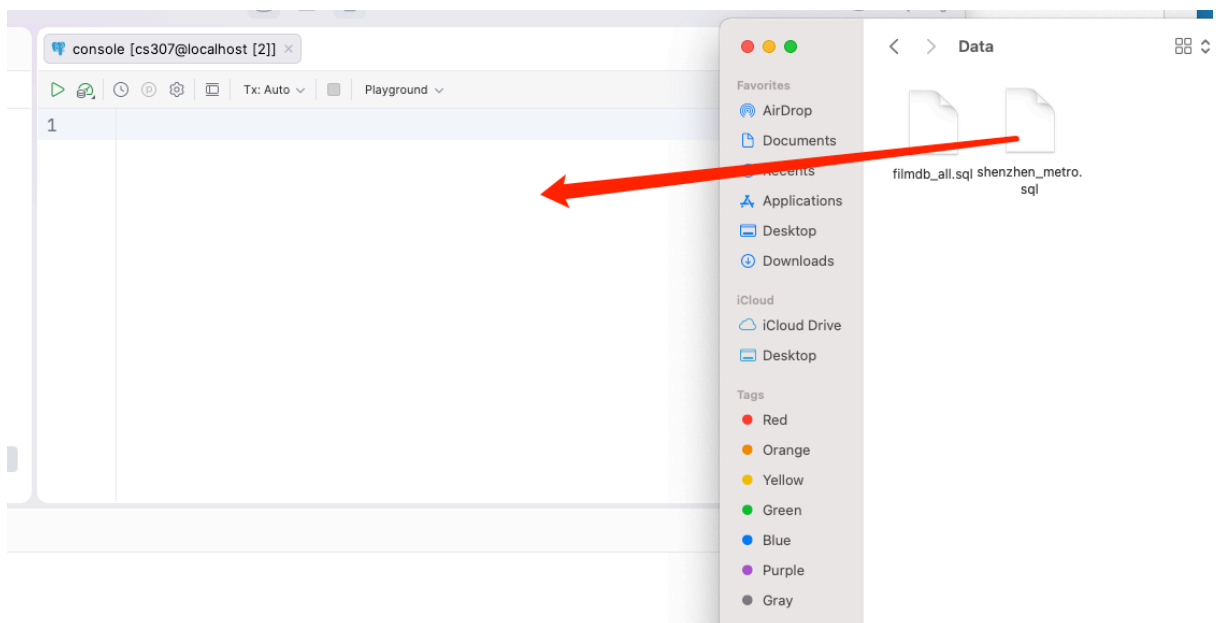

- Click Run `Shenzhen_metro.sql`

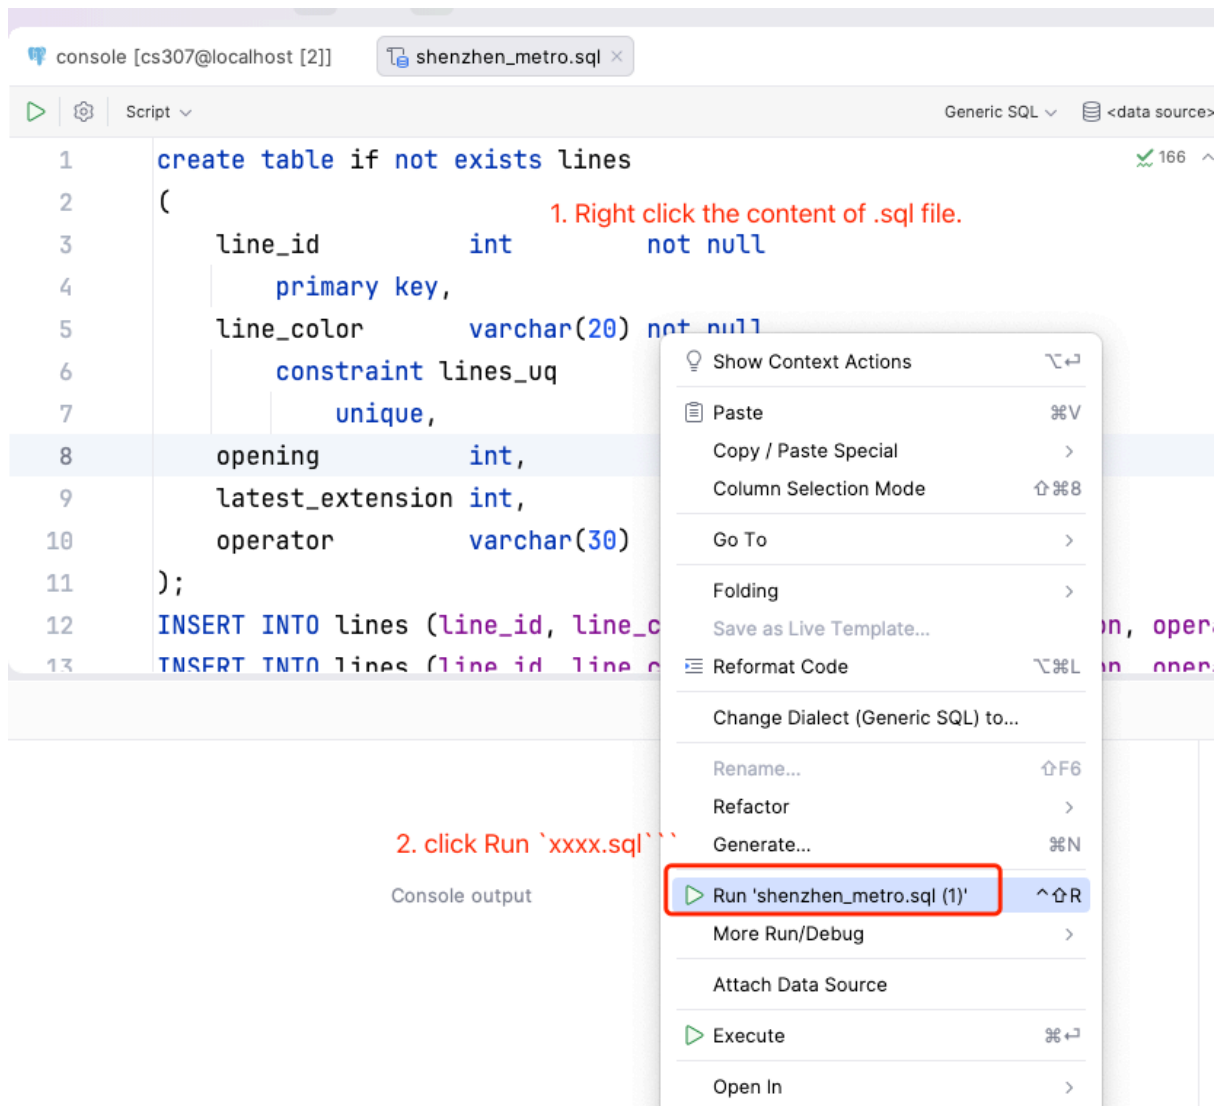

- Select a datasource you want to import.

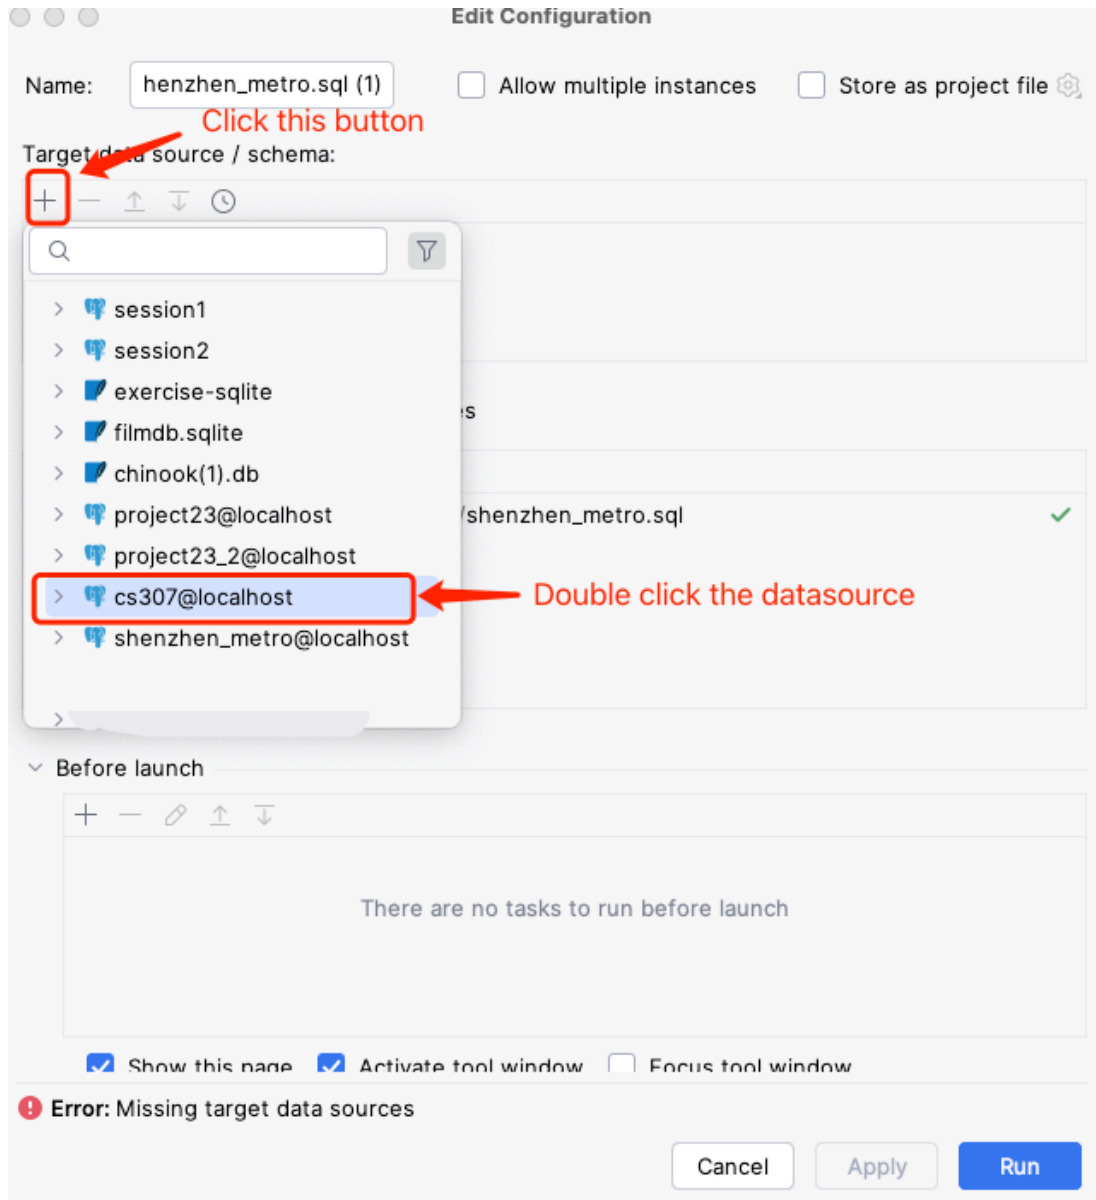

- Then it can run.