## **EPIB 607: Inferential Statistics**

Sahir Bhatnagar and James Hanley 2018-10-25

## **Contents**

I	Preface	5
1	Welcome  1.1 Objectives 1.2 Audience 1.3 About these notes 1.4 R Code Conventions 1.5 Rendering Mathematical Formulae 1.6 Development 1.7 About the authors 1.8 License	7 7 7 8 8 8 8
2	Course Information 2.1 Teaching strategy	11 12 12 12
3		13 13 14 14 14 14
4	4.1 Git	<b>15</b> 15 15
5	5.1 Week 1 5.2 Week 2 5.3 Week 3 5.4 Week 4 5.5 Week 5 5.6 Week 6 5.7 Week 7 5.8 Week 8 5.9 Week 9	17 17 18 19 20 21 23 24 24

CONTENTS
CONTE

	5.12 Week 12          5.13 Week 13          5.14 Week 14	25 25 26
6	Slides	27
7	Polls	29
8	Assignments	31
9	DALITE	33
10	Terms and Concepts	35
II	Part I	37
11	Data Graphics	39
	11.1 Aesthetics or Visual cues	39
	11.2 Coordinate systems	39
	11.3 Scales	41
	11.4 Context	41
	11.5 Facets and layers	41
	11.6 Color	43
	11.7 Examples	46
	11.8 Exercises	50
A	Vectorization, *apply and for loops	53
	A.1 Vectorization	53
	A.2 Family of *apply functions	54
	A.3 Creating dynamic documents with mapply	57

Part I

**Preface** 

### Welcome

Welcome to the course notes for EPIB 607: Inferential Statistics at McGill University.

#### 1.1 Objectives

The aim of this course is to provide students with basic principles of statistical inference so that they can:

- 1. Visualize/Analyze/Interpret data using statistical methods with a computer.
- 2. Understand the statistical results in a scientific paper.
- 3. Apply statistical methods in their own research.
- 4. Use the methods learned in this course as a foundation for more advanced biostatistics courses.

#### 1.2 Audience

The principal audience is researchers in the natural and social sciences who haven't had an introductory course in statistics (or did have one a long time ago). This audience accepts that statistics has penetrated the life sciences pervasively and is required knowledge for both doing research and understanding scientific papers.

#### 1.3 About these notes

These notes are a collection of useful links, videos, online resources and papers for an introductory course in statistics. The instructors have found that no single book sufficiently teaches all the topics covered in this course. Part of this is due to advancements in computing which have far outpaced the publication of modern textbooks. Indeed, the computer has replaced many of the calculations that were traditionally taught to be done by hand. We direct the readers to what we think is a good learning resource for a given topic (following the **Flipped Classroom** strategy). We also provide our own commentary and notes when we think its useful.

8 CHAPTER 1. WELCOME

#### 1.4 R Code Conventions

We use  $\mathbb{R}$  code throughout these notes. When  $\mathbb{R}$  code is displayed it will be typeset using a monospace font with syntax highlighting enabled to ensure the differentiation of functions, variables, and so on. For example, the following adds 1 to 1

```
a = 1L + 1L
a
```

Each code segment may contain actual output from R. Such output will appear in grey font prefixed by #>. For example, the output of the above code segment would look like so:

[1] 2

#### 1.5 Rendering Mathematical Formulae

Throughout these notes, there will be mathematical symbols used to express the material. Depending on the version of the book, there are two different rendering engines.

- For the online version, the text uses MathJax to render mathematical notation for the web. In the event the formulae does not load for a specific chapter, first try to refresh the page. 9 times out of 10 the issue is related to the software library not loading quickly. You can also right-click to see the corresponding LaTeX code used to produce the equation.
- For the pdf version, the text is built using the recommended AMS LaTeX symbolic packages. As a result, there
  should be no issue displaying equations. An example of a mathematical rendering capabilities would be given as:

$$a^2 + b^2 = c^2$$

### 1.6 Development

This book is built with **bookdown** and is open source and freely available. This approach encourages contributions, ensures reproducibility and provides access to the material worldwide. The online version of the book is hosted at sahirbhatnagar.com/EPIB607 and kept up-to-date thanks to Travis. The entire source code is available at https://github.com/sahirbhatnagar/EPIB607.

If you notice any errors, we would be grateful if you would let us know by filing an issue here or making a pull request by clicking the edit button in the top-left corner of the text:

The version of the book you are reading now was built on 2018-10-25 and was built on Travis.

#### 1.7 About the authors

Sahir Bhatnagar James Hanley

<sup>&</sup>lt;sup>1</sup>https://raw.githubusercontent.com/coatless/spm/master/index.Rmd

1.8. LICENSE 9



Figure 1.1

- Sahir R. Bhatnagar: Assistant Professor of Biostatistics McGill University, Montreal, Canada.
  - Website: https://sahirbhatnagar.com/
  - Twitter: syfi\_24
  - GitHub: https://github.com/sahirbhatnagar
- James A. Hanley: Professor of Biostatistics McGill University, Montreal, Canada.
  - Webpage: http://www.medicine.mcgill.ca/epidemiology/hanley/

#### 1.8 License

This work is licensed under a Creative Commons Attribution 4.0 International License

10 CHAPTER 1. WELCOME

### **Course Information**

- · Instructor: Sahir Bhatnagar
- · Teaching Assistants:
  - Kody Crowell, kody.crowell@mail.mcgill.ca, Mondays 2-3pm (Ab Gi)
  - Himasara Marasinghe, dewdunee.marasinghe@mail.mcgill.ca, Thursdays 1-2pm (Ha Pa)
  - Guanbo Wang, guanbo.wang@mail.mcgill.ca, Wednesdays 11:30am-12:30pm (PI-Za)
- Website: http://sahirbhatnagar.com/EPIB607/
- Lectures: Monday 11:30am 1:30pm, Thursday 8:30am 10:30am
- Location: McMed 1034
- · Office Hours: TBD
- · Prerequisite(s): Calculus and Algebra
- Texts: The Practice of Statistics in the Life Sciences, 3nd Edition by Baldi & Moore.
- Midterm: October 29, 2018Final: December 4, 2018

### 2.1 Teaching strategy

This course will follow the **Flipped Classroom** model. Here, students are expected to have engaged with the material before coming to class (based on very precise pre-class instructions). The students will then be expected to answer a series of conceptual multiple choice questions using the DALITE online platform (Bhatnagar et al., 2016).

This allows the instructor to delegate the delivery of basic content and definitions to textbooks and videos, and enforces the idea that students cannot be simply passive recipients of information. This approach then allows the professor to focus valuable class time on nurturing efficient discussions surrounding the ideas within the content, guiding interactive exploration of typical misconceptions, and promoting collaborative problem solving with peers.



Figure 2.1

#### 2.2 A focus on computation

Classic introductory statistics textbooks were written during a time when computers were still in their infancy. As such, even the newer editions heavily rely on *by-hand* computations such as looking up tables for tail probabilities. We take a modern approach and introduce computational methods in statistics with the statistical software program R.

#### 2.3 DataCamp

This class is supported by DataCamp, the most intuitive learning platform for data science. Learn R, Python and SQL the way you learn best through a combination of short expert videos and hands-on-the-keyboard exercises. Take over 100+ courses by expert instructors on topics such as importing data, data visualization or machine learning and learn faster through immediate and personalised feedback on every exercise.

You will be asked to complete some of the courses in DataCamp for background reading or for assignments. You can sign up for a free account at this link. Note: you are required to sign up with a <code>@mail.mcgill.ca</code> or <code>@mcgill.ca</code> email address.

#### 2.4 Grade Distribution

40%
15%
15%
10%
20%

# **Target Syllabus**

Abbreviation	Description
JH	James Hanley notes
EM	Erica Moodie notes
OS	Olli Saarela notes
AAO	Against all odds video series
B&M	The practice of statistics in the life sciences by Baldi and Moore, 3rd edition
Freedman dataviz	Statistics by Freedman, Pisani, Purves, Adhikari, 2nd edition Fundamentals of Data Visualization by Claus O. Wilke

### 3.1 Descriptive Statistics

Topic	Video	Readings
Histograms Density Plots Measures of Center Boxplots Standard Deviation	[AAO unit 3](https://www.learner.org/courses/againstallodds/unitpages/unit03.html) –  [AAO unit 4](https://www.learner.org/courses/againstallodds/unitpages/unit04.html) [AAO unit 5](https://www.learner.org/courses/againstallodds/unitpages/unit05.html) [AAO unit 6](https://www.learner.org/courses/againstallodds/unitpages/unit06.html)	[AAO unit 3, pages 1-6](ht [dataviz chapter 7](https:/ [AAO unit 4, pages 1-6](ht [AAO unit 5, pages 1-5](ht [AAO unit 6, pages 1-3](ht
Data Visualization	[Hans Rosling BBC](https://www.youtube.com/watch?v=jbkSRLYSojo)	[JH notes on Descriptives

### 3.2 Sampling Distributions

Topic	Video	Readings
Parameters and Statistics Sampling Distributions Central Limit Theorem The Bootstrap	- [AAO unit 22](https://www.learner.org/courses/againstallodds/unitpages/unit22.html) [AAO unit 22](https://www.learner.org/courses/againstallodds/unitpages/unit22.html)	[[JH section 1]](htt [[AAO unit 22, pag [B&M pages 321-3: [[Computer-Intensi

#### 3.3 Introduction to Inference

Topic	Video	Readings
Confidence Intervals Tests of Significance and P-values	[AAO unit 24](https://www.learner.org/courses/againstallodds/unitpages/unit24.html) [AAO unit 25](https://www.learner.org/courses/againstallodds/unitpages/unit25.html)	[[AAO unit [[AAO unit

### 3.4 One-sample Inference

Topic	Video	Readings
Means Proportions Rates	[AAO unit 26](https://www.learner.org/courses/againstallodds/unitpages/unit26.html) [AAO unit 28](https://www.learner.org/courses/againstallodds/unitpages/unit28.html) -	[[AAO unit 26, pages 1-11]](https: [[AAO unit 28, pages 1-11]](https: –

### 3.5 Two-sample Inference

Topic	Video	Readings
Means Proportions, Fisher's Exact	[AAO unit 27](https://www.learner.org/courses/againstallodds/unitpages/unit27.html) –	[[AAO unit 27, pag [[B&M chapter 20]
Rates	-	

## 3.6 Regression

Topic	Video	Readings
Linear Regression Logistic, Poisson Regression	[AAO unit 30](https://www.learner.org/courses/againstallodds/unitpages/unit30.html) –	[[AAO unit 30, p [[OS notes]](htt

### 3.7 Nonparametric Statistics

Topic	Video	Readings	Exe
Wilcoxon Signed Rank Test Kruskal-Wallis Test	-	[[JH notes]](http://www.medicine.mcgill.ca/epidemiology/hanley/c607/ch14/jh_ch_14.pdf) [[EM notes]](https://www.dropbox.com/s/hotrocov75sm7q8/InfStatPart5.pdf?dl=0)	-

## **Prerequisites**

#### 4.1 Git

You need to first install the git version control system. Follow Chapter 1: Installing Git for step-by-step installation instructions with screenshots.

#### 4.2 R and RStudio

Complete the following DataCamp courses:

Topic	DataCamp Courses
Working with the RStudio IDE (Part 1) This short course will guide you through installing both R and RStudio. RStudio is a software application that facilitates how you interact with R. Introduction to R In this course you will get a hands-on introduction to the basic commands in R. With the knowledge gained in this course, you will be ready to perform a data analysis. Reporting with R Markdown You will learn how to create reproducible reports using R and Markdown. All assignments for this course must be submitted in this format. Version Control with RStudio IDE (Chapter 2 only) You will learn how to use RStudio to version control	DataCallip Courses
your code. All assignments for this course must be submitted to a GitHub repository.	

### **Schedule**

#### 5.1 Week 1

#### 5.1.1 Thursday September 6

- [1. Introduction to EPIB607](https://docs.google.com/presentation/d/15c0YIS2KJXFzTKgFfQ\_xDjTAcvPyQb8JhSLGvsEHJ6o/edit?usp=sh
- [2. Course Website](https://sahirbhatnagar.com/EPIB607/)
- [3. Teaching Philosophy](https://sahirbhatnagar.com/EPIB607/course-information.html#teaching-strategy)
- [4. Video: What is Statistics?](https://www.learner.org/courses/againstallodds/unitpages/unit01.html)
- [5. Introduction to DALITE](https://mydalite.org/en/live/signup/form/NTc4)
- [6. Review of A1 and DALITE Q1](https://sahirbhatnagar.com/EPIB607/assignments.html)
- [7. Live Poll](http://etc.ch/tfZA)
- [8. Terms and Concepts group exercise](https://sahirbhatnagar.com/EPIB607/terms-and-concepts.html)

#### 5.2 Week 2

#### 5.2.1 Monday September 10

- [1. McGill VPN](http://kb.mcgill.ca/kb/?ArticleId=1212&source=article&c=12&cid=2#tab:homeTab:crumb:8:artId:1212:src:article)
- [2.1 Data graphics Slides](https://docs.google.com/presentation/d/1wXgcTzcRKI\_leGRfNZjWWPkjwJSTIZSXBCI-fFuLEaE/edit?usp=sharin [2.2 Data graphics exercise](https://sahirbhatnagar.com/EPIB607/data-graphics.html)

#### 5.2.2 Wednesday September 12

[1. DALITE Q1 - Histograms, Medians and Means due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/001\_hist\_n

18 CHAPTER 5. SCHEDULE

#### 5.2.3 Thursday September 13

- [1. Data graphics exercise 2 presentation](http://www.vox.com/a/explain-food-america)
- [2. Hurricane Florence graphic](https://twitter.com/EricHolthaus/status/1040007537234530304)
- [3. Review DALITE Q1 Solutions](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/001\_hist\_mean/001-hist-mean-sol.pdf)
- [4. Introduction to the 'mosaic' and 'ggformula' package](https://cran.r-project.org/package=mosaic)
- [5. R Markdown Presentation](https://prezi.com/dvmgx17e\_was/reproducible/?utm\_campaign=share&utm\_medium=copy)

```
# the pacman package makes it easy to load and install packages
install.packages("pacman")

# pacman will install and load the library
pacman::p_load(mosaic, learnr)

# this will launch the intro tutorial in your web browser
learnr::run_tutorial("introduction", package = "ggformula")

# this will launch the refining tutorial in your web browser
learnr::run_tutorial("refining", package = "ggformula")
```

#### 5.3 Week 3

#### 5.3.1 Monday September 17

- [1. Sampling Distributions](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sampling\_dist/EPIB607\_sampling\_dist.pdf)
- 2. Exercise 1: How deep is the ocean? (https://github.com/sahirbhatnagar/EPIB607/raw/master/exercises/water/students/260194225\_
- 3. Assignment 2 questions

#### 5.3.2 Wednesday September 19

[1. DALITE Q2 - due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/002\_box\_sd\_curves/002-box-sd-curves.pdf)
[2. DALITE Q3 - due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/003\_parameters\_samplingdist\_CLT/003-p

#### 5.3.3 Thursday September 20

[Assignment 1 - Setting up the computing environment due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignmen 1. DALITE Q2 and Q3 review

[2. Normal curves, CLT, Confidence Intervals](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sampling\_dist/EPIB607\_sa

#### 5.3.4 Friday September 21

Assignment 2 - Histograms, Medians, Means, Boxplots and Standard Deviation due by 11:59pm

5.4. WEEK 4 19

#### 5.4 Week 4

#### 5.4.1 Monday September 24

[1. Live Poll](http://etc.ch/tfZA)

[2. Normal curves, CLT, Confidence Intervals](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sampling\_dist/EPIB607\_sa

#### 5.4.2 Wednesday September 26

[1. DALITE Q4 - due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/004\_normal\_ci/004-normal-ci.pdf)

#### 5.4.3 Thursday September 27

- [1. Review DALITE Q4 Solutions](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/004\_normal\_ci/004-normal-ci-sol.pdf)
- [2. Normal curves, CLT, Confidence Intervals](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sampling\_dist/EPIB607\_sa
- [3. Bootstrap Confidence Intervals](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/bootstrap/EPIB607\_bootstrap.pdf)
- [4. Bootstrap article in Scientific American](https://www.dropbox.com/s/cxiq70zxxtyxlb5/EfronDiaconisBootstrap.pdf?dl=0)

#### 5.4.3.1 Code for Bootstrap Confidence Interval

```
# function for sampling ocean depths
source("https://github.com/sahirbhatnagar/EPIB607/raw/master/exercises/water/automate water task.R")
# from the in-class exercise
index.n.20 <- c(2106,2107,2108,2109,2110,2111,2112,
                2113,2114,2115,2116,2117,2118,2119,
                2120,2121,2122,2123,2124,2125)
# get depths of ocean sample n=20
depths.n.20 <- automate_water_task(index = index.n.20,</pre>
                                    student_id = 260194225, type = "depth")
# change to 100m units
depths.n.20$alt = round(depths.n.20$alt/100,0)
library(mosaic)
# calculate mean depth for your sample
mean_depth <- mean(~ alt, data = depths.n.20)</pre>
# 10000 bootstrap samples
s_dist <- do(10000) * mean( ~ alt, data = resample(depths.n.20))</pre>
# 95% CI
CI_95 \leftarrow quantile(\sim mean, data = s_dist, probs = c(0.025, 0.975))
```

20 CHAPTER 5. SCHEDULE

```
# plot sampling distribution
hist(s_dist$mean, breaks = 50, col = "#56B4E9",
     main="",
     xlab = "mean depth of the ocean (100m) from each bootstrap sample")
# draw red line at the sample mean
abline(v = mean_depth, lty =1, col = "red", lwd = 4)
# draw black dotted lines at 95% CI
abline(v = CI_95[1], lty = 2, col = "black", lwd = 4)
abline(v = CI_95[2], lty =2, col = "black", lwd = 4)
# include legend
library(latex2exp)
legend("topleft",
       legend = c(TeX("\$\backslash \{y\} = 36\$"),
                  sprintf("95%% CI: [%.f, %.f]",CI_95[1], CI_95[2])),
       lty = c(1,1),
       col = c("red","black"), lwd = 4)
```

#### 5.4.4 Friday September 28

Assignment 3 due by 11:59pm

#### 5.5 Week 5

#### 5.5.1 Monday October 1

Provincial Elections - No Class

#### 5.5.2 Wednesday October 3

[1. DALITE Q5 - due by 5pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/005\_hypothesis\_t/005-hypothesis-t.pdf)

#### 5.5.3 Thursday October 4

- [1. Live Poll](http://etc.ch/tfZA)
- [2. DALITE Q5](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/005\_hypothesis\_t/005-hypothesis-t-sol.pdf)
- [3. Bootstrap Confidence Intervals](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/bootstrap/EPIB607\_bootstrap.pdf)
- [4. Bootstrap article in Scientific American](https://www.dropbox.com/s/cxiq70zxxtyxlb5/EfronDiaconisBootstrap.pdf?dl=0)
- [5. Overview Grid](https://www.dropbox.com/s/t7a1bnxdid9y6i3/OverviewGrid.pdf?dl=0)
- [6. Inference about a population mean (\$\mu\$)](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one\_sample\_mean/EPIB

5.6. WEEK 6 21

#### 5.5.4 Friday October 5

[A4 due by 11:59pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignments/a4/a4\_clt\_ci.pdf)

#### 5.6 Week 6

#### 5.6.1 Monday October 8

Thanksgiving. No class.

#### 5.6.2 Thursday October 11

- [1. Inference about a population mean (\$\mu\$)](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one\_sample\_mean/EPIB
- 2. [P-values, Power and Sample Size](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sample\_size/EPIB607\_sample\_size/

#### 5.6.3 Sunday October 14

Assignment 5 due by 11:59pm

#### 5.7 Week 7

#### 5.7.1 Monday October 15

- 1. [Epi Seminar (4-5 pm): Banning P-value use, or Misuse?](https://www.mcgill.ca/epi-biostat-occh/files/epi-biostat-occh/shernandez-dia
- 2. [P-values, Power and Sample Size](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sample\_size/EPIB607\_sample\_siz

#### 5.7.1.1 Code for distribution plots under the null and alternative

```
source("https://raw.githubusercontent.com/sahirbhatnagar/EPIB607/master/assignments/a6/plot_null_alt.R"
mu0 <- -0.540 # mean under the null
mha <- 0.99*-0.540 # mean under the alternative
s <- 0.0080 # sample/population SD
n <- 5 # sample size
cutoff <- mu0 + qnorm(0.95) * s / sqrt(n)

#' Plot null and alternative distributions
#' @param n sample size
#' @param s population standard deviation (or estimated standard deviation)
#' @param mu0 mean under the null hypothesis
#' @param mha mean under the alternative hypothesis
#' @param alternative is alternative hypothesis greater than or less than mu0.</pre>
```

22 CHAPTER 5. SCHEDULE

#### 5.7.1.2 Code for looking at power as a function of sample size and noise

#### 5.7.2 Wednesday October 17

[1. DALITE Q6 due by 5 pm](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/006\_proportions/006-proportions.pdf)

#### 5.7.3 Thursday October 18

- [1. DALITE Q6 Solutions](https://github.com/sahirbhatnagar/EPIB607/raw/master/dalite/006\_proportions/006-proportions-sol.pdf)
- 2. [P-values, Power and Sample Size](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/sample\_size/EPIB607\_sample\_siz
- 3. [Inference about a population proportion](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one\_sample\_prop/EPIB607

5.8. WEEK 8 23

#### 5.7.3.1 Code for Clopper-Pearson Confidence Intervals

```
# upper limit --> lower tail needs 2.5%
manipulate::manipulate(
mosaic::xpbinom(4, size = 5, prob = proba),
proba = manipulate::slider(0.001, 0.999, step = 0.001))
# lower limit --> upper tail needs 2.5%
# when lower.tail=FALSE, pbinom doesnt include k, i.e., P(Y > k)
manipulate::manipulate(
mosaic::xpbinom(3, size = 5, prob = proba, lower.tail = FALSE),
proba = manipulate::slider(0.001, 0.999, step = 0.001))
# upper limit --> lower tail needs 2.5%
manipulate::manipulate(
mosaic::xpbinom(16, size = 20, prob = proba),
proba = manipulate::slider(0.001, 0.999, step = 0.001))
# lower limit --> upper tail needs 2.5%
manipulate::manipulate(
mosaic::xpbinom(15, size = 20, prob = proba, lower.tail = FALSE),
proba = manipulate::slider(0.001, 0.999, step = 0.001))
```

#### 5.8 Week 8

#### 5.8.1 Monday October 22

- 1. [Inference about a population proportion](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one\_sample\_prop/EPIB607
- 2. [Inference about a population rate](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one\_sample\_rate/EPIB607\_one\_sa

#### 5.8.1.1 Code for Poisson Confidence Intervals

```
# upper limit --> lower tail needs 2.5%
manipulate::manipulate(
mosaic::xppois(6, lambda = LAMBDA),
LAMBDA = manipulate::slider(0.01, 20, step = 0.01))

# lower limit --> upper tail needs 2.5%
# when lower.tail=FALSE, ppois doesnt include k, i.e., P(Y > k)
manipulate::manipulate(
mosaic::xppois(5, lambda = LAMBDA, lower.tail = FALSE),
LAMBDA = manipulate::slider(0.01, 20, step = 0.01))
```

24 CHAPTER 5. SCHEDULE

Assignment 8 due by 11:59pm

### 5.8.2 Thursday October 25

1. Fina 2. [Infe	<ol> <li>Final exam date: December 6th, Otto MAASS 112 (cap 220) available from 9am-6pm</li> <li>[Inference about a population rate](https://github.com/sahirbhatnagar/EPIB607/raw/master/slides/one_sample_rate/EPIB607_one_sa</li> </ol>				
5.8.3	Friday October 26				
		Assignment 6 due by 59pm			
5.9	Week 9				
5.9.1	Monday October 29				
		Midterm			
5.9.2	Thursday November 1				
5.9.3	Friday November 2				
		Assignment 7 due by 11:59pm			
5.10	Week 10				
5.10.1	Monday November 5				
5.10.2	Thursday November 8				
5 10 Q	Friday November 0				

5.11. WEEK 11 25

5.11	Week 11	
5.11.1	Monday November 12	
		_
5.11.2	Thursday November 15	
		_
5.11.3	Friday November 16	
		Assignment 9 due by 11:59pm
5 12	Week 12	
J. 12	WEER 12	
5.12.1	Monday November 19	
		_
		<del></del>
5.12.2	Thursday November 22	
		_
5.12.3	Friday November 23	
011_10	<b>,</b>	
		Assignment 10 due by 11:59pm
5.13	Week 13	
5.13.1	Monday November 26	
		_
		_
5.13.2	Thursday November 29	
		_

26 CHAPTER 5. SCHEDULE

#### 5.14 Week 14

5.14.1 Monday December 3

5.14.2 Tuesday December 4

Final Exam (Tentative).

5.14.3 Friday December 7

Group project due by 11:59pm.

## **Slides**

- 1. Introduction to EPIB 607
- 2. Data Graphics
- 3. Sampling Distributions
- 4. Bootstrap Confidence Intervals
- 5. Inference about a population mean
- 6. P-values, Power and Sample Size
- 7. Inference about a population proportion
- 8. Inference about a population rate

28 CHAPTER 6. SLIDES

## **Polls**

- Day 1
   Graphics, CLT
   Sampling Distributions, CI

30 CHAPTER 7. POLLS

# **Assignments**

Assignment	Topic
1	[Setting up the computing environment](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignments/a1/a1-setu
2	[Histograms, Means, Medians, Boxplots, Standard Deviation](https://github.com/sahirbhatnagar/EPIB607/raw/master/ass
3	[Sampling Distributions](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignments/a3/a3-sampling-dist.pdf)
4	[CLT, Confidence Intervals and Bootstrap](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignments/a4/a4_c
5	[Inference for one sample mean](https://github.com/sahirbhatnagar/EPIB607/raw/master/assignments/a5/a5_ttest.pdf)
6	[Power, Sample Size and Inference for a Population Proportion](https://github.com/sahirbhatnagar/EPIB607/raw/master/
7	One-Sample Inference
8	Two-Sample Inference
9	Regression
10	Nonparametric Statistics

32 CHAPTER 8. ASSIGNMENTS

## **DALITE**

- 1. Q1 (due September 12, 2018) Solutions
- Q2 (due September 19, 2018) Solutions
   Q3 (due September 19, 2018) Solutions
- 4. Q4 (due September 26, 2018) Solutions
- 5. Q5 (due October 3, 2018) Solutions
- 6. Q6 (due October 17, 2018)

CHAPTER 9. DALITE

## **Terms and Concepts**

In groups of approximately 10, pick an article from the list below and fill out this Google Spreadsheet

The first sheet contains an example based on this article: The efficacy of calorie labelling formats on pre-packaged foods: An experimental study among adolescents and young adults in Canada

- 1. Blood Lead Levels of Children in Flint, Michigan: 2006-2016
- 2. Brief Standing Desk Intervention to Reduce Sedentary Behavior at a Physical Activity Conference in 2016
- 3. Lunch is ready ... but not healthy: An analysis of lunches served in childcare centres in two Canadian provinces
- 4. Fluoride exposure and reported learning disability diagnosis among Canadian children: Implications for community water fluoridation
- 5. Folate Nutrition Status in Mothers of the Boston Birth Cohort, Sample of a US Urban Low-Income Population
- 6. State Indoor Tanning Laws and Prevalence of Indoor Tanning Among US High School Students, 2009–2015
- 7. Outdoor time, physical activity and sedentary time among young children: The 2012–2013 Canadian Health Measures Survey
- 8. Physicochemical properties and phenolic content of honey from different floral origins and from rural versus urban landscapes
- 9. A family-centered lifestyle intervention for obese six- to eight-year-old children: Results from a one-year randomized controlled trial conducted in Montreal, Canada

Part II

Part I

# **Chapter 11**

# **Data Graphics**

Data graphics can be understood in terms of five basic elements (Baumer et al., 2017):

- 1. Aesthetics or visual cues
- 2. Coordinate system
- 3. Scales
- 4. Context
- 5. Facets and layers

## 11.1 Aesthetics or Visual cues

Aesthetics or visual cues are graphical elements that draw the eye to what you want your audience to focus upon. They are the fundamental building blocks of data graphics, and the choice of which visual cues to use to represent which quantities is the central question for the data graphic composer. Nathan Yau identifies nine distinct visual cues, for which we also list whether that cue is used to encode a numerical or categorical quantity:


- 1. Position (numerical): where in relation to other things?
- 2. Length (numerical): how big (in one dimension)?
- 3. Angle (numerical): how wide? parallel to something else?
- 4. Direction (numerical) at what slope? In a time series, going up or down?
- 5. Shape (categorical) belonging to which group?
- 6. Area (numerical) how big (in two dimensions)?
- 7. Volume (numerical) how big (in three dimensions)?
- 8. Shade (either) to what extent? how severely?
- 9. Color (either) to what extent? how severely? Beware of red/green color blindness

# 11.2 Coordinate systems

How are the data points organized? While any number of coordinate systems are possible, three are most common.

#### 11.2.1 Cartesian

This is the familiar (x, y)-rectangular coordinate system with two perpendicular axes.

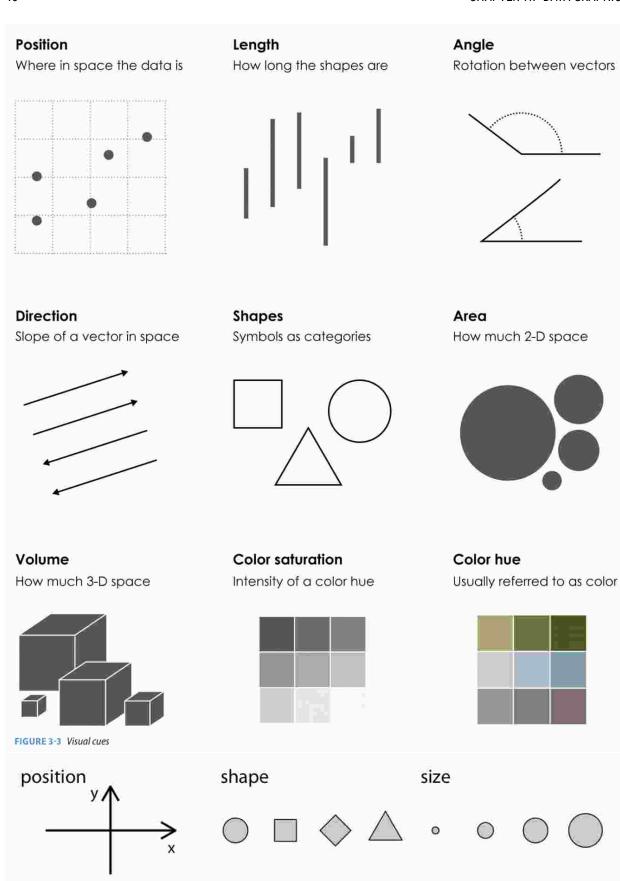



11.3. SCALES 41

#### 11.2.2 Polar

The radial analog of the Cartesian system with points identified by their radius  $\rho$  and angle  $\theta$ .

### 11.2.3 Geographic

This is the increasingly important system in which we have locations on the curved surface of the Earth, but we are trying to represent these locations in a flat two-dimensional plane.

#### 11.3 Scales

Scales link data values to aesthetics (Wilke, 2018). To map data values onto aesthetics, we need to specify which data values correspond to which specific aesthetics values. For example, if our graphic has an x axis, then we need to specify which data values fall onto particular positions along this axis. Similarly, we may need to specify which data values are represented by particular shapes or colors. This mapping between data values and aesthetics values is created via scales. A scale defines a unique mapping between data and aesthetics. Importantly, a scale must be one-to-one, such that for each specific data value there is exactly one aesthetics value and vice versa. If a scale isn't one-to-one, then the data visualization becomes ambiguous.

### 11.4 Context

The purpose of data graphics is to help the viewer make meaningful comparisons, but a bad data graphic can do just the opposite: It can instead focus the viewer's attention on meaningless artifacts, or ignore crucial pieces of relevant but external knowledge. Context can be added to data graphics in the form of titles or subtitles that explain what is being shown, axis labels that make it clear how units and scale are depicted, or reference points or lines that contribute relevant external information. While one should avoid cluttering up a data graphic with excessive annotations, it is necessary to provide proper context (Baumer et al., 2017).

# 11.5 Facets and layers

One of the fundamental challenges of creating data graphics is condensing multivariate information into a two-dimensional image. While three-dimensional images are occasionally useful, they are often more confusing than anything else. Instead, here are three common ways of incorporating more variables into a two-dimensional data graphic.

#### 11.5.1 Facets

A single data graphic can be composed of several small multiples of the same basic plot, with one (discrete) variable changing in each of the small sub-images. An example of facets is shown in Figure 11.4

```
pacman::p_load(mosaic)
gf_boxplot(avg_drinks ~ racegrp | sex, data = HELPrct)
```

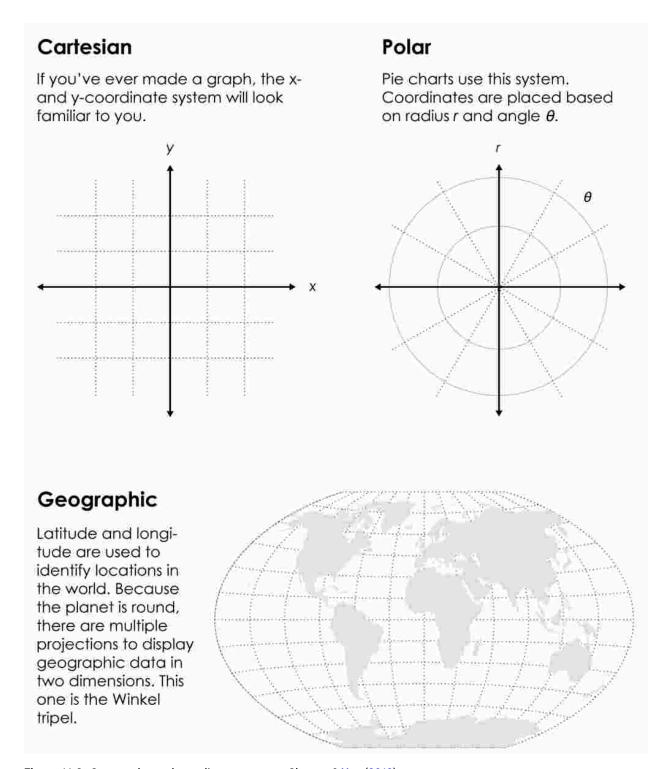


Figure 11.2: Commonly used coordinate systems. Chapter 3 Yau (2013).

11.6. COLOR 43



**Figure 11.3:** Scales link data values to aesthetics. Here, the numbers 1 through 4 have been mapped onto a position scale, a shape scale, and a color scale. For each scale, each number corresponds to a unique position, shape, or color and vice versa (Wilke, 2018).

### 11.5.2 **Layers**

It is sometimes appropriate to draw a new layer on top of an existing data graphic. This new layer can provide context or comparison, but there is a limit to how many layers humans can reliably parse.

#### 11.5.3 Animation

If time is the additional variable, then an animation can sometimes effectively convey changes in that variable. Of course, this doesn't work on the printed page, and makes it impossible for the user to see all the data at once.

#### **11.6** Color

Approximately 8 percent of the population—most of whom are men—have some form of color blindness. Most commonly, this renders them incapable of seeing colors accurately, most notably of distinguishing between red and green. Compounding the problem, many of these people do not know that they are color-blind. Thus, for professional graphics it is worth thinking carefully about which colors to use.

Thankfully, we have been freed from the burden of having to create such intelligent palettes by the research of Cynthia Brewer, creator of the ColorBrewer website (and R package). Brewer has created colorblind-safe palettes in a variety of hues for three different types of numeric data in a single variable:

#### 11.6.1 Sequential

The ordering of the data has only one direction. Positive integers are sequential because they can only go up: they can't go past 0. (Thus, if 0 is encoded as white, then any darker shade of gray indicates a larger number.)

#### 11.6.2 Diverging

The ordering of the data has two directions. In an election forecast, we com-monly see states colored based on how they are expected to vote for the president. Since red is associated with Republicans and blue with Democrats, states that

CHAPTER 11. DATA GRAPHICS



**Figure 11.4:** The HELP study was a clinical trial for adult inpatients recruited from a detoxification unit. Patients with no primary care physician were randomized to receive a multidisciplinary assessment and a brief motivational intervention or usual care, with the goal of linking them to primary medical care.


11.6. COLOR 45

are solidly red or blue are on opposite ends of the scale. But "swing states" that could go either way may appear purple, white, or some other neutral color that is "between" red and blue.

## 11.6.3 Qualitative

There is no ordering of the data, and we simply need color to differentiate different categories.

```
pacman::p_load(RColorBrewer)
RColorBrewer::display.brewer.all()
```

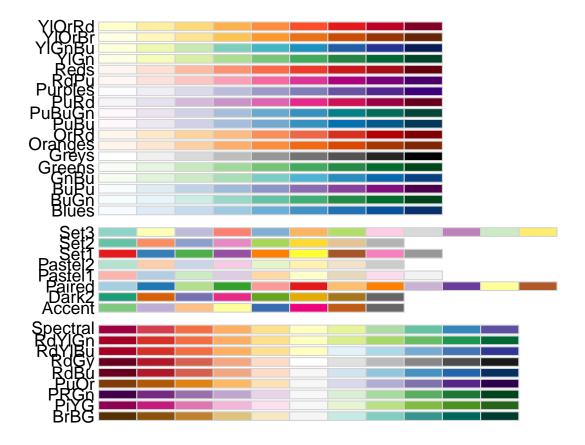

# 11.7 Examples

#### 11.7.1 Hurricane Florence

For Hurricane Florence, Reed et al. (2018) present the first advance forecasted attribution statements about the human influence on a tropical cyclone. In Figure 11.5 they present a side-by-side comparison of the rainfall based on two forecasts:

- 1. **Standard Forecast**: With observed initial atmospheric conditions and sea surface temperatures (SST) adapted from NOAA's operational Global Forecast System model. This is the forecast of the actual Hurricane Florence.
- 2. **Modified Forecast**: With observed initial conditions modified to remove the estimated climate change signal from the temperature, moisture, and SST fields to represent a world without climate change. This is a counterfactual forecast of Hurricane Florence if it were to occur in a world without human induced global warming.

The image on the right (modified forecast) looks worse, but the situation described on the left (standard forecast) is actually worse. They should have instead used perceptually uniform sequential colormaps as shown in Figure 11.6

These palettes are available in R through the viridis R package.

#### 11.7.2 SAT Scores

The bar graph below displays the average score on the math portion of the 2010 SAT (with possible scores ranging from 200 to 800) among states for whom at least two-thirds of the students took the SAT.

```
pacman::p_load(mdsr)
pacman::p_load(mosaic)
gf_colh(state ~ math, data = subset(SAT_2010, sat_pct > 66))
```

11.7. EXAMPLES 47



**Figure 11.5:** Left: is the forecast of the actual Hurricane Florence. Right: counterfactual forecast of Hurricane Florence if it were to occur in a world without human induced global warming (Reed et al., 2018).



Figure 11.6: source: https://matplotlib.org/users/colormaps.html




11.7. EXAMPLES 49

This plot uses the visual cue of position to represent the math SAT score on the vertical axis with. The categorical variable of state is arrayed on the horizontal axis. It would not be appropriate to consider the state variable to be ordinal, since the ordering is not meaningful in the context of math SAT scores. The coordinate system is Cartesian, although as noted previously, the horizontal coordinate is meaningless. Context is provided by the axis labels and title.

### 11.7.3 Swimming records

Next, we consider a time series that shows the progression of the world record times in the 100-meter freestyle swimming event for men and women. The Figure below displays the times as a function of the year in which the new record was set. At some level this is simply a scatterplot that uses position on both the vertical and horizontal axes to indicate swimming time and chronological time, respectively, in a Cartesian plane. The numeric scale on the vertical axis is linear, in units of seconds, while the scale on the horizontal axis is also linear, measured in years. But there is more going on here. Color is being used as a visual cue to distinguish the categorical variable sex. Furthermore, since the points are connected by lines, direction is being used to indicate the progression of the record times. (In this case, the records can only get faster, so the direction is always down.) One might even argue that angle is being used to compare the descent of the world records across time and/or gender. In fact, in this case shape is also being used to distinguish sex.

```
pacman::p_load(mosaicData)
gf_point(time ~ year , data = SwimRecords, color = ~ sex, shape = ~ sex, size = 3) %>%
gf_line(time ~ year , data = SwimRecords, color = ~ sex)
```

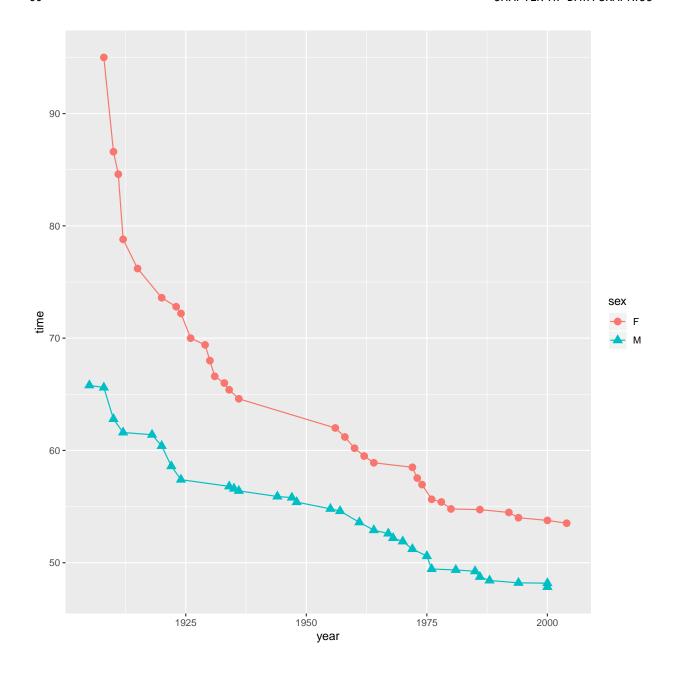

# 11.8 Exercises

## 11.8.1 Exercise 1

For this exercise, refer to the article assigned to your team in the Terms and Concepts exercise.

- 1. Identify the aesthetics and scale(s). If your article did not contain a graphic, pick a Table in your paper and think about what graphic could have been used instead. See Fundamentals of Data Visualization and Top 50 ggplot2 Visualizations for examples of graphics.
- 2. How many variables are depicted in the graphic? Explicitly link each variable to an aesthetic that you listed above.
- 3. Critique this data graphic using the taxonomy described in this chapter.

11.8. EXERCISES 51

# 11.8.2 Exercise 2

Vox published a list of Charts that explain food in America. There are 40 maps, charts, and graphs that show where our food and drink comes from and how we eat it.

Pick your best and least favorite graphic. One representative from each group will present in 1 minute or less their rationale for the groups choices.

# **Appendix A**

# Vectorization, \*apply and for loops

This section will cover the basics of vectorizations, the \*apply family of functions and for loops.

## A.1 Vectorization

Almost everything in R is a vector. A scalar is really a vector of length 1 and a data.frame is a collection of vectors. An nice feature of R is its vectorized capabilities. Vectorization indicates that a function operates on a whole vector of values at the same time and not just on a single value<sup>1</sup>. If you have have ever taken a basic linear algebra course, this concept will be familiar to you.

Take for example two vectors:

$$\begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} + \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} = \begin{bmatrix} 2 \\ 4 \\ 6 \end{bmatrix}$$

The corresponding  $\mathbb{R}$  code is given by:

```
a <- c(1,2,3)
b <- c(1,2,3)
a+b
#> [1] 2 4 6
```

Many of the base functions in R are already vectorized. Here are some common examples:

```
# generate a sequence of numbers from 1 to 10
(a <- 1:10)

#> [1] 1 2 3 4 5 6 7 8 9 10

# sum the numbers from 1 to 10
sum(a)
#> [1] 55
```

<sup>1</sup>http://www.dummies.com/how-to/content/how-to-vectorize-your-functions-in-r.html

```
# calculate sums of each column
colSums(iris[, -5])
#> Sepal.Length Sepal.Width Petal.Length Petal.Width
#> 876.5 458.6 563.7 179.9
```

**Exercise**: What happens when you sum two vectors of different lengths?

# A.2 Family of \*apply functions

- apply, lapply and sapply are some of the most commonly used class of functions in R
- \*apply functions are not necessarily faster than loops, but can be easier to read (and vice cersa)
- apply is used when you need to perform an operation on every row or column of a matrix or data.frame
- lapply and sapply differ in the format of the output. The former returns a list while the ladder returns a vector
- There are other \*apply functions such as tapply, vapply and mapply with similar functionality and purpose

# A.2.1 Loops vs. Apply

```
# Getting the row means of two columns
# Generate data
N <- 10000
x1 \leftarrow runif(N)
x2 <- runif(N)
d <- as.data.frame(cbind(x1, x2))</pre>
head(d)
#>
          x1
#> 1 0.57632 0.9615
#> 2 0.56474 0.1950
#> 3 0.07399 0.3001
#> 4 0.45387 0.3823
#> 5 0.37328 0.1197
#> 6 0.33132 0.9891
# Loop:
# create a vector to store the results in
rowMeanFor <- vector("double", N)</pre>
for (i in seq_len(N)) {
        rowMeanFor[[i]] <- mean(c(d[i, 1], d[i, 2]))
}
# Apply:
rowMeanApply <- apply(d, 1, mean)</pre>
# are the results equal
all.equal(rowMeanFor,rowMeanApply)
#> [1] TRUE
```

### A.2.2 Descriptive Statistics using \*apply

```
data(women)
# data structure
str(women)
#> 'data.frame': 15 obs. of 2 variables:
#> $ height: num 58 59 60 61 62 63 64 65 66 67 ...
#> $ weight: num 115 117 120 123 126 129 132 135 139 142 ...
# calculate the mean for each column
apply(women, 2, mean)
#> height weight
#> 65.0 136.7
# apply 'fivenum' function to each column
vapply(women, fivenum, c("Min." = 0, "1st Qu." = 0, "Median" = 0,
                        "3rd Qu." = 0, "Max." = 0)
#>
         height weight
#> Min. 58.0 115.0
#> 1st Qu. 61.5 124.5
#> Median 65.0 135.0
#> 3rd Qu. 68.5 148.0
#> Max. 72.0 164.0
```

# A.2.3 Creating new columns using sapply

You can apply a *user defined function* to columns or the entire data frame:

## A.2.4 Applying functions to subsets using tapply

```
# Fisher's famous dataset
data(iris)
```

```
str(iris)
#> 'data.frame': 150 obs. of 5 variables:
#> $ Sepal.Length: num 5.1 4.9 4.7 4.6 5 5.4 4.6 5 4.4 4.9 ...
#> $ Sepal.Width : num 3.5 3 3.2 3.1 3.6 3.9 3.4 3.4 2.9 3.1 ...
#> $ Petal.Length: num 1.4 1.4 1.3 1.5 1.4 1.7 1.4 1.5 1.4 1.5 ...
#> $ Petal.Width : num 0.2 0.2 0.2 0.2 0.4 0.3 0.2 0.2 0.1 ...
#> $ Species : Factor w/ 3 levels "setosa", "versicolor", ..: 1 1 1 1 1 1 1 1 1 1 1 1 1 1 ...
# mean sepal length by species
tapply(iris$Sepal.Length, iris$Species, mean)
#> setosa versicolor virginica
#> 5.006 5.936 6.588
```

## A.2.5 Nested for loops using mapply

mapply is my favorite base R function and here are some reasons why:

- Using mapply is equivalent to writing nested for loops except that it is 100% more human readable and less prone
  to errors
- · It is an effective way of conducting simulations because it iterates of many arguments

Let's say you want to generate random samples from a normal distribution with varying means and standard deviations. Of course the brute force way would be to write out the command once, copy paste as many times as you want, and then manually change the arguments for mean and sd in the rnorm function as so:

```
v1 <- rnorm(100, mean = 5, sd = 1)
v2 <- rnorm(100, mean = 10, sd = 5)
v3 <- rnorm(100, mean = -3, sd = 10)
```

This isn't too bad for three vectors. But what if you want to generate many more combinations of means and sds? Furthermore, how can you keep track of the parameters you used? Now lets consider the mapply function:

The following diagram (from r4ds) describes exactly what is going on in the above function call to mapply:

#### Advantages:

Result is automatically stored in a matrix

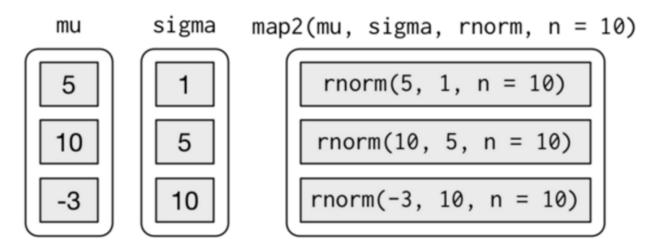


Figure A.1

2. The parameters are also saved in R objects so that they can be easily manipulated and/or recovered

Consider a more complex scenario where you want to consider many possible combinations of means and sds. We take advantage of the expand.grid function to create a data.frame of simulation parameters:

# A.3 Creating dynamic documents with mapply

mapply together with the rmarkdown package (Allaire et al., 2018) can be very useful to create dynamic documents for exploratory analysis. We illustrate this using the Motor Trend Car Road Tests data which comes pre-loaded in R.

The data was extracted from the 1974 Motor Trend US magazine, and comprises fuel consumption and 10 aspects of automobile design and performance for 32 automobiles (1973–74 models).

Copy the code below in a file called  ${\tt mapplyRmarkdown.Rmd}$ :

Copy the code below in a file called boxplotTemplate:

# **Bibliography**

- Allaire, J., Xie, Y., McPherson, J., Luraschi, J., Ushey, K., Atkins, A., Wickham, H., Cheng, J., and Chang, W. (2018). *rmark-down: Dynamic Documents for R.* R package version 1.10.
- Baumer, B. S., Kaplan, D. T., and Horton, N. J. (2017). *Modern Data Science with R*. Chapman and Hall/CRC Press: Boca Raton.
- Bhatnagar, S., Lasry, N., Desmarais, M., and Charles, E. (2016). Dalite: Asynchronous peer instruction for moocs. In *European Conference on Technology Enhanced Learning*, pages 505–508. Springer.
- Reed, K. A., Stansfield, A. M., Wehner, M. F., Berkeley, L., and Zarzycki, C. M. (2018). The human influence on hurricane florence.
- Wilke, C. O. (2018). Fundamentals of Data Visualization.
- Yau, N. (2013). Data Points: Visualization That Means Something. Wiley Publishing, 1st edition.