


Customized Agent

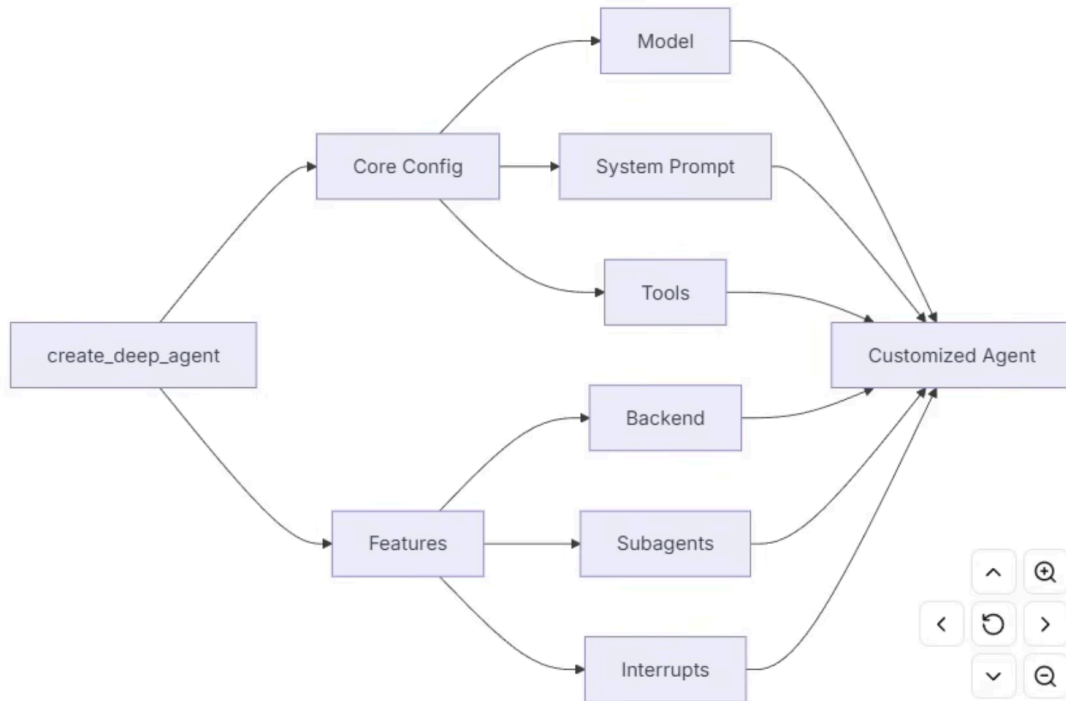

```
from deepagents import create_deep_agent
```

```
agent = create_deep_agent(  
    model="anthropic:claude-sonnet-4-6",  
    system_prompt="You are a helpful assistant.",  
    tools=[search, fetch_url],  
    memory=["./AGENTS.md"],  
    skills=["./skills/"],  
)
```

```
create_deep_agent(  
    model: str | BaseChatModel | None = None,  
    tools: Sequence[BaseTool | Callable | dict[str, Any]] | None = None,  
    *,  
    system_prompt: str | SystemMessage | None = None,  
    middleware: Sequence[AgentMiddleware] = (),  
    subagents: Sequence[SubAgent | CompiledSubAgent | AsyncSubAgent] | None = None,  
    skills: list[str] | None = None,  
    memory: list[str] | None = None,  
    permissions: list[FileSystemPermission] | None = None,  
    backend: BackendProtocol | BackendFactory | None = None,  
    interrupt_on: dict[str, bool | InterruptOnConfig] | None = None,  
    response_format: ResponseFormat[ResponseT] | type[ResponseT] | dict[str, Any] |  
    None = None,  
    state_schema: type[DeepAgentState] | None = None,
```

```
context_schema: type[ContextT] | None = None,  
checkpointer: Checkpointer | None = None,  
store: BaseStore | None = None,  
debug: bool = False,  
name: str | None = None,  
cache: BaseCache | None = None  
) -> CompiledStateGraph[AgentState[ResponseT], ContextT, InputAgentState,  
OutputAgentState[ResponseT]]
```

