

```

jhadyel@Ubunt:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:cd:65:2c brd ff:ff:ff:ff:ff:ff
    altname enx080027cd652c
    inet 192.168.10.177/24 metric 100 brd 192.168.10.255 scope global dynamic enp0s3
        valid_lft 4026sec preferred_lft 4026sec
    inet6 fe80::a00:27ff:fed:652c/64 scope link proto kernel_ll
        valid_lft forever preferred_lft forever
jhadyel@Ubunt:~$ ping -c 4 192.168.10.1
PING 192.168.10.1 (192.168.10.1) 56(84) bytes of data:
64 bytes from 192.168.10.1: icmp_seq=1 ttl=64 time=1.11 ms
64 bytes from 192.168.10.1: icmp_seq=2 ttl=64 time=0.934 ms
64 bytes from 192.168.10.1: icmp_seq=3 ttl=64 time=1.66 ms
64 bytes from 192.168.10.1: icmp_seq=4 ttl=64 time=1.40 ms

--- 192.168.10.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 2997ms
rtt min/avg/max/mdev = 0.934/1.278/1.664/0.278 ms

```

```

jhadyel@Ubunt:~$ ip neigh
192.168.10.226 dev enp0s3 FAILED
192.168.10.1 dev enp0s3 lladdr d4:0d:ab:17:98:b8 REACHABLE
192.168.10.48 dev enp0s3 lladdr f4:4e:e3:b7:0c:e6 REACHABLE
jhadyel@Ubunt:~$

```

```

sudo apt install net-tools

```

```

jhadyel@Ubunt:~$ ip neigh
192.168.10.226 dev enp0s3 FAILED
192.168.10.1 dev enp0s3 lladdr d4:0d:ab:17:98:b8 REACHABLE
192.168.10.48 dev enp0s3 lladdr f4:4e:e3:b7:0c:e6 REACHABLE
jhadyel@Ubunt:~$ ping -c 4 192.168.10.246
PING 192.168.10.246 (192.168.10.246) 56(84) bytes of data:
64 bytes from 192.168.10.246: icmp_seq=1 ttl=128 time=0.537 ms
64 bytes from 192.168.10.246: icmp_seq=2 ttl=128 time=0.324 ms
64 bytes from 192.168.10.246: icmp_seq=3 ttl=128 time=0.299 ms
64 bytes from 192.168.10.246: icmp_seq=4 ttl=128 time=0.410 ms

--- 192.168.10.246 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 2997ms
rtt min/avg/max/mdev = 0.299/0.392/0.537/0.093 ms
jhadyel@Ubunt:~$ ip neigh
192.168.10.246 dev enp0s3 lladdr 08:00:27:45:bf:e8 REACHABLE
192.168.10.226 dev enp0s3 FAILED
192.168.10.1 dev enp0s3 lladdr d4:0d:ab:17:98:b8 REACHABLE
192.168.10.48 dev enp0s3 lladdr f4:4e:e3:b7:0c:e6 REACHABLE
jhadyel@Ubunt:~$

```

← 🔒 Not secure 192.168.10.177



Apache2 Default Page

Ubuntu

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/  
|-- apache2.conf  
|   |-- ports.conf  
|   |-- mods-enabled  
|       |-- *.load  
|       |-- *.conf  
|-- conf-enabled
```

```
shadyel@ubuntu:~$ sudo apt install apache2 -y  
apache2 is already the newest version (2.4.18-2ubuntu2.4).  
Summary  
Upgrading: 0, Installing: 0, Removing: 0, Not upgrading: 0  
shadyel@ubuntu:~$ sudo systemctl status apache2  
● apache2.service - The Apache HTTP Server  
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)  
   Active: active (running) since Thu 2026-09-10 00:10:17 UTC; 1h 26s ago  
     Invocation: 1b0371f9bb74e433988f8eb060724e7a18  
       Docs: https://httpd.apache.org/docs/2.4/  
     Process: 1000 ExecStartPre=/usr/sbin/apachectl graceful (code=exited, status=0/SUCCESS)  
    Main PID: 1000 (apache2)  
   Status: "Total requests: 0; 0/0/0 workers 0/0/0, requests/sec: 0; 0 bytes served/sec...: 0 B/sec"  
      Tasks: 15 (limit: 1091)  
     Memory: 5.3M (peak: 10.3M)  
        CPU: 0ms  
   CGroup: /system.slice/apache2.service  
           └─1000 /usr/sbin/apachectl -D start -f /etc/apache2.conf  
           └─1001 /usr/sbin/apachectl -D start -f /etc/apache2.conf  
           └─1002 /usr/sbin/apachectl -D start -f /etc/apache2.conf  
Sep 10 00:10:17 ubuntu systemd[1]: Starting apache2.service - The Apache HTTP Server...  
Sep 10 00:10:17 ubuntu systemd[1]: apache2.service: Could not reliably determine the service's fully qualified domain name, using 10.0.2.15. Set the 'DomainName' directive globally to suppress this message  
Sep 10 00:10:17 ubuntu systemd[1]: Started apache2.service - The Apache HTTP Server.  
Sep 10 00:10:17 ubuntu systemd[1]: Reloading apache2.service - The Apache HTTP Server...  
Sep 10 00:10:17 ubuntu systemd[1]: apache2.service: Could not reliably determine the service's fully qualified domain name, using 10.0.2.15. Set the 'DomainName' directive globally to suppress this message  
shadyel@ubuntu:~$ sudo systemctl restart smbd  
sudo systemctl status smbd  
● smbd.service - Samba SMB Daemon  
   Loaded: loaded (/usr/lib/systemd/system/smbd.service; enabled; preset: enabled)  
   Active: active (running) since Thu 2026-09-10 03:54:35 UTC; 22s ago  
     Invocation: c5c71f9bb74e433988f8eb060724e7a18  
       Docs: man:smbd(8)  
            man:samba(7)  
            man:smb.conf(5)  
     Process: 3777 ExecCondition=/usr/share/samba/is-configured smb (code=exited, status=0/SUCCESS)  
     Process: 3781 ExecStartPre=/usr/share/samba/update-apparmor-samba-profile (code=exited, status=0/SUCCESS)  
    Main PID: 3791 (smbd)  
   Status: "smbd: ready to serve connections..."  
      Tasks: 3 (limit: 1091)  
     Memory: 7.8M (peak: 7.8M)  
        CPU: 100ms  
   CGroup: /system.slice/smbd.service  
           └─3791 /usr/sbin/smbd --foreground --no-process-group  
           └─3794 "smbd: notifyd"  
           └─3795 "smbd: cleanupd"  
Sep 10 03:54:35 Ubuntu systemd[1]: Starting smbd.service - Samba SMB Daemon...  
Sep 10 03:54:35 Ubuntu systemd[1]: Started smbd.service - Samba SMB Daemon.
```

Network Error

Windows cannot access \\192.168.10.177\IA

Check the spelling of the name. Otherwise, there might be a problem with your network. To try to identify and resolve network problems, click Diagnose.

Hide details

Diagnose

Cancel

Error code: 0x800704f8


You can't access this shared folder because your organization's security policies block unauthenticated guest access. These policies help protect your PC from unsafe or malicious devices on the network.


```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\WINDOWS\system32> net use \\192.168.10.177\IA /user:sambauser
Enter the password for 'sambauser' to connect to '192.168.10.177':
The command completed successfully.

PS C:\WINDOWS\system32> |
```

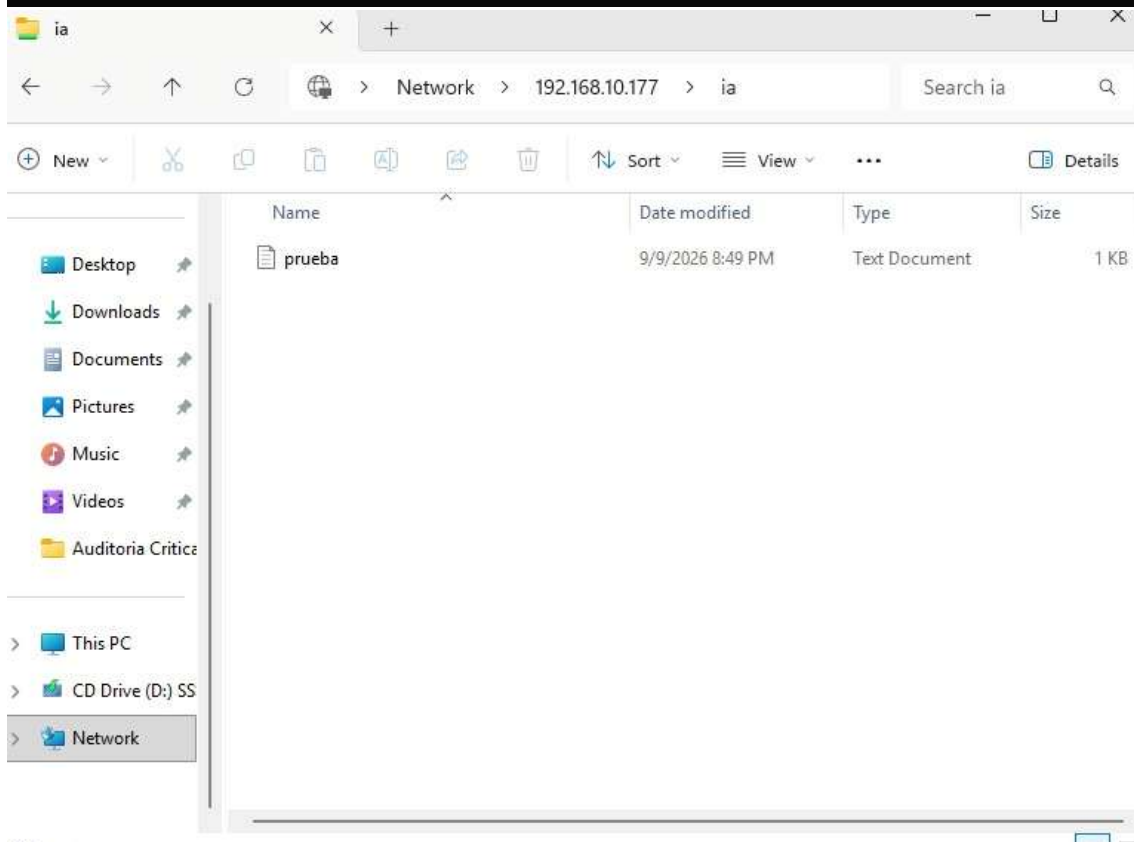

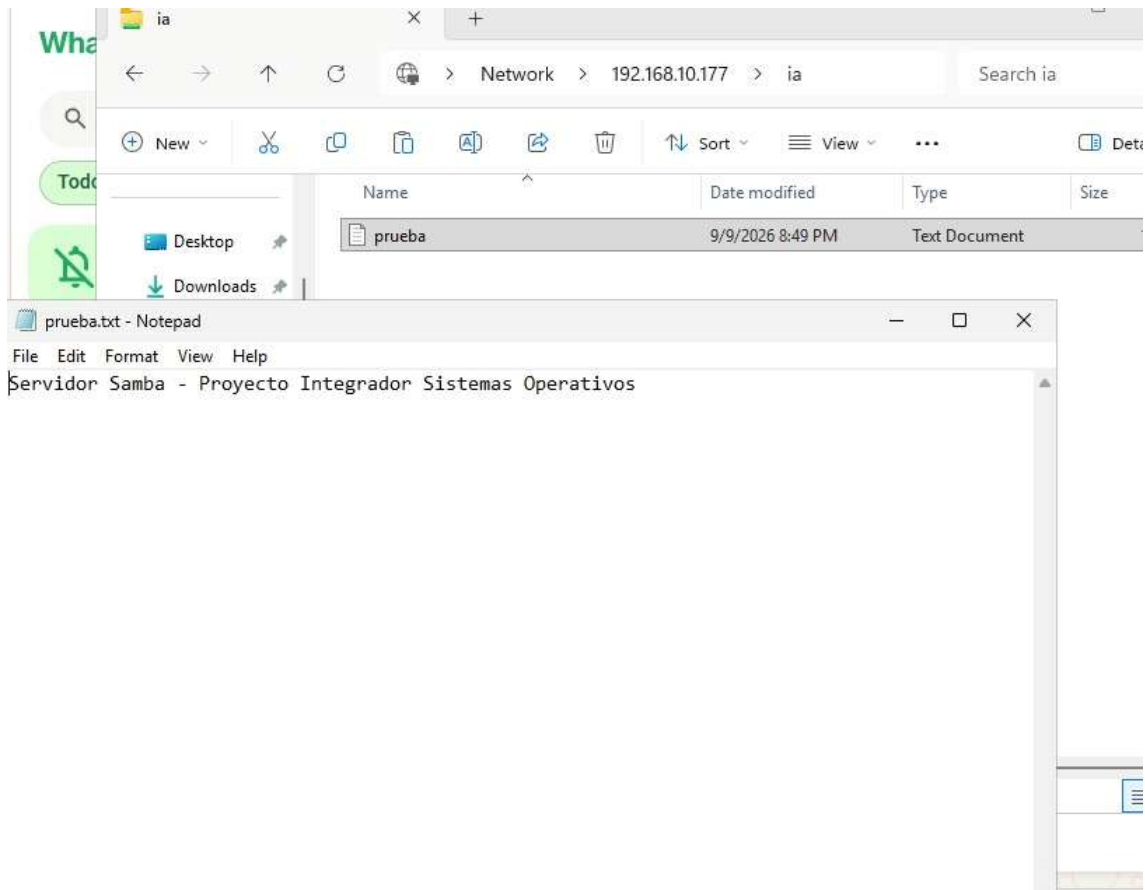

```
jhadyel@Ubuntu:~$ sudo groupadd iausers
jhadyel@Ubuntu:~$ sudo usermod -o6 iausers sambauser
jhadyel@Ubuntu:~$ sudo chown -R root:iausers /srv/samba/ia
jhadyel@Ubuntu:~$ sudo chmod -R 770 /srv/samba/ia
jhadyel@Ubuntu:~$ sudo chmod -R 770 /srv/samba/ia
jhadyel@Ubuntu:~$ ls -ld /srv/samba/ia
drwxrwx--- 2 root iausers 4096 Sep 10 03:49 /srv/samba/ia
jhadyel@Ubuntu:~$ sudo systemctl restart smbd
jhadyel@Ubuntu:~$ sudo systemctl status smbd
● smbd.service - Samba SMB Daemon
   Loaded: loaded (/usr/lib/systemd/system/smbd.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-09-10 04:10:27 UTC; 6s ago
 Invocation: 3e13652ac54848389dcc311d0dcb7eb8
    Docs: man:smbd(8)
          man:samba(7)
          man:smb.conf(5)
  Process: 4163 ExecCondition=/usr/share/samba/is-configured smb (code=exited, status=0/SUCCESS)
  Process: 4167 ExecStartPre=/usr/share/samba/update-apparmor-samba-profile (code=exited, status=0/SUCCESS)
 Main PID: 4172 (smbd)
   Status: "smbd: ready to serve connections..."
    Tasks: 3 (limit: 1891)
  Memory: 7.6M (peak: 7.9M)
     CPU: 79ms
   CGroup: /system.slice/smbd.service
           └─4172 /usr/sbin/smbd --foreground --no-process-group
             └─4175 "smbd: notifyd"
               └─4176 "smbd: cleanupd"

Sep 10 04:10:27 Ubuntu systemd[1]: smbd.service: Deactivated successfully.
Sep 10 04:10:27 Ubuntu systemd[1]: Stopped smbd.service - Samba SMB Daemon.
Sep 10 04:10:27 Ubuntu systemd[1]: Starting smbd.service - Samba SMB Daemon...
Sep 10 04:10:27 Ubuntu systemd[1]: Started smbd.service - Samba SMB Daemon.
```



```
jhadyel@Ubuntu:~$ sudo ufw status numbered
Status: active
```

	To	Action	From
	--	-----	----
[1]	22/tcp	ALLOW IN	Anywhere
[2]	80/tcp	ALLOW IN	Anywhere
[3]	Samba	ALLOW IN	Anywhere
[4]	22/tcp (v6)	ALLOW IN	Anywhere (v6)
[5]	80/tcp (v6)	ALLOW IN	Anywhere (v6)
[6]	Samba (v6)	ALLOW IN	Anywhere (v6)

```
jhadyel@Ubuntu:~$
```

← ↻ ⚠ Not secure 192.168.10.177

Ubuntu

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.


Configuration Overview

Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   |-- ports.conf
|-- mods-enabled
|   |-- *.load
|   |-- *.conf
|-- conf-enabled
|   |-- *.conf
|-- sites-enabled
|   |-- *.conf
```

Windows taskbar: Search, File Explorer, Edge, Mail, Calendar, 11:06 PM 9/9/2026

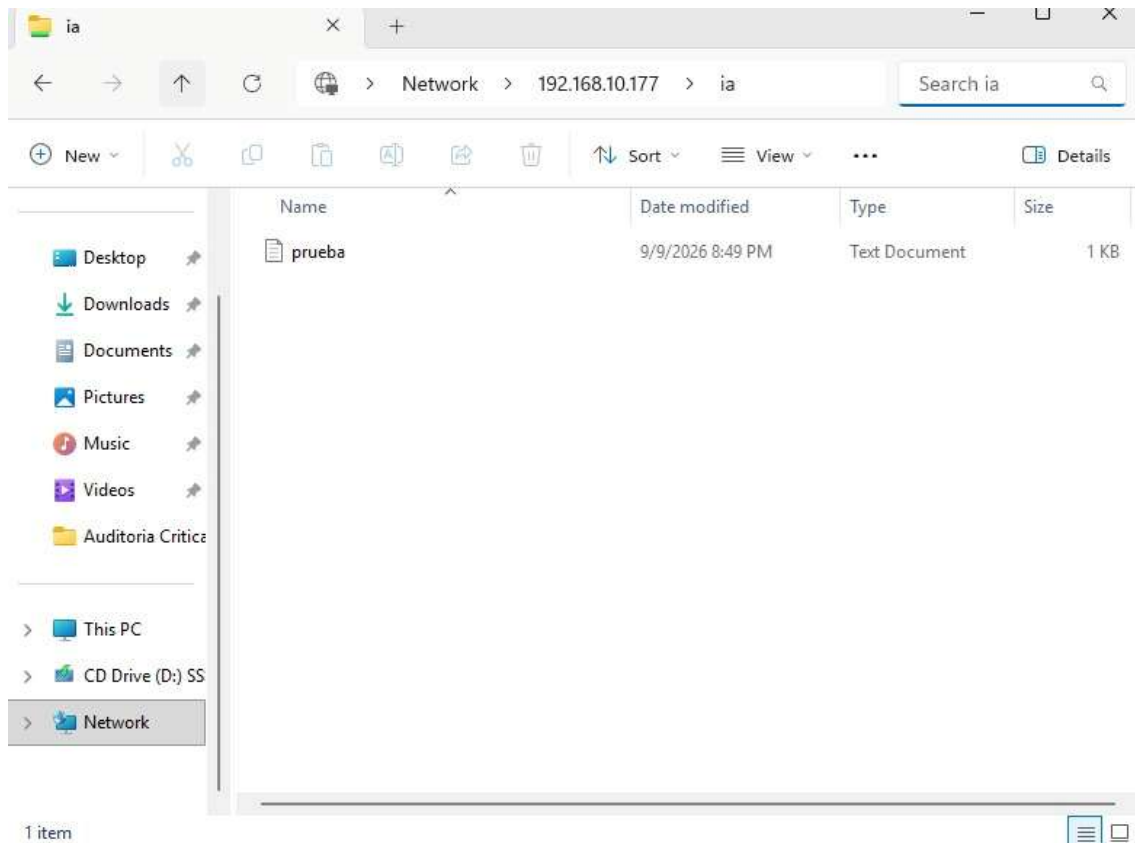

```
jhadyel@Ubunt:~$ chmod +x ~/backup_ia.sh
jhadyel@Ubunt:~$ cat ~/backup_ia.sh
#!/bin/bash

# Directorio que contiene las configuraciones de IA
ORIGEN="/opt/ia/config"

# Directorio donde se almacenarán los respaldos
DESTINO="/opt/backups"

# Fecha y hora para identificar cada respaldo
FECHA=$(date +"%Y-%m-%d_%H-%M-%S")


# Nombre del archivo de respaldo
BACKUP="$DESTINO/ia_config_$FECHA.tar.gz"

# Crear el respaldo comprimido
tar -czf "$BACKUP" "$ORIGEN"

# Mostrar el resultado
echo "Respaldo creado correctamente: $BACKUP"
```

```
jhadyel@Ubunt:~$ sudo ~/backup_ia.sh
tar: Removing leading `/' from member names
Respaldo creado correctamente: /opt/backups/ia_config_2026-09-10_04-18-49.tar.gz
jhadyel@Ubunt:~$ ls -lh /opt/backups
total 4.0K
-rw-r--r-- 1 root root 171 Sep 10 04:18 ia_config_2026-09-10_04-18-49.tar.gz
jhadyel@Ubunt:~$
```

```
jhadyel@Ubunt:~$ sudo crontab -l
*/5 * * * * /home/jhadyel/monitoreo.sh
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any').
#
# Notice that tasks will be started based on the cron's system
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent through
# email to the user the crontab file belongs to (unless redirected).
#
# For example, you can run a backup of all your user accounts
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab(5) and cron(8)
#
# m h dom mon dow   command
0 * * * * /home/jhadyel/backup_ia.sh
```

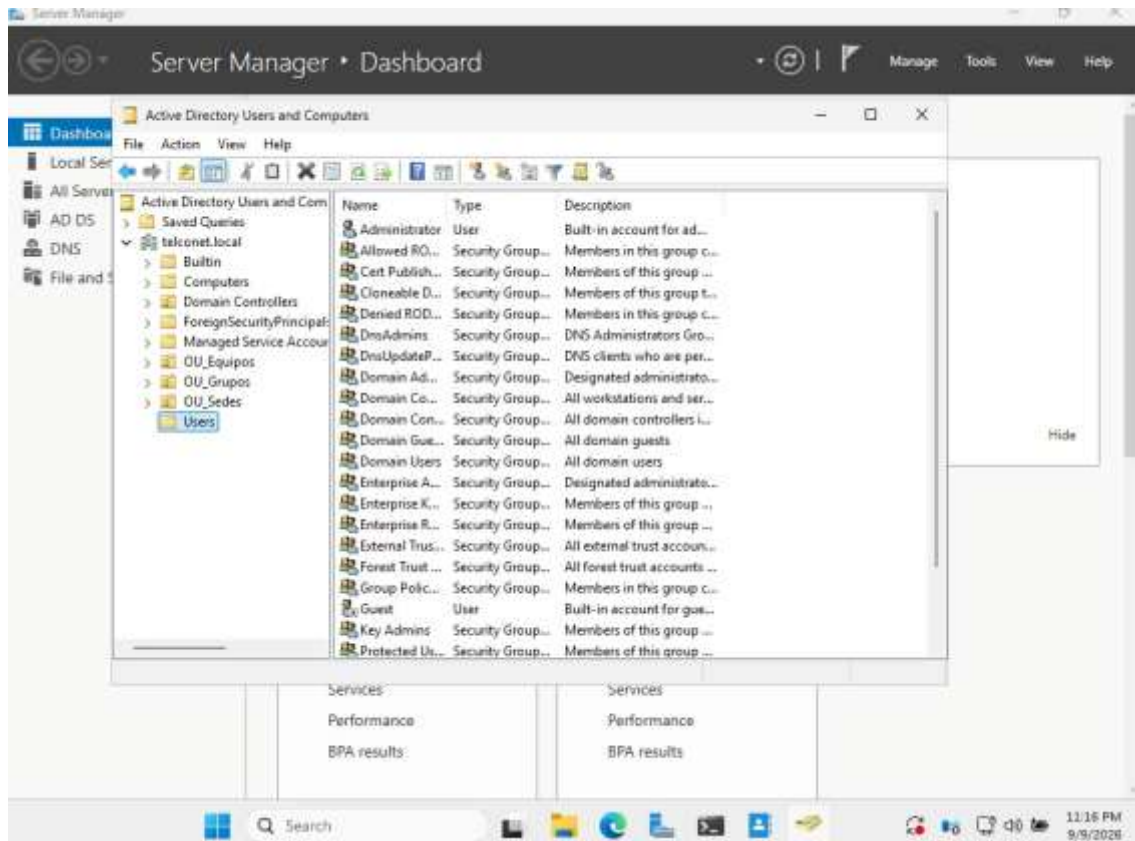

```

jhadyel@Ubuntu:~$ sudo ufw status numbered
Status: active

    To      Action From
    --      -
[ 1] 22/tcp  ALLOW IN  Anywhere
[ 2] 80/tcp  ALLOW IN  Anywhere
[ 3] Samba   ALLOW IN  Anywhere
[ 4] 22/tcp (v6) ALLOW IN  Anywhere (v6)
[ 5] 80/tcp (v6) ALLOW IN  Anywhere (v6)
[ 6] Samba (v6) ALLOW IN  Anywhere (v6)

jhadyel@Ubuntu:~$ ls -lh /opt/backups
total 4.0K
-rw-r--r-- 1 root root 171 Sep 10 04:18 ia_config_2026-09-10_04-18-49.tar.gz
jhadyel@Ubuntu:~$ sudo crontab -l
*/5 * * * * /home/jhadyel/monitoreo.sh
#
# Each task to run has to be defined through a single line
# indicating with different fields when the task will be run
# and what command to run for the task
#
# To define the time you can provide concrete values for
# minute (m), hour (h), day of month (dom), month (mon),
# and day of week (dow) or use '*' in these fields (for 'any').
#
# Notice that tasks will be started based on the cron's system
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sent through
# email to the user the crontab file belongs to (unless redirected).
#
# For example, you can run a backup of all your user accounts
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tar.gz /home/
#
# For more information see the manual pages of crontab(5) and cron(8)
#
# m h dom mon dow   command
0 * * * * /home/jhadyel/backup_ia.sh
jhadyel@Ubuntu:~$

```