



MINING DEALER BEST PRACTICE

STEERING CYLINDER SENSOR CENTERING TOOL - 794AC

Maintenance and
Repair

Application

Component Life
Management

Component
Renewal (CRC)

MARC
Management

Steering Cylinder Sensor Centering Tool - 794AC.....	1
1.0 Introduction.....	2
2.0 Best Practice Description	2
3.0 Implementation Steps.....	6
4.0 Benefits	6
5.0 Resources Required.....	6
6.0 Supporting Attachments / References	6
7.0 Related Best Practices	8
8.0 Acknowledgements	8

DISCLAIMER: The information and potential benefits included in this document are based upon information provided by one or more Cat® dealers, and such dealer(s) opinion of “Best Practices.” Caterpillar makes no representation or warranty about the information contained in this document or the products referenced herein. Caterpillar welcomes additional “Best Practice” recommendations from our dealer network.

December 2022
4.03-221212-1

1.0 Introduction



Due to the lack of a tool for the correct centering of the steering cylinder sensor, a device was designed and manufactured to avoid damage to the sensor stem.

2.0 Best Practice Description

This improvement consists of a disc to keep the sensor centered in the cylinder and a holder to fix the sensor during piston assembly.

To use this tool, you need to perform the following steps:

1. Install the bar (without adjusting it) to be able to adjust the distance.

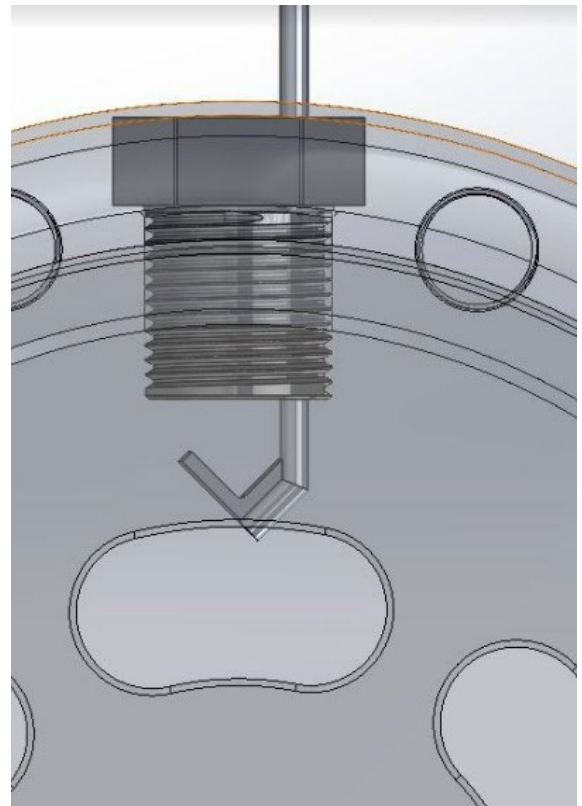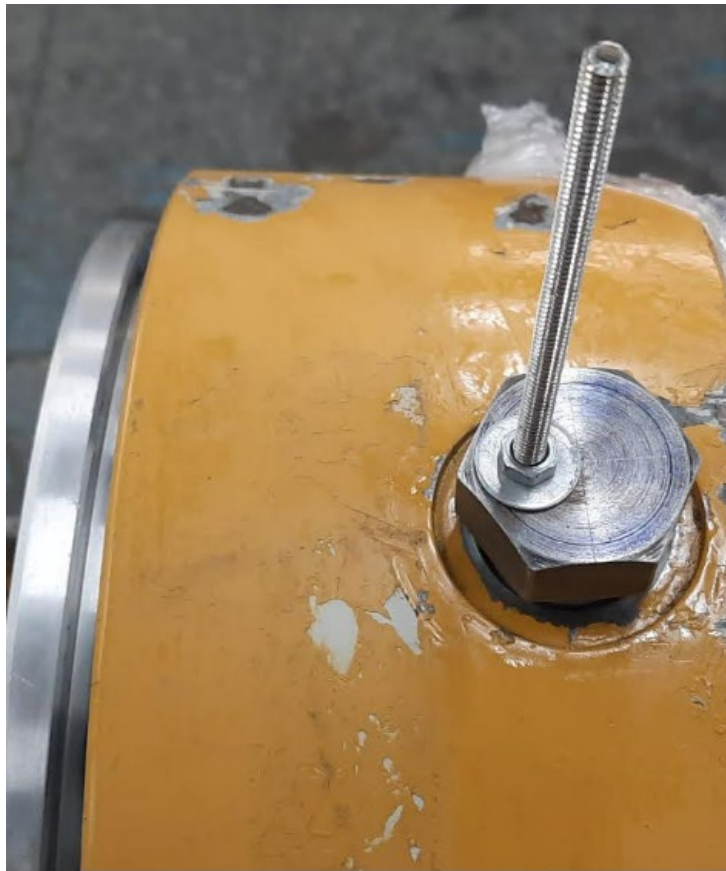

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Steering Cylinder Sensor Centering Tool - 794AC

DATE
12/12/2022

CHG
NO
00

NUMBER
4.03-221212-1

2. Install the centering disc on the steering cylinder.



3. Adjust the bar already centered.



THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR


Steering Cylinder Sensor Centering Tool - 794AC

DATE
12/12/2022


CHG
NO
00

NUMBER
4.03-221212-1

4. Remove the centering disc.

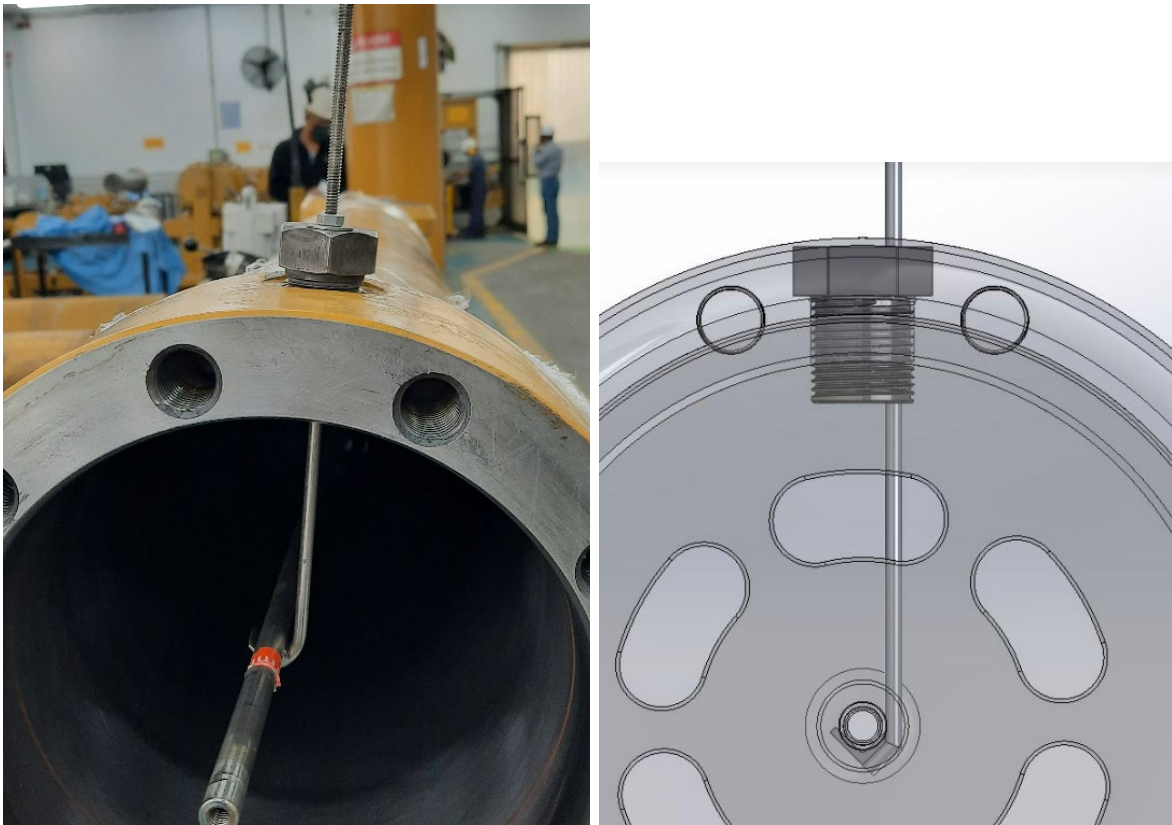

5. Adjust the steering cylinder support vertically to center the stem of the sensor assembly.

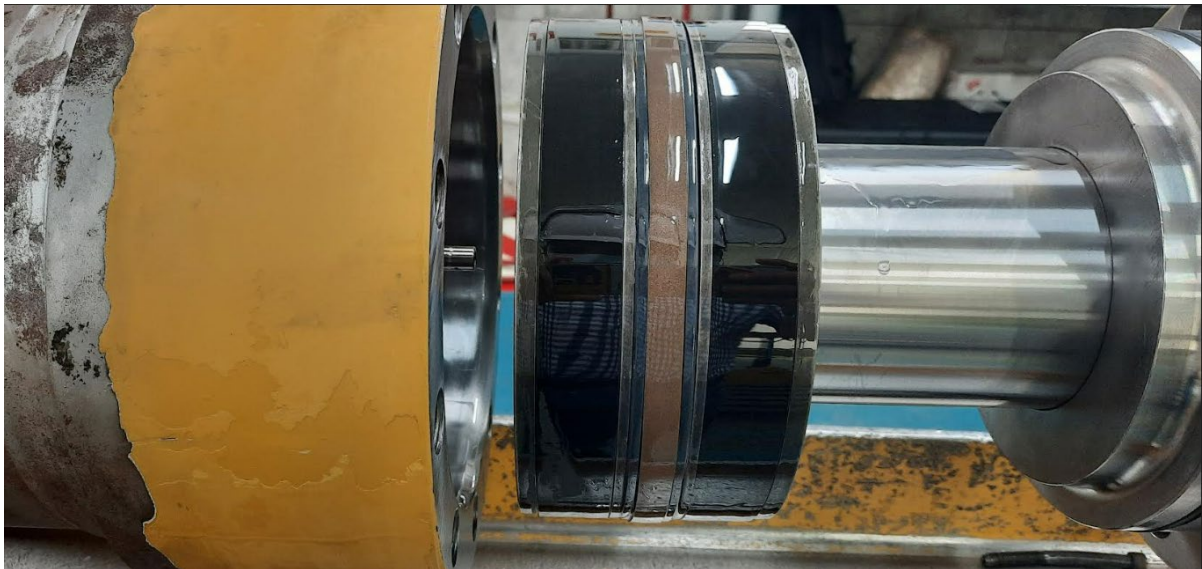


THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Steering Cylinder Sensor Centering Tool - 794AC	DATE 12/12/2022	CHG NO 00	NUMBER 4.03-221212-1

6. Install part of the piston in the steering cylinder.



7. Loosen the nut and turn the clamp pin 90°, lift and remove the clamp.

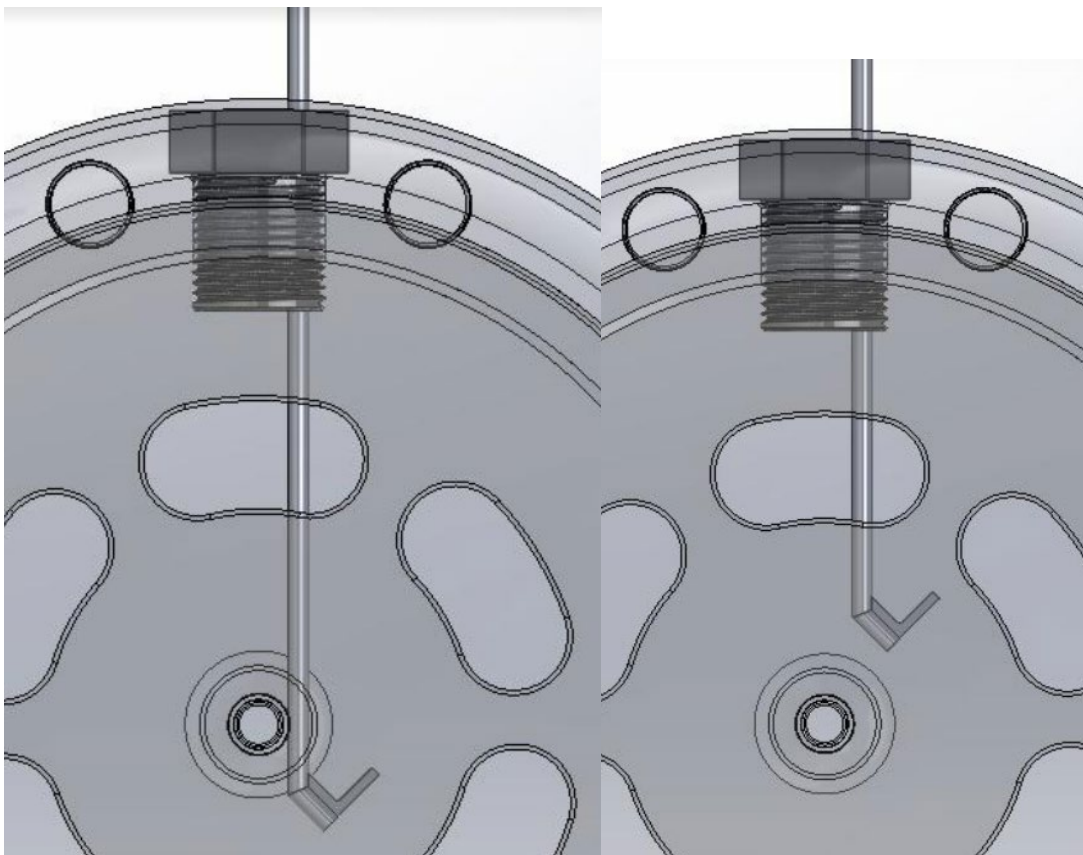

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Steering Cylinder Sensor Centering Tool - 794AC

DATE
12/12/2022

CHG
NO
00

NUMBER
4.03-221212-1

3.0 Implementation Steps

Manufacture the centering disk and the fastener as shown in the attached drawings.

4.0 Benefits



- Sensor damage prevention during installation
- Easy, simple and quick sensor installation

5.0 Resources Required

- Expense to fabricate the tool US\$ 550.00




6.0 Supporting Attachments / References

- Sensor bar

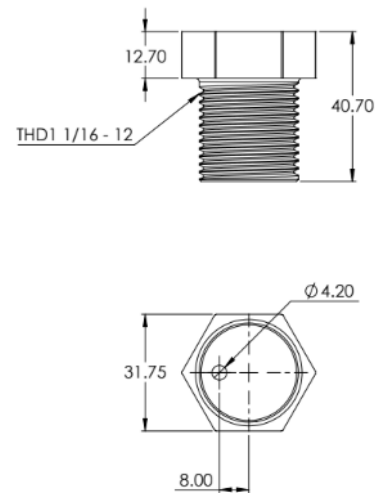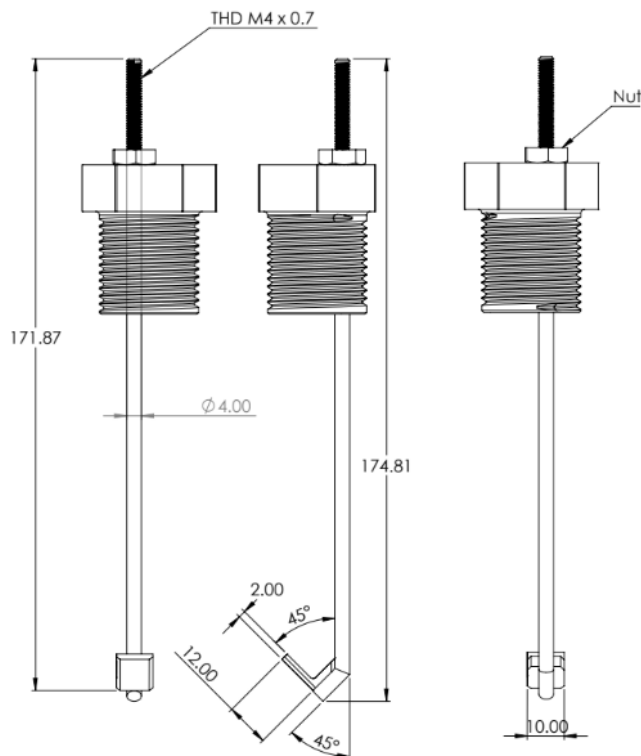

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Steering Cylinder Sensor Centering Tool - 794AC	DATE 12/12/2022	CHG NO 00	NUMBER 4.03-221212-1

- Centering disc

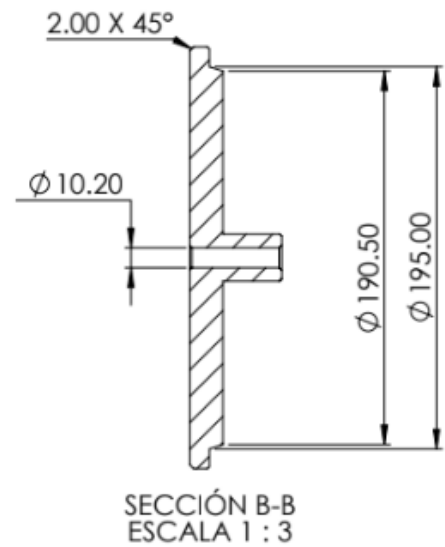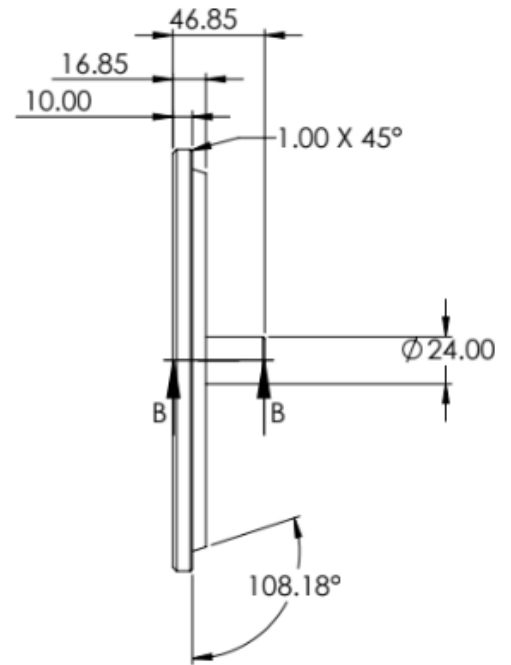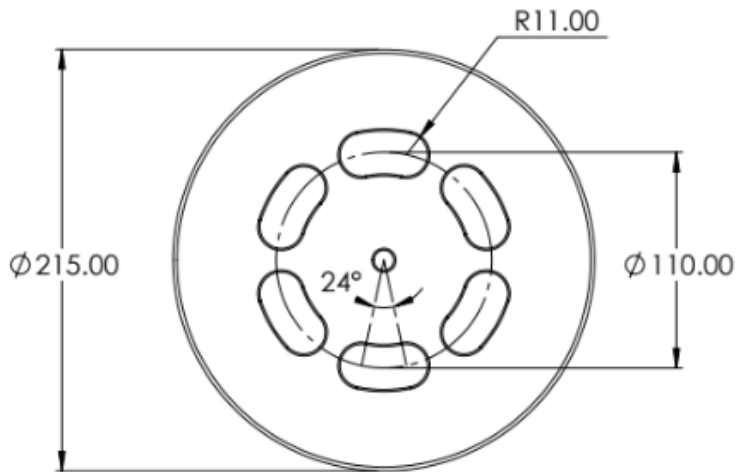

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR

Steering Cylinder Sensor Centering Tool - 794AC

DATE
12/12/2022

CHG
NO
00

NUMBER
4.03-221212-1

7.0 Related Best Practices

NA

8.0 Acknowledgements

This Best Practice was written by:
 Paul Schubert Changra Heredia
 Pablo Alcántara Michuy
 Ferreyros S.A.

The idea for this Best Practice belongs to:
 Paul Schubert Changra Heredia
 Pablo Alcántara Michuy
 Ferreyros S.A.

This Best Practice was revised by:
 Aninu Mitacc Vizcardo
 Ferreyros S.A.
aninu.mitacc@ferreyros.com.pe

THE INFORMATION HEREIN MAY NOT BE COPIED OR TRANSMITTED TO OTHERS WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR			
Steering Cylinder Sensor Centering Tool - 794AC	DATE 12/12/2022	CHG NO 00	NUMBER 4.03-221212-1