



Agentic AI Foundation


AGNTCon + MCPCon China

Where the **agentic stack** is being built.


From MCP Gateway to Agent Identity: Building Enterprise-Grade Access Infrastructure for AI Agents

Yating Mou · Infrastructure Engineer

From API Gateway to Agent Infrastructure

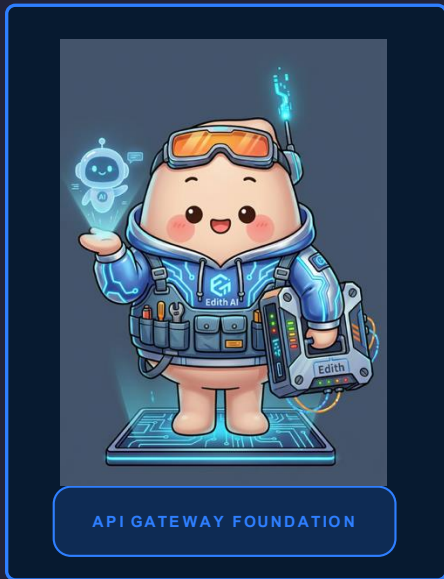

Extending gateway principles into the Agent era

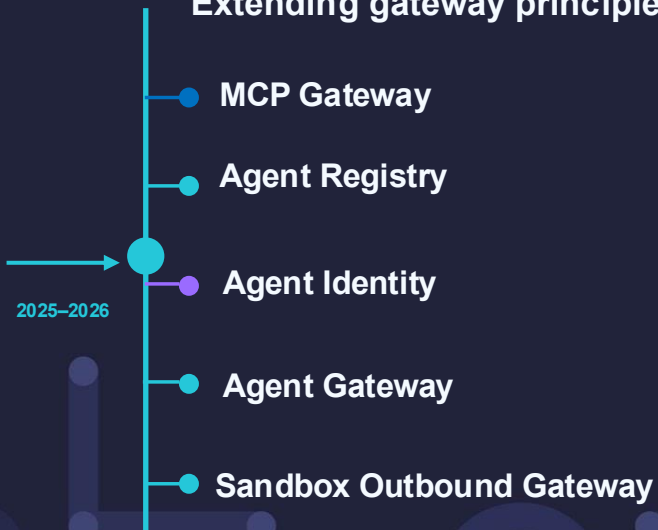

Who Is Actually Making This Call?



Downstream services typically see only one identity.

User token only: the Agent remains invisible

Service identity only: the user accountability chain is broken

Subject = User

Actor = Agent

Traditional identity chains break in agentic workflows

01 Identity Loss

After authentication at the entry point, only the `user_id` survives across service hops. Downstream systems cannot verify the Agent.


02 Privilege Amplification

Agents retain long-lived tokens or API keys, making access scope, propagation paths and credential lifecycles difficult to control.

03 Audit Gaps

Logs record only the user or the service, making it impossible to reconstruct who authorized which Agent to do what.

Inbound and outbound form one identity chain

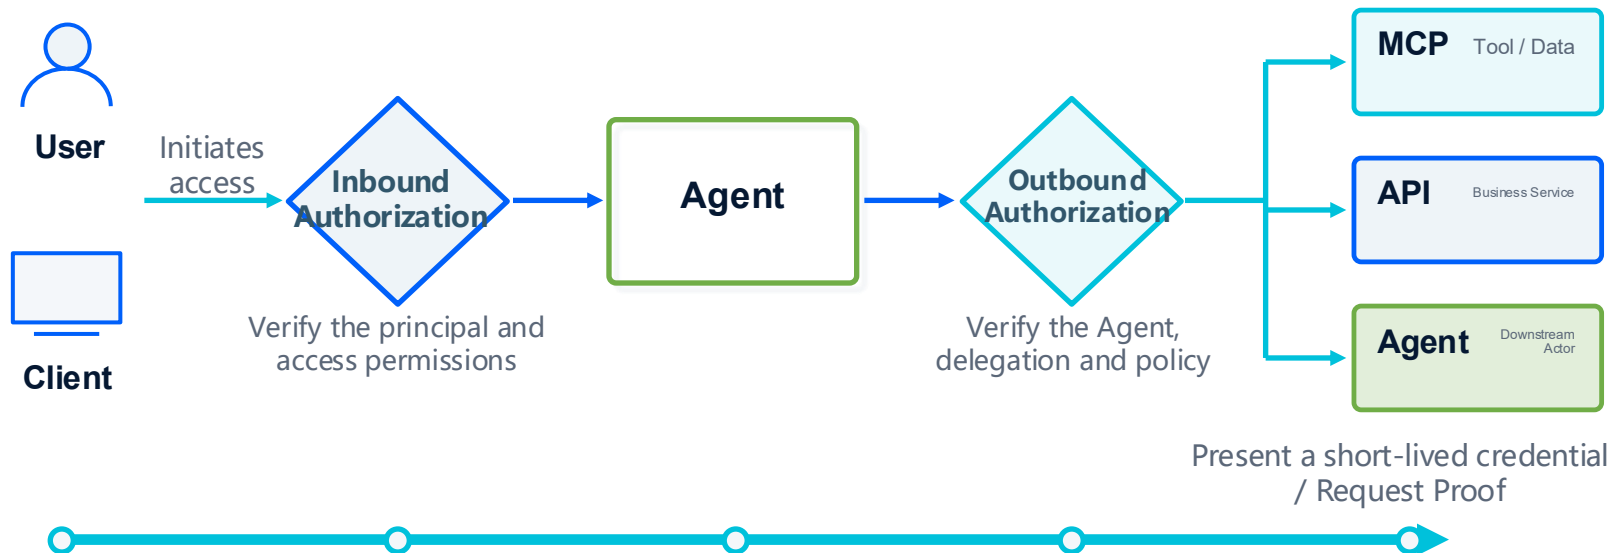

The dual-subject User + Agent context spans the entire call chain

The gateway verifies and reconstructs trusted context at protocol boundaries, so legacy services do not need to understand Agent protocols.

01

Unified Identity Token

Preserve the user-agent relationship across service boundaries.

JWT · RFC 8693 Token Exchange · Subject-Actor Chain

03

Token Acquisition & Refresh

Effective Permissions = Agent Permissions $\cap$ User Permissions.

User Delegation · Permission Intersection · Cedar Policy

02

Agent Identity Registry

Issue and manage verifiable identities for every agent.

Platform-Provisioned Credentials · Public-Key Registration


04

Least-Privilege Access

Effective Permissions = Agent Permissions $\cap$ User Permissions.


User Delegation · Permission Intersection · Cedar Policy

One token carries user identity, agent identity and context

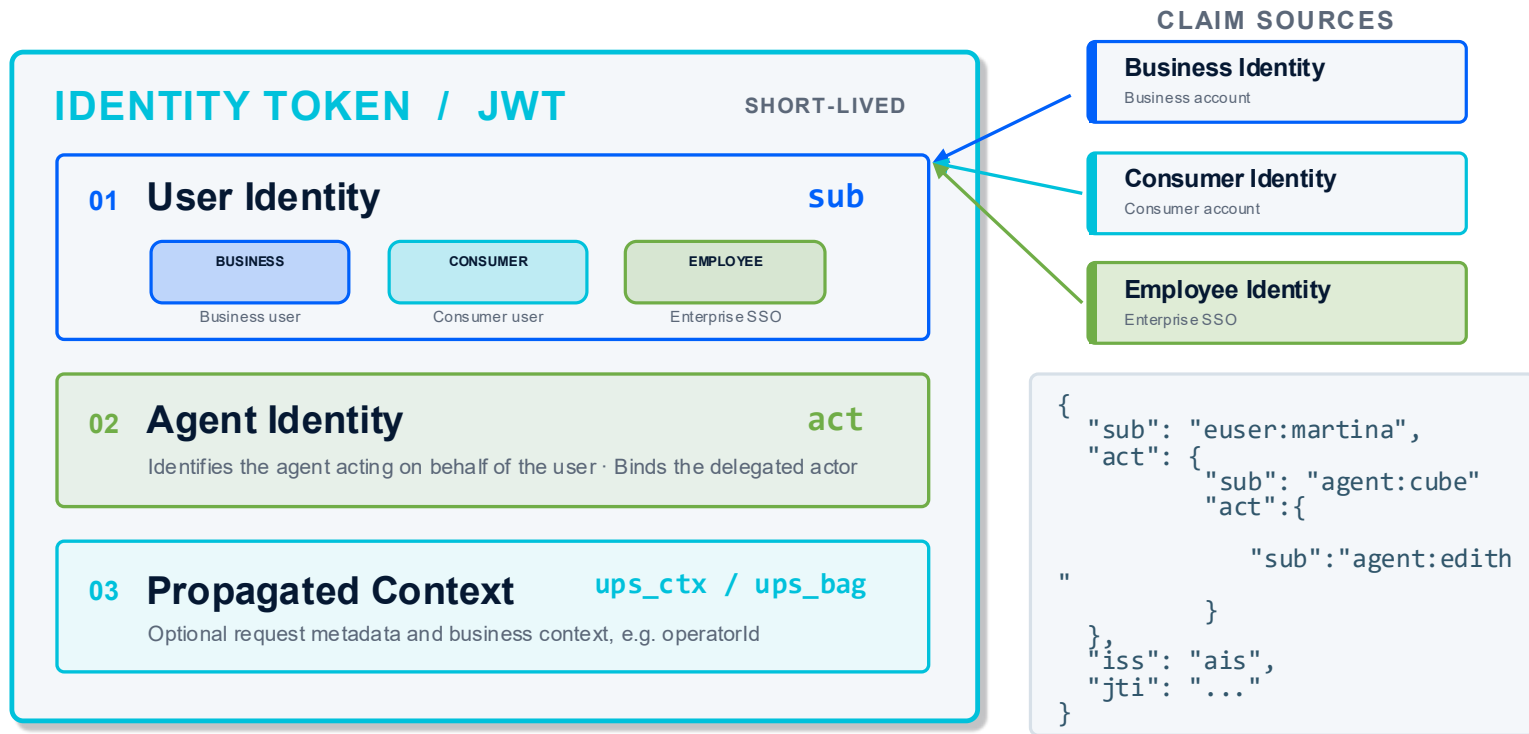

sub carries one user identity · act identifies the delegated agent · context claims are optional

Trusted Identify Context

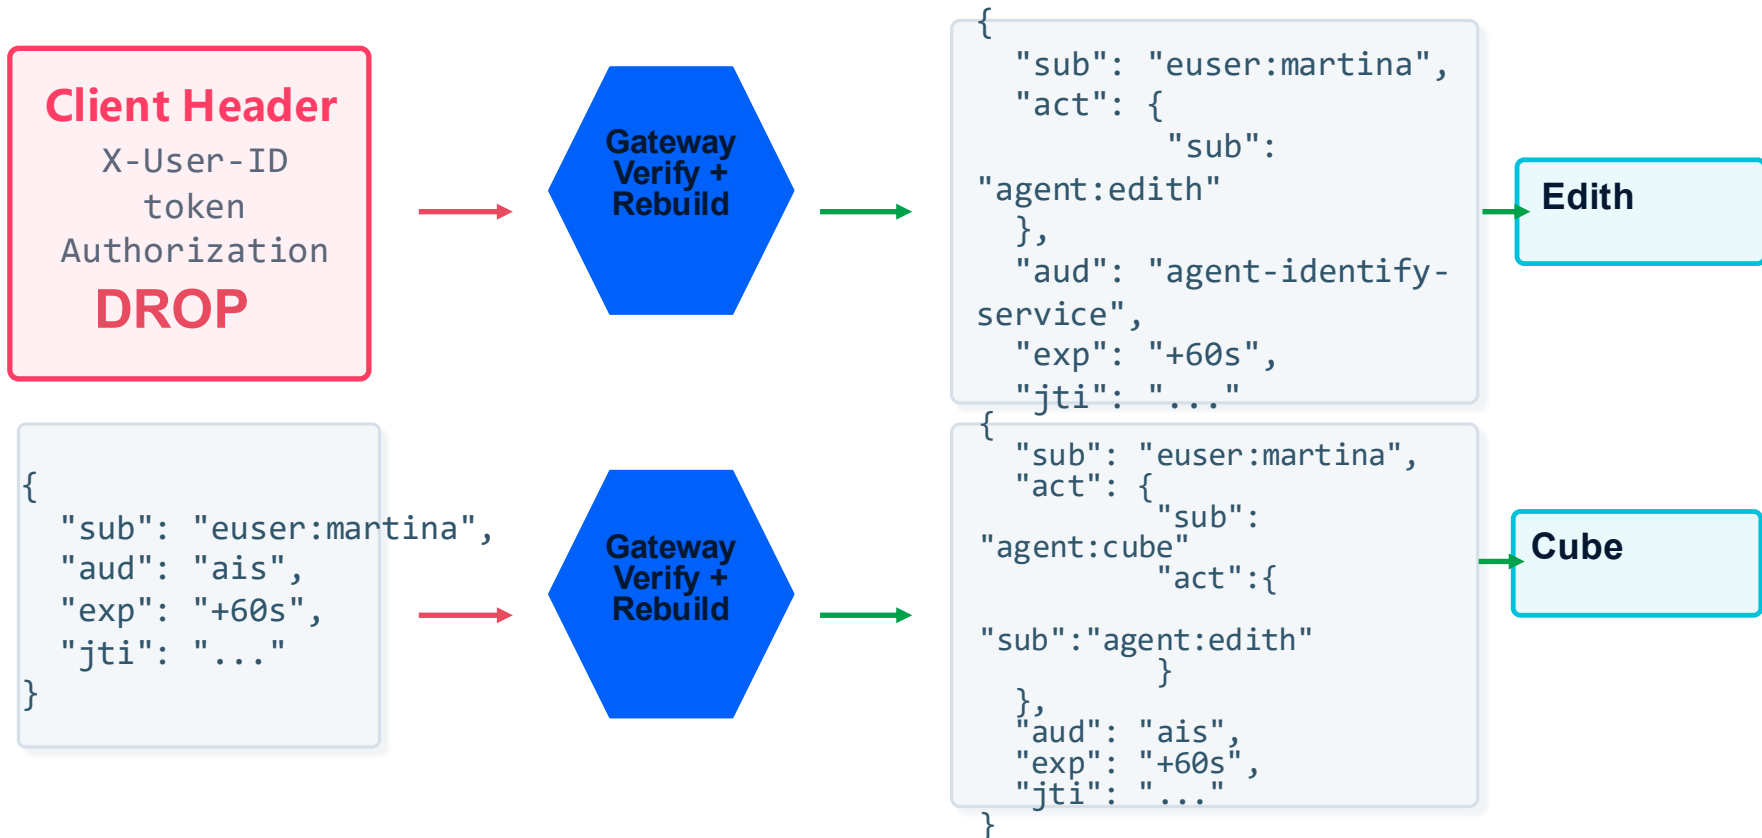

Agent Identity Registry

The integration model depends on where the agent is hosted — both paths converge on the same identity registry.

PATH A Platform-Hosted Agent

Automatic registration and platform-provisioned identity



PATH B Developer-Hosted Agent


Public-key registration; the private key never leaves the agent environment




Token Acquisition & Refresh

Three paths to a dual-subject Agent JWT

INITIAL ISSUANCE

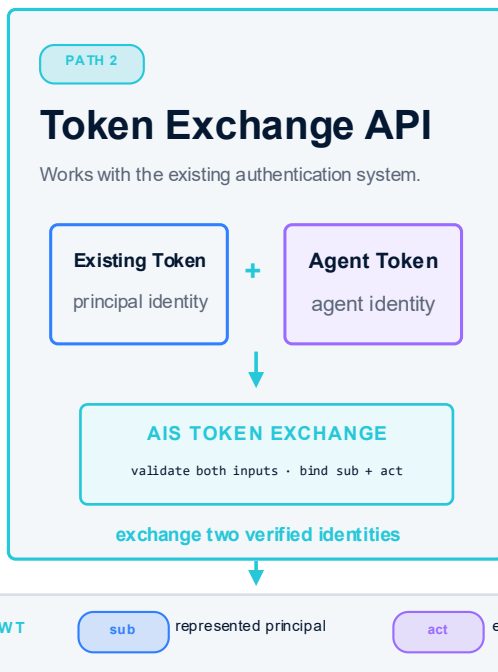

REFRESH

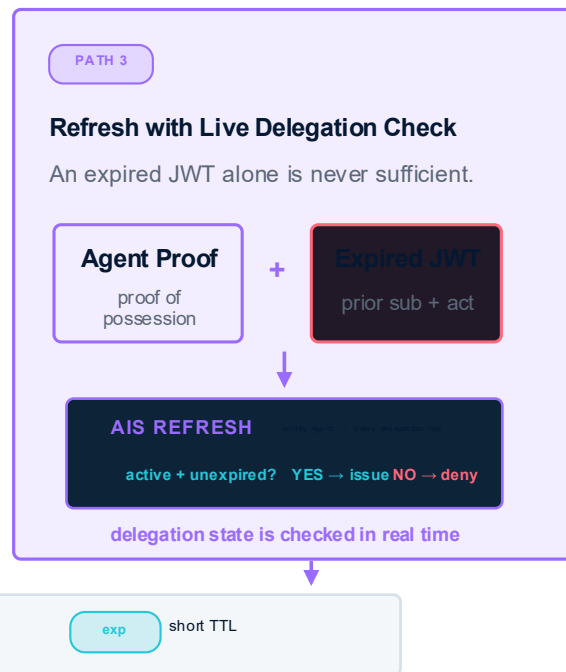

Least Privilege

Agent Permissions  User Permissions

Least-Privilege Result

```
CEDAR POLICY ENGINE permit ( principal, action, resource ) when { context conditions }
```


Business teams request access for an agent; approved rules are published to the target resources and loaded by the gateway.

CONTROL PLANE



Policy ownership stays with the protected resource; enforcement stays at the gateway.

From connectivity to governance

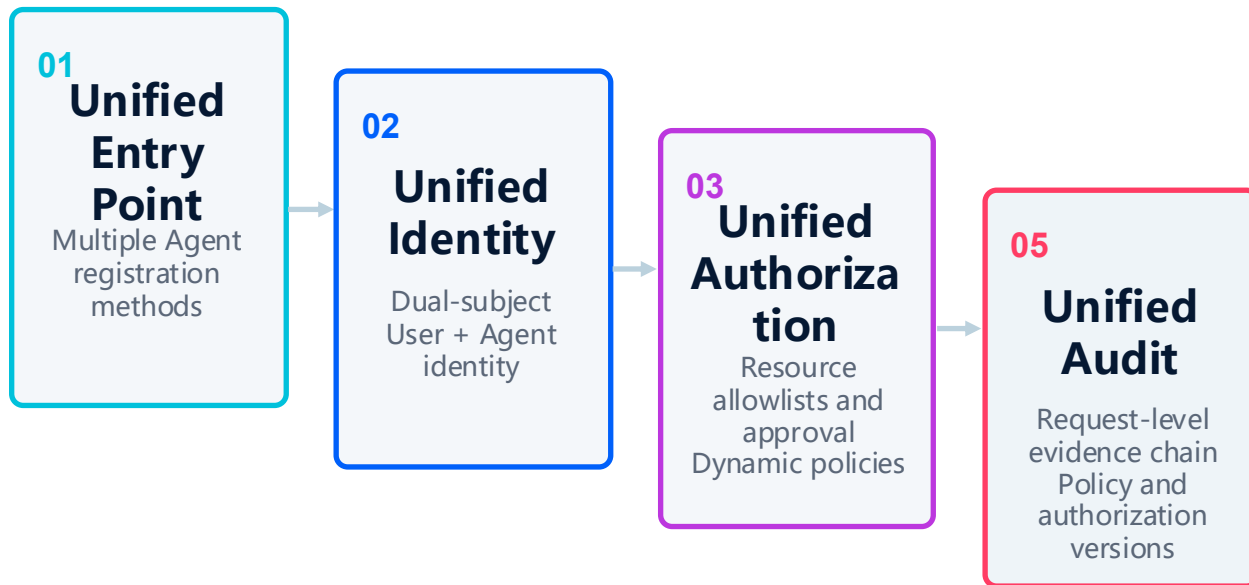

Three Takeaways



1 An Agent Is an Independent Actor

It is a container for the user token nor an unlimited extension of the user.

2 Keep Identity Short-lived and Permissions Dynamic

Put identity in short-lived proofs; keep permissions in a real-time, revocable control plane.

3 The Gateway Connects the New and Existing Worlds

Enforce identity, policy and context transformation consistently at protocol boundaries to create an end-to-end chain of trust.

Q&A

**Every agent action should be
attributable, bounded, revocable and auditable.**



Where the **agentic stack** is being built.