


video\_settings\_enc  
\_ctx\_s

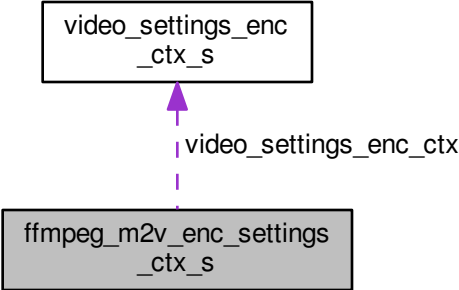

```
graph BT; A[ffmpeg_m2v_enc_settings_ctx_s] -.-> B[video_settings_enc_ctx_s];
```

The diagram illustrates a pointer relationship between two context structures. At the bottom is a grey rectangular box containing the text 'ffmpeg\_m2v\_enc\_settings\_ctx\_s'. A dashed purple arrow points upwards from this box to a white rectangular box at the top containing the text 'video\_settings\_enc\_ctx\_s'. To the right of the arrow, the text 'video\_settings\_enc\_ctx' is written.

video\_settings\_enc\_ctx

ffmpeg\_m2v\_enc\_settings  
\_ctx\_s