


audio_settings_enc
_ctx_s

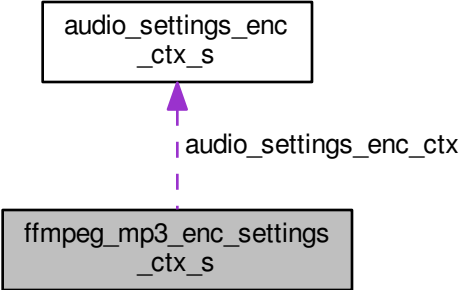

```
graph BT; A[ffmpeg_mp3_enc_settings_ctx_s] -.-> B[audio_settings_enc_ctx_s];
```

The diagram illustrates a pointer relationship between two context structures. At the bottom is a grey-shaded box labeled 'ffmpeg_mp3_enc_settings_ctx_s'. A dashed purple arrow points upwards from this box to a white box at the top labeled 'audio_settings_enc_ctx_s'. To the right of the arrow, the text 'audio_settings_enc_ctx' is written.

audio_settings_enc_ctx

ffmpeg_mp3_enc_settings
_ctx_s