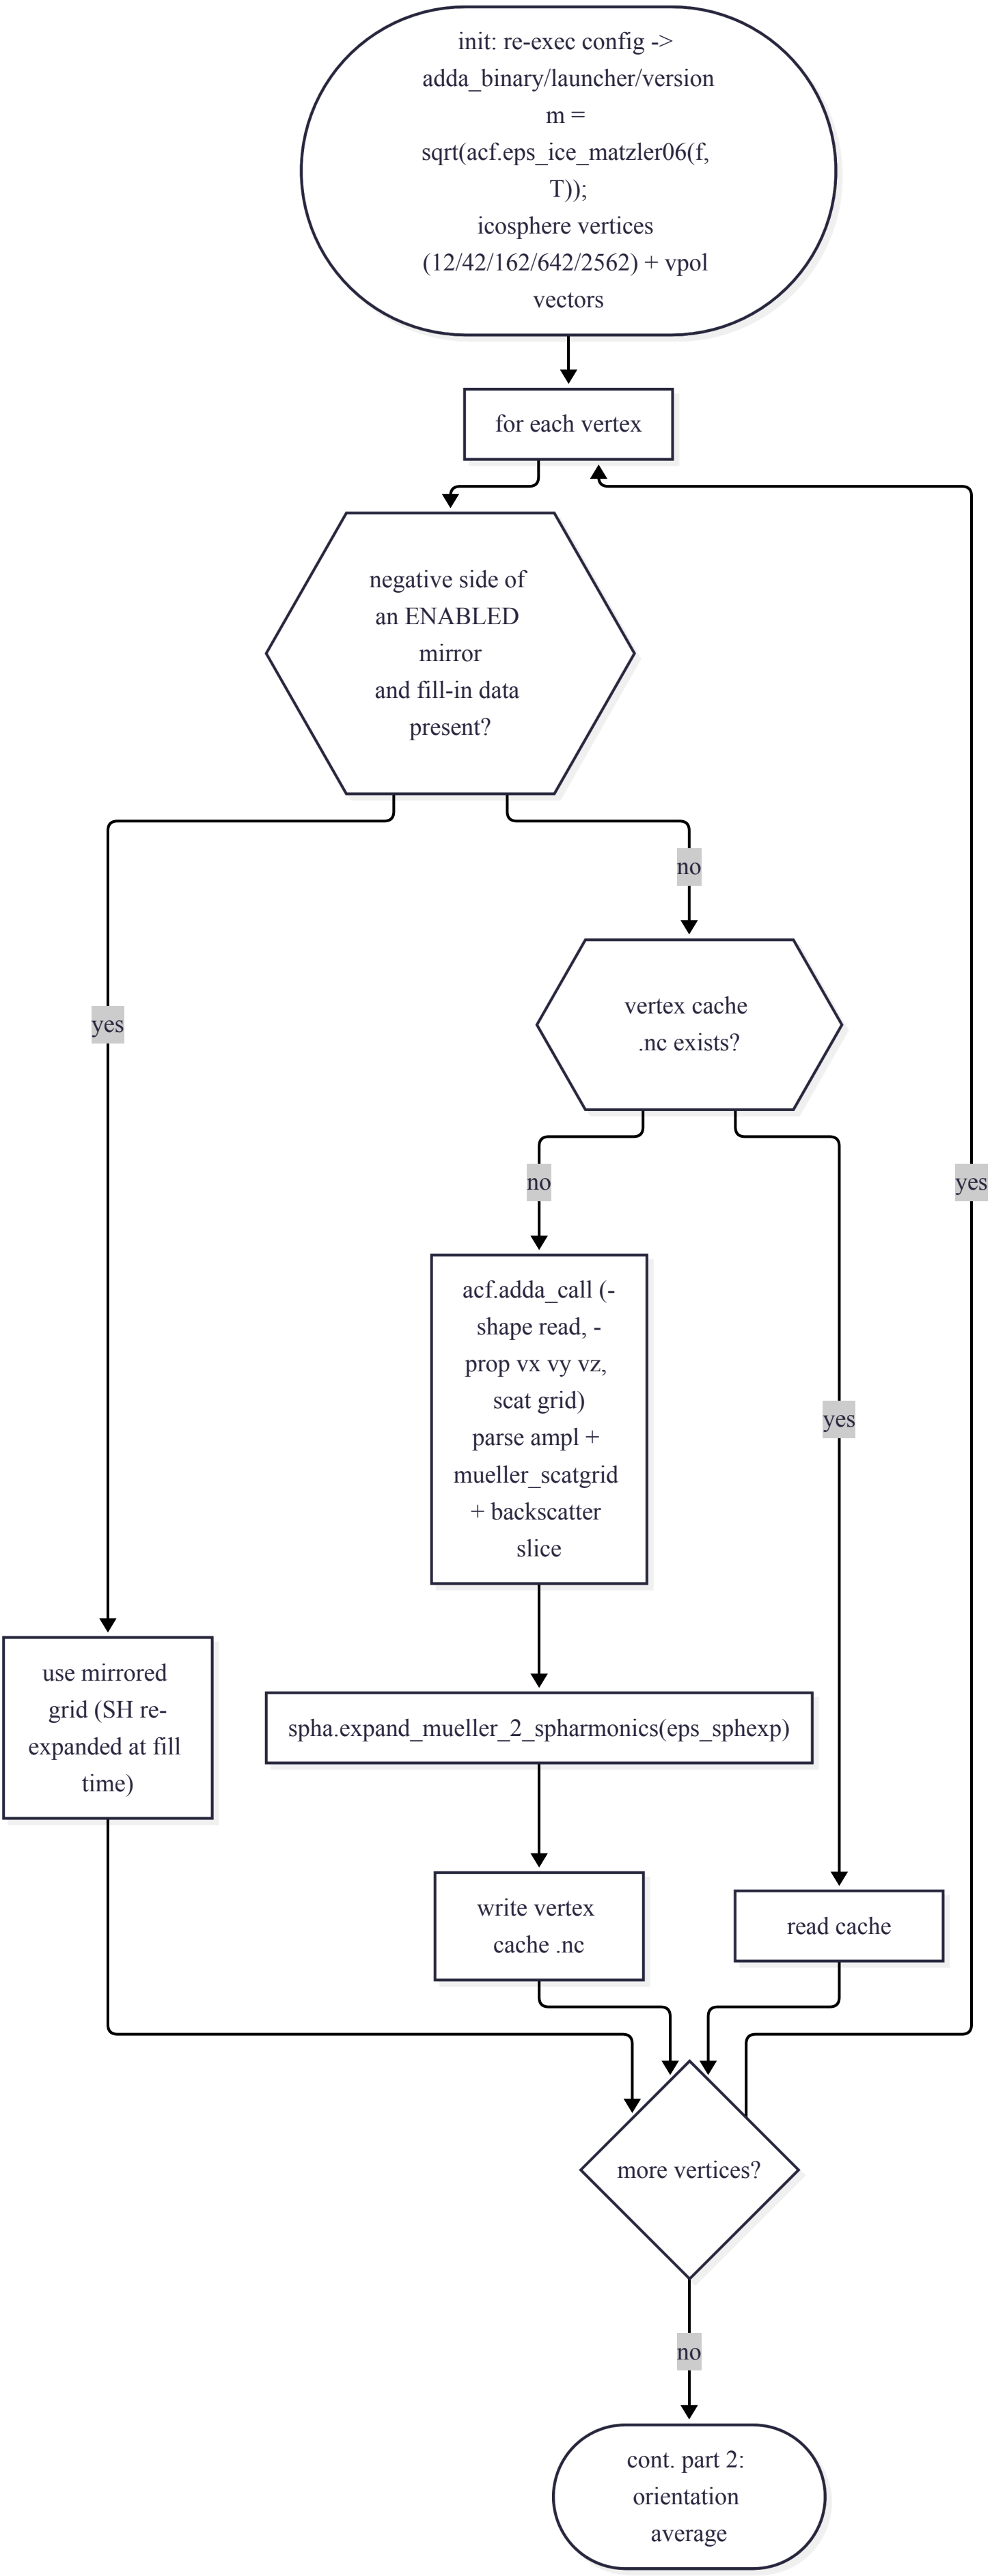

init: re-exec config -> adda_binary/launcher/version
m = sqrt(acf.eps_ice_matzler06(f, T));
icosphere vertices (12/42/162/642/2562) + vpol vectors
for each vertex
negative side of an ENABLED mirror and fill-in data present?
yes
no
use mirrored grid (SH re-expanded at fill time)
vertex cache .nc exists?
no
yes
acf.adda_call (-shape read, -prop vx vy vz, scat grid)
parse ampl + mueller_scatgrid + backscatter slice
spha.expand_mueller_2_spharmonics(eps_sphexp)
write vertex cache .nc
read cache
more vertices?
no
yes
cont. part 2: orientation average