

PAVE

Samuel Leventhal*
samlev@cs.utah.edu
University of Utah School of
Computing: Scientific Computing
and Imaging Institute

Mark Kim
kimmb@ornl.gov
Oak Ridge National Lab

Dave Pugmire
pugmire@ornl.gov
Oak Ridge National Lab

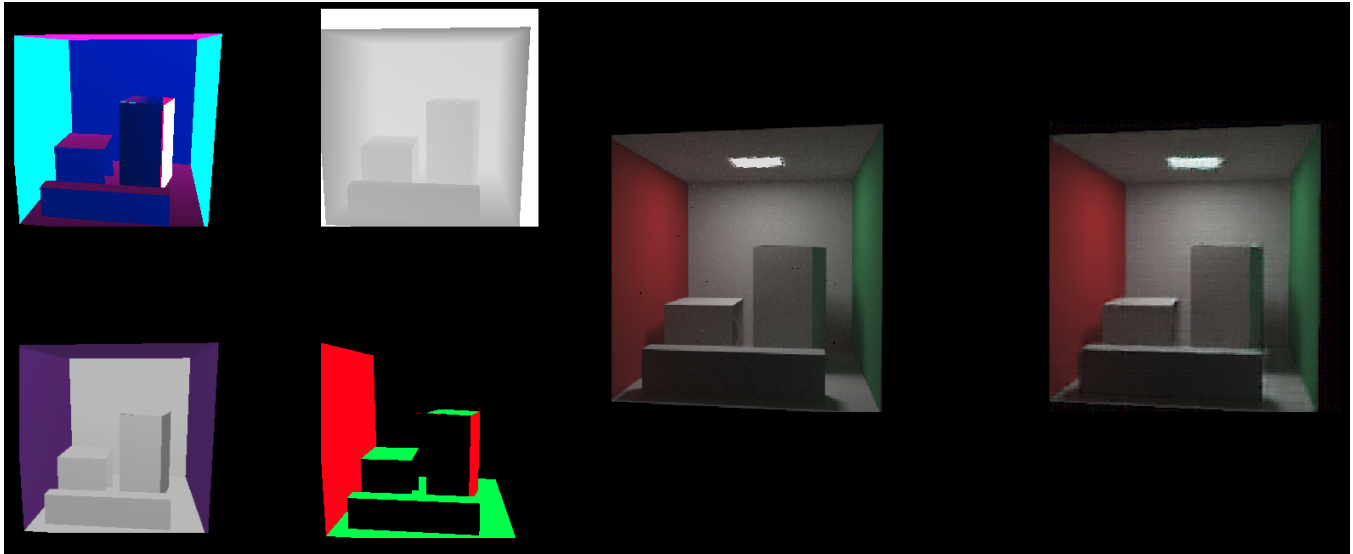


Figure 1: Rendered Conditional Geometry Buffers (**left set**) and artificial rendering with conditional generative adversarial neural network (**right couple**) comparing ground truth path traced rendering (**left**) with image generated (**right**).

ABSTRACT

In this work we offer an approachable platform for visualization tasks by employing a neural network for real time rendering and accurate light transport simulation within the framework of Python made compatible for distributed systems and high performance computing (HPC). The provided model is a coalescence of VTK-m, a visualization toolkit fit for massively threaded architectures, PyTorch, an increasingly popular language within machine learning due to robust libraries for neural networks, and Adios, an adaptable unified IO framework for data management at scale. The resulting work accomplishes this combination by utilizing VTK-m to construct a path trace renderer able to fluidly and efficiently communicate to a conditional Generative Adversarial Network

(cGAN) by means of Adios during training. The resulting generative model serves as a filter for rendered images and visual simulations capable of approximating indirect illumination and soft shadows at real-time rates while maintaining quality comparable to offline approaches. "in situ deep learning for scientific visualization"

CCS CONCEPTS

• Theory of computation → Parallel computing models; Distributed computing models; Structured prediction; Adversarial learning; Data structures and algorithms for data management; Probabilistic computation; Database query languages (principles); • Applied computing → Computer-aided design.

KEYWORDS

VTKm, neural networks, generative adversarial network, Adios, PyTorch, path tracing

ACM Reference Format:

Samuel Leventhal, Mark Kim, and Dave Pugmire. 2019. PAVE. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

Unpublished working draft. Not for distribution.

copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference'17, July 2017, Washington, DC, USA
© 2019 Association for Computing Machinery.
ACM ISBN 978-x-xxxx-xxxx-x/YY/MM. . . \$15.00
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 APPLICABLE “AREA OF INTERESTS” TARGETS

- (1) In situ data management and infrastructures Current Systems: production quality, research prototypes , Opportunities ,Gaps Current Systems: integration of VTKm, Adios2 and Python (PyTorch). Prototype being a conditional generative adversarial network (cGAN) designed to use a VTKm based pathtracer applied but not limited to learning global illumination and light behavior in rendering tasks. Opportunities: Introducing a framework allowing researchers easy access to python on HPC systems as well as machine learning aided technique to treat and study experimental data used in scientific simulations as learnable probability distributions with derived conditional dependencies of interest.
- (2) System resources, hardware, and emerging architectures. Enabling Hardware, Hardware and architectures that provide opportunities for In situ processing, such as burst buffers, staging computations on I/O nodes, sharing cores within a node for both simulation and in situ processing
Enabling Hardware: By constructing an architecture allowing for Python to interface with VTKm data management controlled by Adios2 the proposed software allows for a well distributed simulation task among cores.
- (3) Methods and algorithms: Analysis: feature detection, statistical methods, temporal methods, geometric and topological methods Visualization: information visualization, scientific visualization, time-varying methods
- (4) Case Studies and Data Sources In situ methods/systems applied to data from simulations and/or experiments / observations
- (5) Simulation and Workflows: Integration: data modeling, software-engineering, Workflows for supporting complex in situ processing pipelines
- (6) Requirements, Usability: Reproducibility, provenance and meta-data

2 INTRODUCTION

3 RELATED WORK

Real time true to life quality renderings of light transport remains an active area of research with a number of various approaches. To preserve real-time rates, previous works have stored precomputed radiance transfers for light transport as spherical functions within a fixed scene geometry which are then adjusted for varied light and camera perspective through projections within a basis of spherical harmonics [11]. Similarly, Light Propagation Volumes have been used to iteratively propagate light between consecutive grid positions to emulate single-bounce indirect illumination [6]. More recently, deep neural networks have been employed as a learned look up table for real-time rates with offline quality. With the use of convolutional neural networks Deep Shading is able to translate screen space buffers to into desired screen space effects such as indirect light, depth or motion blur. Similar to the methodology implemented in this work, Deep Illumination uses a conditional adversarial network (cGAN) to train a generative network with screen space buffers allowing for a trained network able to produce accurate global illumination with real-time rates at offline quality through a “one network for one scene” setting [12].

4 TECHNIQUE OVERVIEW

Utilization of PAVE consists of three consecutive phases: rendering phase of conditional training images, training phase of the generative neural network, and execution phase of the trained network. Three core components, VTK-m, PyTorch,

and Adios2 fulfill a unique functional requirement during each stage. In this section we describe the independent design and global role each system plays.

4.1 System Overview

To achieve our goal of a conditional generative neural network capable of rendering geometric dependent object path simulations we begin by rendering informative conditional image buffers along with ground truth scene renderings. For this purpose the VTK-m was chosen due to its scalability and robust capability for HPC visualization tasks. Provided the training set of conditional and ground truth images two neural networks, one convolutional and one generative, play a zero-sum game common to training GANs. To segue data management of training images the path tracer saves the training set in a distributed setting with the use of Adios2. During training PyTorch is then able to retrieve needed image data through the use of the adaptable IO provided by Adios’s Python high-level APIs.

4.2 Path Tracer Design

Conditional image attributes and high quality ground truth rendered images are required for the training stage. For this reason the first stage of PAVE consists of generating a visual scene or simulation with VTK-m. Within the framework of VTK-m the implemented ray tracer renders images through means common to commercial ray tracers such as Monte Carlo sampling for shapes of interest, light scattering, randomly directed light paths, material sampling and direct sampling. The image buffers needed to compute light paths afford an informative conditional dependence on the behavior of lighting based on the geometry and light sources within a scene. These conditional buffers, namely albedo, direct lighting, normals of surfaces and depth with respect to camera are then stored within VTK-m with Adios to maintain scalability of the system. For subsequent phases of PAVE the training data can then be retrieved from file again through Adios differing only in the API needed.

4.3 Neural Network Design

The cGAN used closely follows that introduced by Thomas and Forbes with Deep Illumination [12]. Both the discriminator and generator network are deep convolutional neural networks implemented in PyTorch using training data retrieved from Adios files formatted and stored by the VTK-m path tracer. The training stage relies on four conditional buffers depth, albedo, normals and direct lighting along with an associated ground truth image of high light sample count and ray depth. Given the four conditional buffers the generator attempts to construct the ground truth image from noise. The discriminator is then fed both the generated and ground truth image. The loss used for the gradient backpropagation update of both networks is based on the quality of the discriminators ability to classify the artificial and true image in which the generator is greater penalized when the discriminator accurately differentiates the two images, and

similarly, the discriminator has a larger loss when incorrectly identifying real from fabricated images. The generator is then considered to have converged when the discriminator predicts both generated and true images with equal probability. For both discriminator and generator networks the activation functions used between layers is LeakyReLU and Sigmoid for the final layer [7]. Batch normalization is also performed between internal layers to minimize covariant shift of weight updates and improve learning for the deeper networks used [3].

4.3.1 Discriminator Network. For discriminating between artificial and ground truth image renderings a deep convolutional patchGAN network is used motivated by the added advantage of providing a patch-wise probability of an image in question as being real or fake. The benefit of a patch-wise probability allows for higher regional accuracy within an image as well as applicable for image-to-image tasks as introduced by Isola et. al. [4].

As input during training the discriminator network is given the set of conditional space buffers along with either the visualization generated by the cGAN generator network or the ground truth global illumination rendering produced with the VTK-m path tracer. Taking into account the conditional buffers the discriminator attempts to provide the rendered image as artificial, e.g. generated by the adversarial network, or real. Based on the performance of the discriminator the loss is computed using the classic loss for GAN training along with an L1 loss in order to not only produce original content but to also preserve structure and light information [5]. Training is complete, and the generator has converged, when the discriminator predicts real from fake images with a 50-50 percent chance. At this point the discriminator network is discarded and the resulting generator affords a real-time visualization tool able to produce accurate global illumination given conditional geometric buffers.

4.3.2 Generator Network. The generative network used is a deep convolutional network consisting of an encoder and decoder with skip connections concatenating equal depth layers of the encoding and decoding stages. Due to the illustrative ‘shape’ of this design the network is denoted a U-Net as introduced by Ronneberger et. al. for medical segmentation [10]. The motivation for utilizing a U-Net is due to success of the skip connections linking the decoded convolutional process to the encoded deconvolutional in capturing geometric and spatial attributes. The generator retrieves as input through Adios global illumination buffers saved to file once rendered with VTK-m.

4.4 Core Design Pattern

For our PyTorch in situ proposal current systems we rely on are VTK-m for rendering path traced images and conditional geometry buffers focus and employ Adios2 for data management.

4.4.1 VTK-m Data Generation and Adios2 Data Transport.

Path traced images are maintained within C++11 as VTK-m

arrays which can be passed by reference directly to PyTorch using Adios2 APIs or written to Adios2 bp file and later retrieved during the dataloading step when training or utilizing the neural network.

4.4.2 PyTorch Design. For training, our solution used by the cGAN is “AdiosDataLoader”, a data class inheriting from the abstract indexing class PyTorch *torch.utils.data.Dataset*. The *AdiosDataLoader* employs Adios2 to either retrieve from file or have passed by reference vector representations of path traced images and conditional buffers. Within VTK-m during generation these vectors represented as VTK-m vectors and within PyTorch as numpy arrays. In this manner the training or test sets needed by PyTorch and created by VTK-m are available to PyTorch in situ or with reference to written memory. If retrieving VTK-m’s renderings PyTorch will compile Adios2 attributes from file as tabled by Adios2 into .bp files. Datasets can be retrieved with *read_adios_bp()* and subsequently partitioned into training, testing and validation subsets with our *get_split()* method into 60% training images, 20% validation images and 20% testing images. The split datasets are then used in *AdiosDataLoader* to instantiate the *torch.utils.data.DataLoader* thereby providing a data sampler to our VTK-m renderings affording single or multi-process iterators over the dataset, allowing us to train our neural networks in the canonical manner.

```
# PyTorch imports
import torch
import torch.nn as nn
import torch.optim as optim
from torch.utils.data import DataLoader
from torch.autograd import Variable

# Our model and solution imports
from model import G, D
from data import AdiosDataLoader

# Partition VTK-m rendered images and buffers
train_set = AdiosDataLoader(dataset, split="train")
val_set = AdiosDataLoader(dataset, split="val")
test_set = AdiosDataLoader(dataset, split="test")
# instantiate PyTorch dataloaders with AdiosDataLoader
train_data = DataLoader(dataset=train_set, num_workers=...,
                        batch_size=..., shuffle=True)
val_data = DataLoader(dataset=val_set, num_workers=...,
                    batch_size=..., shuffle=False)
test_data = DataLoader(dataset=test_set, ...)
# cast loaded VTK-m data to PyTorch tensors
gt, direct = torch.FloatTensor(train_batch_size,
                                n_channel_input, 256, 256, ...)
albedo, depth, normal = torch.FloatTensor(...), ..., ...
# ground truth labels
label = torch.FloatTensor(train_batch_size)
# instantiate generator and discriminator
netG = G(n_channel_input*4, n_channel_output,
        n_generator_filters)
netD = D(n_channel_input*4, n_channel_output,
```

```

393         n_discriminator_filters)
394 # Assign to GPU
395 netD, netG = netD.cuda(), netG.cuda()
396 # Loss functions:
397 # Binary Cross Entropy and L1 loss
398 criterion, criterion_l1 = nn.BCELoss(), nn.L1Loss()
399 # Cuda placement
400 criterion = criterion.cuda()
401 criterion_l1 = criterion_l1.cuda()
402 albedo = albedo.cuda()
403 gt, direct = gt.cuda(), direct.cuda()
404 depth, normal = depth.cuda(), normal.cuda()
405 label = label.cuda()
406 # Instantiate PyTorch variables of VTK-m renderings
407 albedo = Variable(albedo)
408 gt, direct = Variable(gt), Variable(direct)
409 depth, normal = Variable(depth), Variable(normal)
410 label = Variable(label)
411 # instantiate PyTorch Adam gradient decent
412 optimizerD = optim.Adam(netD.parameters(),
413                          lr=..., betas=...)
414 optimizerG = optim.Adam(netG.parameters(),
415                          lr=..., betas=...)
416 def train(epoch):
417     for (i, images) in enumerate(train_data):
418         netD.zero_grad()
419         ...

```

In the above code sample the *AdiosDataLoader* class is used to partition the data set into training, validation and testing as well as offer a distributable data sampler with list-like access with `__getitem__(index)` and size functionality.

```

427 # PyTorch imports
428 import torch.utils.data as data
429 # System imports
430 from os import listdir
431 from os.path import join
432 # Our solution imports
433 import read_adios_bp
434 import get_split
435
436 class AdiosDataLoader(data.Dataset):
437     #split can be 'train', 'val', and 'test'
438     def __init__(self, image_dir, split = 'train'):
439         super(AdiosDataLoader, self).__init__()
440         self.data_path = join(image_dir, "data.bp")
441         self.width, self.height = 256, 256
442         self.samplecount = 1024
443
444         self.data = read_adios_bp(self.data_path
445                                 ,conditional="path_traced"
446                                 ,width=self.width
447                                 ,height=self.height
448                                 ,sc=self.samplecount)

```

```

#collect adios var (image) names
self.filenamees = self.data[0]

# name to data sample dictionary
self.name_to_data = self.data[1]

# partition training, testing and validation set
self.split_filenames = get_split(self.filenamees,
                                split)


def __getitem__(self, index):
    name = self.split_filenames[index]
    data_sample = self.name_to_data[name]
    return data_sample

def __len__(self):
    return len(self.split_filenames)

```

5 CORNELL BOX EXPERIMENT

To evaluate the quality of in situ deep learning aided visualizations train the cGAN networks on rendered images of a Cornell box, a commonly used 3D modeling framework for quality assesment. We train the model using renderings of the Cornell box with high light sample count and depth computation per ray for various camera angle perspectives into the box along with the associated image geometry buffers for a given camera orientation. We then assess the quality of the mdoels final generated renderings looking at the accuracy of global illumination. We then also demonstrate the performance of the models ability to render global illuminatio when given image buffers for a novel scene not used for training similar in content but not exact. The scene used for training is comprised of the classic set up with one overhead light source in the center of a white ceiling, a white back wall and a white floor. The remaining walls are then colored red on the left and green on the right in order to afford different colored light transport amd demonstrate diffuse interreflection. The contents of the Cornell box are three cuboids of various shapes and sizes to provide diverse shading and diffused lighting.



The conditional differed shading geometry buffers used are direct lighting, normal planes, depth and albedo as shown in figure 1. The geometry buffers serve as joint variables for the conditional probability distribution which the global

illumination path traced images are considered to exist. The conditional arguments in this experiment then aid the cGAN in learning behaviour of light paths given the geometry of a scene in question.

6 RESULTS

6.1 Cornell Box Experiment Results

The resulting generated images show promising results for deep learning aided in situ scientific visualisation. We observe the network successfully learned to emulate light transport in a realistic fashion with offline performance **EXAMPLE**. What is more, though designed in a “one network for one scene” setting, the generative net proved to be adaptive and able to generate accurate renderings for not only unobserved camera orientation renderings during training but also varied scenes of a similar flavor when provided the conditional geometry buffers of the novel scene.

6.2 Solution Design Assessment

7 CONCLUSIONS

ACKNOWLEDGMENTS

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document.

REFERENCES

- [1] Ken Dahm and Alexander Keller. 2017. Learning light transport the reinforced way. *arXiv preprint arXiv:1701.07403* (2017).
- [2] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. 2014. Generative adversarial nets. *Advances in Neural Information Processing Systems*. (2014).
- [3] Sergey Ioffe and Christian Szegedy. 2015. Batch normalization: Accelerating deep network training by reducing internal covariate shift. *arXiv preprint arXiv:1502.03167* (2015).
- [4] Phillip Isola, Jun-Yan Zhu, Tinghui Zhou, and Alexei A Efros. 2017. Image-to-image translation with conditional adversarial networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 1125–1134.
- [5] Phillip Isola, Jun-Yan Zhu, Tinghui Zhou, and Alexei A Efros. 2017. Image-to-image translation with conditional adversarial networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 1125–1134.
- [6] Anton Kaplanyan and Carsten Dachsbacher. 2010. Cascaded light propagation volumes for real-time indirect illumination. In *Proceedings of the 2010 ACM SIGGRAPH symposium on Interactive 3D Graphics and Games*. ACM, 99–107.
- [7] Andrew L Maas, Awni Y Hannun, and Andrew Y Ng. 2013. Rectifier nonlinearities improve neural network acoustic models. In *Proc. icml*, Vol. 30. 3.
- [8] Mehdi Mirza and Simon Osindero. 2014. Conditional generative adversarial nets. *arXiv preprint arXiv:1411.1784* (2014).
- [9] Kenneth Moreland, Christopher Sewell, William Usher, Li-ta Lo, Jeremy Meredith, David Pugmire, James Kress, Hendrik Schroots, Kwan-Liu Ma, Hank Childs, et al. 2016. Vtk-m: Accelerating the visualization toolkit for massively threaded architectures. *IEEE computer graphics and applications* 36, 3 (2016), 48–58.
- [10] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. 2015. U-net: Convolutional networks for biomedical image segmentation. In *International Conference on Medical image computing and computer-assisted intervention*. Springer, 234–241.

- [11] Peter-Pike Sloan, Jan Kautz, and John Snyder. 2002. Precomputed radiance transfer for real-time rendering in dynamic, low-frequency lighting environments. In *ACM Transactions on Graphics (TOG)*, Vol. 21. ACM, 527–536.
- [12] Manu Mathew Thomas and Angus G Forbes. 2017. Deep Illumination: Approximating Dynamic Global Illumination with Generative Adversarial Network. *arXiv preprint arXiv:1710.09834* (2017).