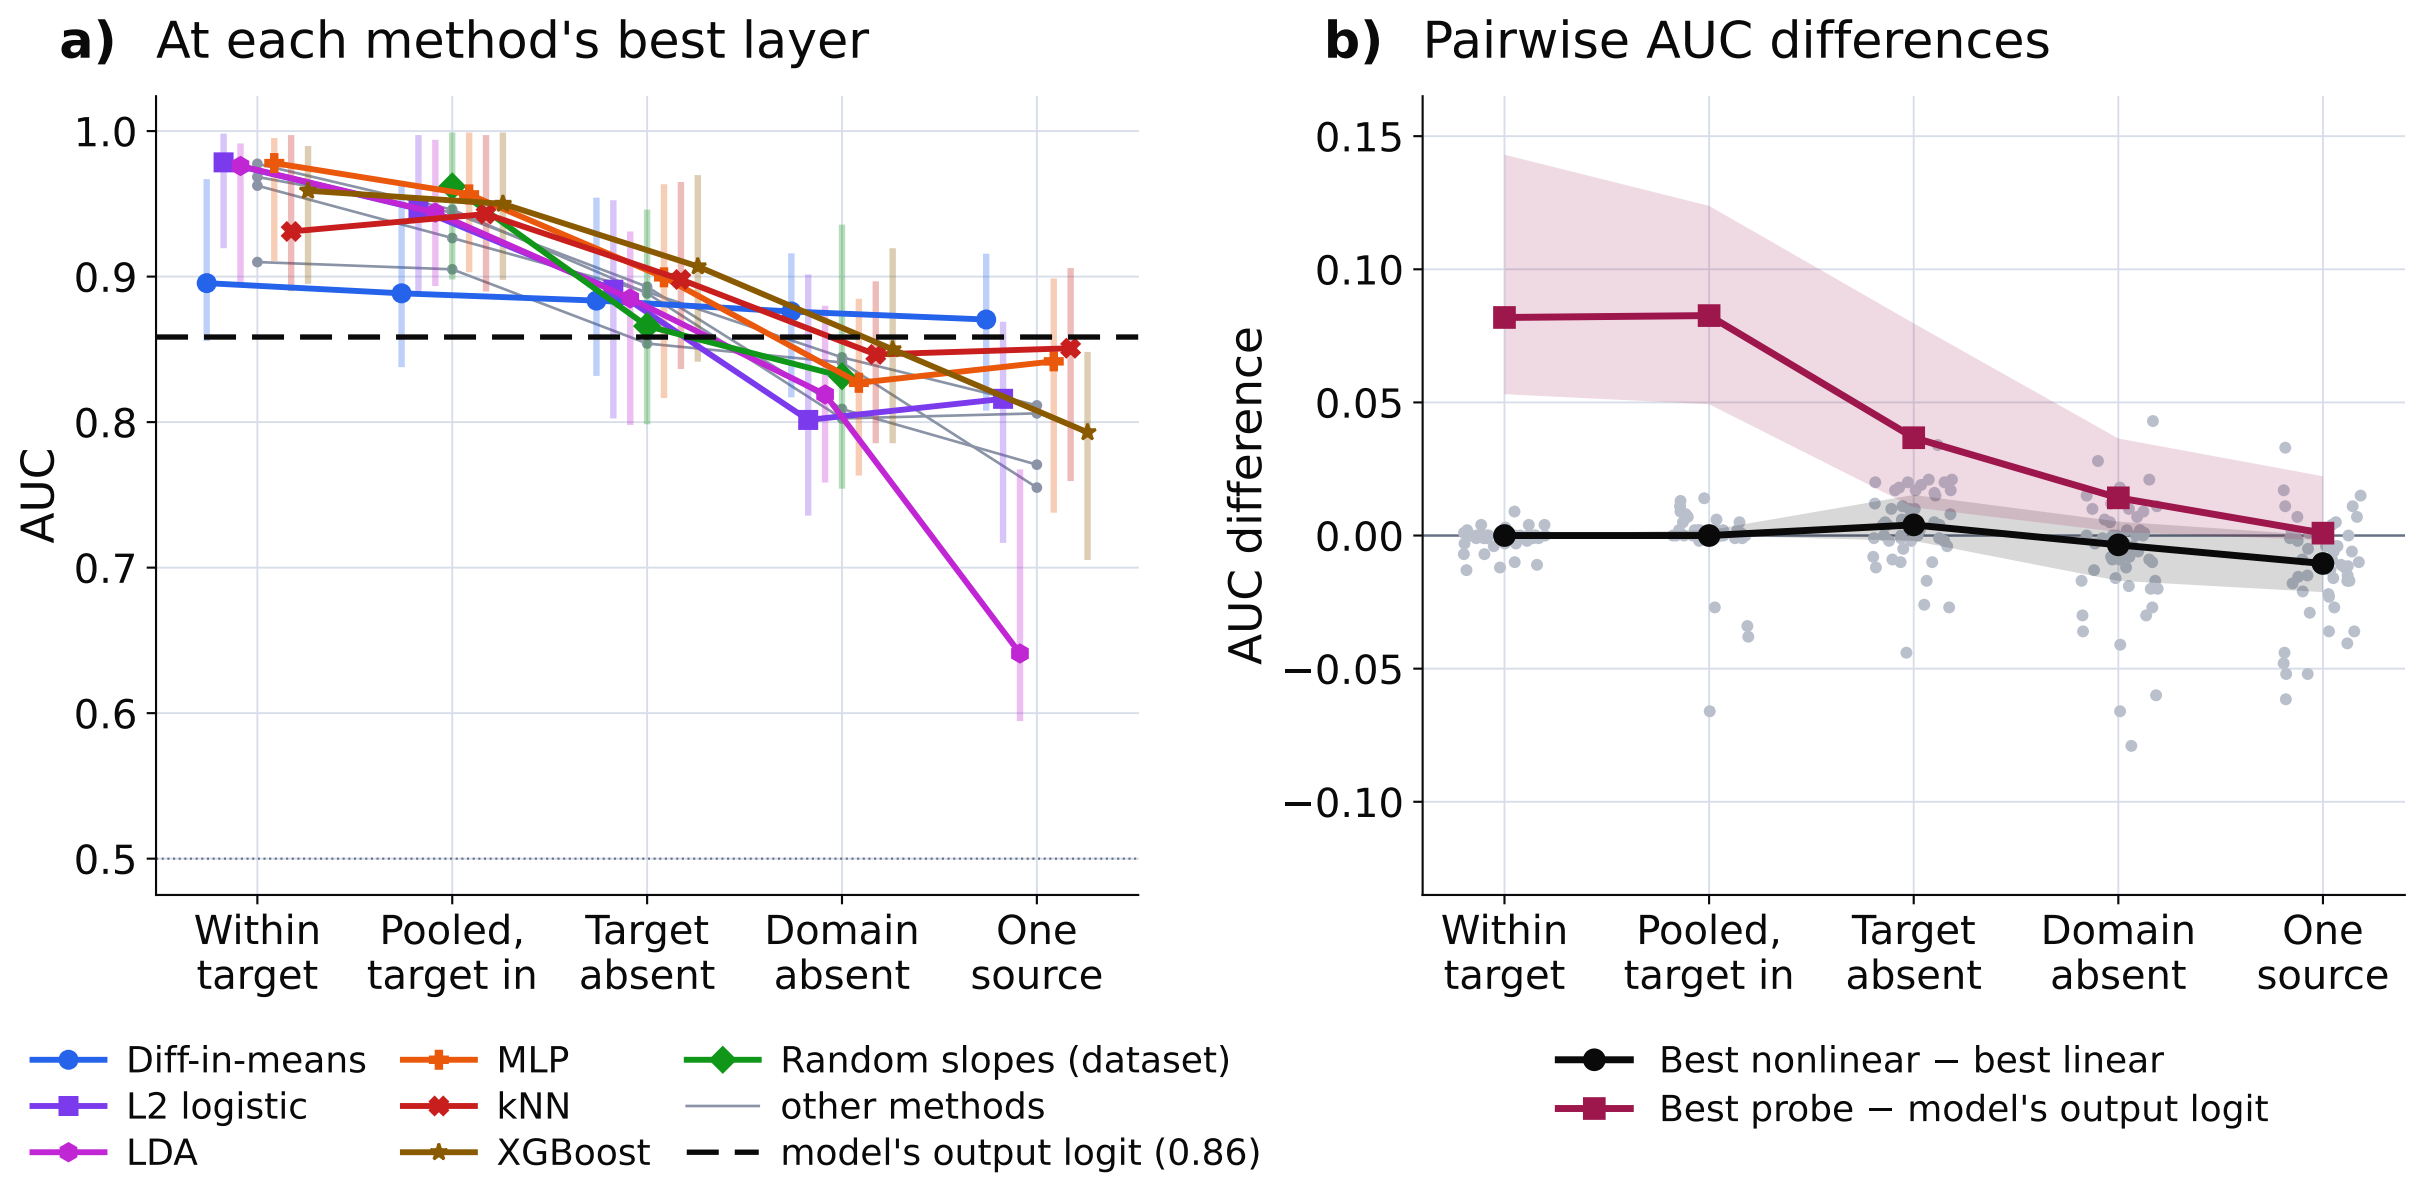
a) At each method's best layer
AUC
1.0
0.9
0.8
0.7
0.6
0.5
Within target
Pooled, target in
Target absent
Domain absent
One source
b) Pairwise AUC differences
AUC difference
0.15
0.10
0.05
0.00
−0.05
−0.10
Within target
Pooled, target in
Target absent
Domain absent
One source
Diff-in-means
L2 logistic
LDA
MLP
kNN
XGBoost
Random slopes (dataset)
other methods
model's output logit (0.86)
Best nonlinear − best linear
Best probe − model's output logit