Suggestion: As UML diagram format, the method frame should identify an input arguments within the label. This would make it clear to when programming the required inputs as shown in the first dispatch arrow.


Feedback: Unclear if this life line represents an object or role. Typically using :Obj represents an object of the NetworkLoop which can be further clarified by underlining.

Suggestion: Including an actor in this sequence diagram would be an addition that needs to be added for the following reasons:

1. Adding actor increases the readability, helping programmers and production team to identify the user that interacts with this diagram. These indicate the limits of the diagram and which user is able to access the said methods.

2. Indicate the dependencies the diagram requires, and which users can execute the flow of the sequence. Without this it would be unclear when and how the described method will be dispatched.

3. Connecting the sequence diagram with its corresponding use case actor would enable a seamless flow of details. Readers can read use case diagrams and seek sequence diagrams for greater insight.

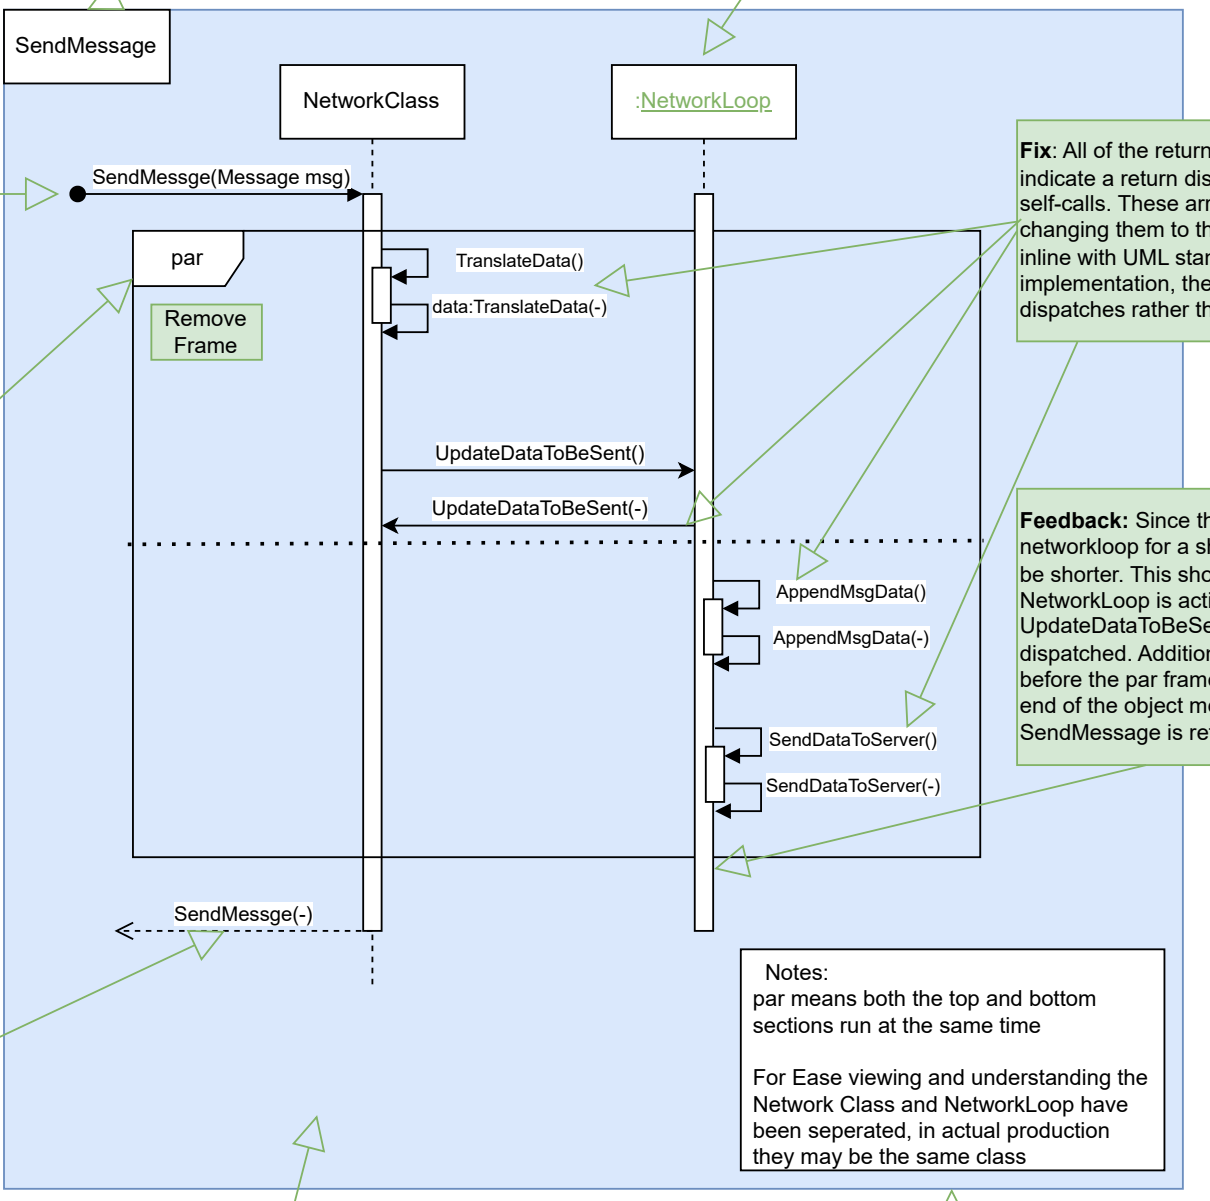

Fix: All of the return arrows must be dashed to indicate a return dispatched is being sent, including self-calls. These arrows need to be fixed by changing them to their appropriate format to be inline with UML standards. Without this implementation, the return arrows are shown as dispatches rather than their intended purpose.

Feedback: While the par frame is useful for showing processes that run parallel to one another, here it is not used as intended. The UpdateDataToBeSent() is the trigger for AppendMsgData() and SendDatatoServer() which require the data to be sent first. Therefore here it would better to remove a par frame since these processes are parallel rather require data to be sent in sequence.

Feedback: Since the NetworkClass depends on the networkloop for a short duration, the life line must be shorter. This should be done to indicate that the NetworkLoop is active for the duration of the UpdateDataToBeSent() not before the message is dispatched. Additionally, the NetworkLoop must end before the par frame is terminated to indicate the end of the object methods, and that the SendMessage is returned.

Suggestion: It is unclear the return type of SendMessage, and it would be difficult to understand the context of SendMessage without having a return type.

Possible Return Types:

1. Boolean: This would indicate whether the message has been sent successful, possibly being used as a flag to throw exceptions.

2. **Void:** This would indicate the message completes the required processes without indicating to user, and where system interrupts are done through exceptions.

3. **Enum:** Can be used similar to other class elements in the structure diagram which sets a enum to the message, and returns the enum as a message. This enum can be used to handle exceptions and indicate to user the specific error.

Comment: Background colour is a good addition to the diagram as it helps to define and put emphasis on key details of the diagram.

Suggestion: Place this in the top right corner before the user begins reading. This helps with the flow of the diagram since the user is equipped with the information before beginning to read.

Comment: This notes section is useful for reading the diagram, traditionally the par (standing for *parallel*) is not used and serves to inform the readers. Description is a great addition to the diagram to indicate a short summary of the information.