

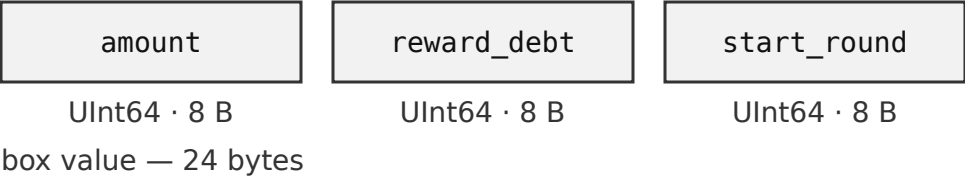


One box per staker, holding one packed struct.

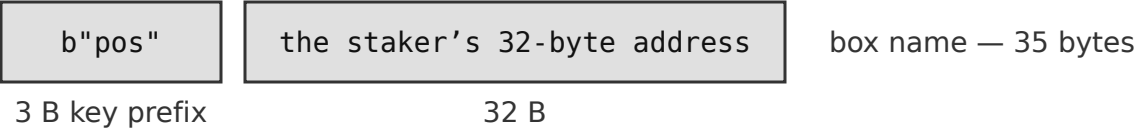

$2,500 + 400 \times (35 + 24) = 26,100 \mu A$

The same three numbers in three boxes, one per field.

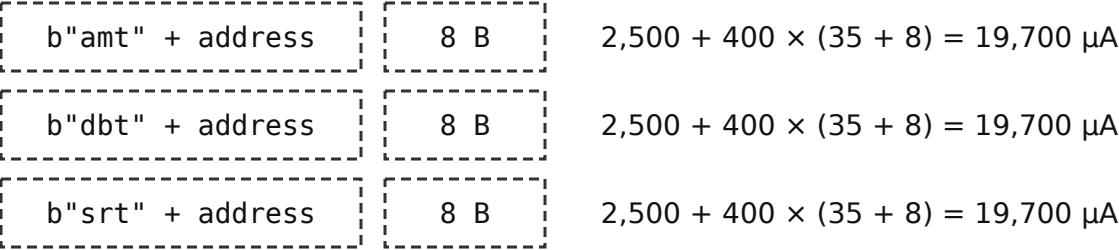

59,100 μA — 2.26× the packed layout

for exactly the same 24 bytes of data.

The address is stored three times, and the flat 2,500 μA is charged three times. Neither of those buys any storage — the payload is identical.

So: pack the fields that are read together into one box, and keep the key prefix short. Every character of it is another 400 μA on every single box in the map, paid for as long as the box exists.