


1 · The signature is hashed. The first four bytes are the selector.




2 · What actually travels: the app-args array.

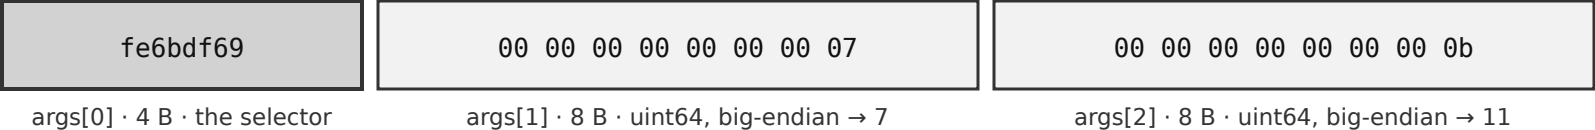

Sixteen slots, and the selector takes one. A method with more than fifteen arguments has its tail packed into a tuple in the last slot.

3 · The return value comes back as a log entry, behind its own four-byte prefix.

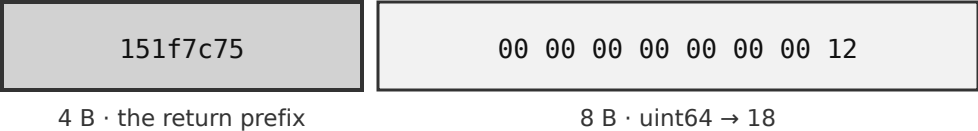

The same prefix on every ABI method in every contract. It is how a client tells a return value from an ordinary log line.

A dynamic type carries its own length. `arc4.String("hi")` on the wire:



A fixed-size type has no length prefix, because the ABI already knows how wide it is. That is the whole difference, and it is why a tuple of dynamic types needs offsets.