

# **Modula-2 Revision 2010**

Language Report for the  
Bootstrap Kernel Subset (BSK)

Benjamin Kowarsch and Rick Sutcliffe

July 2020

# Status of Work

This page is **not** part of the (final) document.

**Date of this draft:** 31 July 2020

## Design Status

**Language:** COMPLETE & FINAL

**Library:** COMPLETE & FINAL

**IO Library:** COMPLETE & FINAL, subject to review of IO format specifiers

Complete and final status notwithstanding any potential corrections of possible errors.

## Remaining Work

### Content

#### Appendices

- Review IO format specifiers

#### Still Missing?

Check and add if missing

- There are incomplete headings for some (shared) syntax diagrams

### Formatting

- Use LaTeX titling package to define fonts/styles for headings
- Change `\rmfamily` back to proper roman font when done

### Decisions

- Table captions do not seem to have any informational value, remove/rewrite them?
- Some content might be moved between appendix and supplementary material section.

### Table of Contents

This language report constitutes part 2 of the final book. It does not have a **separate** TOC nor index.

A **combined** TOC and index will be compiled when the introductory/explanatory part 1 has been completed.

# Font Test Page

This page is **not** part of the (final) document.

def This is a definition.

- This is a bullet list item.
- This is another bullet list item.

## Roman Font

roman (ec-qagr)

abcdefghijklmnopqrstuvwxyz  
ABCDEFGHIJKLMNOPQRSTUVWXYZ  
0123456789 !"#%&'()\*+,-./:;<=>? @[\]^\_`{|}~

## Alternate Roman Font

alt roman (ec-qcsr)

abcdefghijklmnopqrstuvwxyz  
ABCDEFGHIJKLMNOPQRSTUVWXYZ  
0123456789 !"#%&'()\*+,-./:;<=>? @[\]^\_`{|}~

## Sans Serif Font

sans serif (phvr8t at 8.50006pt)

abcdefghijklmnopqrstuvwxyz  
ABCDEFGHIJKLMNOPQRSTUVWXYZ  
0123456789 !"#%&'()\*+,-./:;<=>? @[\]^\_`{|}~

## Monospace Font

monospaced (FiraMono-Regular-tlf-t1 at 6.99997pt)

abcdefghijklmnopqrstuvwxyz  
ABCDEFGHIJKLMNOPQRSTUVWXYZ  
0123456789 !"#%&'()\*+,-./:;<=>? @[\]^\_`{|}~

# Typography

The following typographic conventions are used throughout this document:

## Body Text

Conventions used within body text

Sample	Typeface	Usage
All imports are qualified	sans serif	represents body text
Pragmas may <b>not</b> be nested	sans serif bold	represents emphasis in body text
<i>cardinality</i> or value count	roman bold italic	represents defined reference terms
Type <code>CHAR</code> is a character type	monospaced	represents inline source code
<code>def</code> $\frac{x}{y} = x - \textit{int } x$	framed box “def”	represents a definition
where $\tau_1, \tau_2 \in \tau_{cardinal}$	math font	represents inline math formulas

## Grammar

Conventions used within EBNF grammar listings

Sample	Typeface	Usage
statementSeq	monospaced	symbols, operators, punctuation, literals
<b>identList</b> := ...	monospaced bold	definition of a terminal or non-terminal
<b>MODULE</b> ident ';' '	monospaced bold grey	reserved words of Modula-2
<i>/* whitespace */</i>	monospaced italic grey	comments

## Source Code

Conventions used within Modula-2 source code listings

Sample	Typeface	Usage
a := b + c;	monospaced	symbols, operators, punctuation, literals
<b>VAR</b> ch : CHAR;	monospaced bold	reserved words of Modula-2
<i>(* whitespace *)</i>	monospaced italic grey	comments
<b>&lt;*FFI="C"&gt;</b>	monospaced bold grey	pragmas

# Syntax Notation

An Extended Backus-Naur Formalism (EBNF) variant is used throughout this document to specify syntax. The specifics of this EBNF are specified below.

## Syntax

```
/** non-terminals */
grammar := ( definition ';' )+ ;
definition := symbolDef | aliasDef ;
symbolDef := Ident ':' expression | literal ;
expression := term+ ( '|' term+ )* ;
term := factor ( '*' | '+' | '?' )? ;
factor := Ident | literal | '(' expression ')' ;
literal := charOrRange | quotedCharOrRange | QuotedCharSeq ;
charOrRange := 'ASCII(' Number ( '..' Number )? ')';
quotedCharOrRange := QuotedChar ( '..' QuotedChar )? ;
aliasDef := 'alias' Ident '=' Ident ;

/** terminals */
Ident := TerminalIdent | NonTerminalIdent ;
TerminalIdent := ( 'A' .. 'Z' ) Letter* ;
NonTerminalIdent := ( 'a' .. 'z' ) Letter* ;
Letter := ( 'a' .. 'z' ) | ( 'A' .. 'Z' ) ;
QuotedLetter := '"' Letter '"' | "'" Letter "'" ;
QuotedChar := '"' PrintableChar '"' | "'" PrintableChar "'" ;
QuotedCharSeq := '"' PrintableChar+ '"' | "'" PrintableChar+ "'" ;
PrintableChar := ASCII(0x20..0x7E) ;
Number := Digit+ | '0x' ( Digit | 'A' .. 'F' )+ ;
Digit := '0' .. '9' ;

/** non-semantic symbols */
Whitespace := ASCII(0x20) ;
Comment := '/' PrintableChar* '/' ;
```

## Semantics

Syntax	Position	Sample	Meaning	Precedence
	infix	t1   t2	alternative terms t1 and t2	(lowest) 1
?	postfix	t?	optional term t	2
+	postfix	t+	arbitrary repetition of a mandatory term t	2
*	postfix	t*	arbitrary repetition of an optional term t	2
( )	enclosure	( t1 t2 t3 )	precedence grouping of enclosed terms	(highest) 3

# Math Notation

The following math symbols are used throughout this document:

## General

Symbol	Meaning	Pronounced as
$\xrightarrow{def}$	Definition	defines
$\in$	Type Membership	is of type
$\Gamma_t \vdash s$	Type regime assertion	$s$ is true under type regime $t$

## Type Relations

Symbol	Meaning	Pronounced as
$\equiv$	Identity	is identical to
$\doteq$	Canonical Identity	is canonically identical to
$\cong$	Structural Equivalence	is structurally equivalent to
$<$	Subtype	is subtype of
$>$	Extension	is extension of

## Type Compatibility

Symbol	Meaning	Pronounced as
$\xrightarrow{:=}$	Assignment Compatibility	is assignment compatible to
$\xrightarrow{copy}$	Copy Compatibility	is copy compatible to
$\xrightarrow{val}$	By-Value Passing Compatibility	is by-value passing compatible to
$\xrightarrow{ref}$	By-Reference Passing Compatibility	is by-reference passing compatible to
$\xleftrightarrow{expr}$	Expression Compatibility	is expression compatible with

# Chapter 1

## Lexical Entities

### 1.1 Reserved Words

#### 1.1.1 Classical Tokens

ALIAS , AND , ARGLIST , ARRAY , BEGIN , CASE , CONST , COPY , DEFINITION , DIV , DO , ELSE , ELSIF ,  
END , EXIT , FOR , IF , IMPLEMENTATION , IMPORT , IN , LOOP , MOD , MODULE , NEW , NOP , NOT , OCTETSEQ ,  
OF , OPAQUE , OR , POINTER , PROCEDURE , READ , RECORD , RELEASE , REPEAT , RETAIN , RETURN , SET ,  
THEN , TO , TYPE , UNTIL , VAR , WHILE , WRITE .

#### 1.1.2 Schroedinger's Tokens

Tokens that may represent a reserved word or an identifier. The ambiguity is resolved during syntax analysis.

ADDRESS , CAPACITY , CAST , NIL .

### 1.2 Special Symbols

#### 1.2.1 Delimiters

( ) [ ] { } ' "

#### 1.2.2 Punctuation

. , : ; = + \* @ | .. := ++ -- .\*

#### 1.2.3 Operators

= # < <= > >= + - & \ \* / :: ^ .

#### 1.2.4 Comment Delimiters

! ( \* \*)

#### 1.2.5 Pragma Delimiters

<\* \*>

### 1.3 Identifiers

Identifiers denote predefined or user defined names for syntactic entities. A standard identifier starts with a letter and may be followed by letters and digits.

```
StdIdent := Letter ( Letter | Digit )* ;
```

## 1.4 Numeric Literals

Numeric literals denote numeric values, either real number values, whole number values or character code values.

### 1.4.1 Real Numbers

Real number values are always given in decimal notation, start with an *integral part*, followed by a *fractional part*, followed by an optional exponent.

```
RealNumber := integralPart fractionalPart exponentialPart? ;
integralPart := '0' | ( '1' .. '9' ) ( DigitSeparator? DigitSequence )? ;
fractionalPart := '.' DigitSequence ;
exponent := 'e' ( '+' | '-' )? DigitSequence ;
DigitSequence := DecimalNumber ;
```

### 1.4.2 Whole Numbers

Whole number values may be given in decimal, radix-2 or radix-16 notation. C-style prefixes are used to indicate the radix of non-decimal literals. Prefix `0b` indicates radix-2 and prefix `0x` indicates radix-16. Digits may be grouped using `'` as a digit separator. A digit separator must always be preceded and followed by a digit.

```
WholeNumber := DecimalNumber | Base2Number | Base16Number ;
DecimalNumber := Digit+ ( DigitSeparator Digit+ )* ;
Base2Number := '0b' Base2Digit+ ( DigitSeparator Base2Digit+ )* ;
Base16Number := '0x' Base16Digit+ ( DigitSeparator Base16Digit+ )* ;
Digit := '0' .. '9' ;
Base2Digit := '0' | '1' ;
Base16Digit := Digit | 'A' .. 'F' ;
alias DigitSeparator = "'";
```

### 1.4.3 Character Codes

Character code values are always given in radix-16 notation with prefix `0u`.

```
CharacterCode := '0u' Base16Digit+ ( DigitSeparator Base16Digit+ )* ;
```

## 1.5 Quoted Literals

Quoted literals denote text. They are delimited by single quotes `'` or double quotes `"`.

```
QuotedLiteral := SingleQuotedLiteral | DoubleQuotedLiteral ;
```

A single quoted literal may contain double quotes but not single quotes. A double quoted literal may contain single quotes but not double quotes. A quoted literal may contain whitespace but **no** tabulator, **no** newline, nor any other control codes. As a result, it may **not** span multiple lines.

```
SingleQuotedLiteral := "'" ( AnyPrintableExceptSingleQuote | EscSeq )* "'" ;
DoubleQuotedLiteral := '"' ( AnyPrintableExceptDoubleQuote | EscSeq )* '"' ;
```

Backslash escape sequences may be used to denote newline and tabulator within a quoted literal. Escape sequence `\n` denotes newline and `\t` denotes tabulator. A verbatim backslash must be escaped as `\\`. No other escape sequences shall be supported.

```
EscSeq := '\' ( 'n' | 't' | '\' ) ;
```



## 1.6 Non-Semantic Entities

### 1.6.1 Whitespace

Whitespace `ASCII(0x20)` terminates a symbol, except within quoted literals, pragmas and comments.

### 1.6.2 Tabulator

Tabulator `ASCII(0x09)` terminates a symbol, except within pragmas and comments.

### 1.6.3 Newline

Newline terminates a symbol, except pragmas and block comments. A newline increments the line counter and resets the column counter used in compile-time messages.

```
Newline := ASCII(0x0A) | ASCII(0x0D) ( ASCII(0x0A) )? ;
```

## 1.7 Comments

Comments are non-semantic symbols ignored by the language processor. They may occur anywhere before or after semantic symbols and are used for documentation and annotation. There are line and block comments.

### 1.7.1 Line Comments

Line comments start with a `!` and are terminated by newline.

```
LineComment := '!' ( AnyPrintable | Tabulator )* Newline ;
```

### 1.7.2 Block Comments

Block comments are delimited by block comment delimiters `(*` and `*)`. Block comments may span multiple lines and may be nested up to a maximum of nine levels, not counting the outermost comment.

```
BlockComment := '(*' ( BlockComment | AnyPrintable | Tabulator | Newline )* '*)' ;
```

## 1.8 Pragmas

Pragmas are directives to the language processor to control or influence the compilation process. They are delimited by delimiters `<*` and `*>`, may span multiple lines but may **not** be nested.

```
Pragma := '<*' PragmaBody '*>' ;
```

## 1.9 Other Symbols

The following symbols are reserved for language extensions:

- the backquote is reserved for use by Objective Modula-2
- the percent sign is reserved for conditional compilation/expansion
- the dollar and lowline are reserved for use within foreign identifiers (optional)

The following symbols are reserved for use by external source code processors:

- the question mark is reserved for use by debugging aids, editors and filter programs
- `/*`, `*/`, `<#`, `#>`, `(%` and `%)` are reserved for use by the Modula-2 template engine

# Chapter 2

## Compilation Units and Scopes

### 2.1 Compilation Units

Modula-2 programs and libraries consist of one or more compilation units called modules. A program consists of exactly one program `MODULE` and any number of library modules. A library module consists of a definition part, called a `DEFINITION MODULE`, and an optional implementation part, called an `IMPLEMENTATION MODULE`. The definition part defines the client interface of the library. The implementation part implements the library according to the interface. The implementation part is strictly accessible through its definition part only.

### 2.2 Identifier Visibility

Identifiers that are predefined by the language are pervasive, that is, they are visible in every scope without import. Identifiers provided by a special built-in module are visible only within a scope into which they are explicitly imported. Identifiers defined within a definition module are visible within the definition module in which they are defined, within the corresponding implementation module and any scope into which they are imported. Identifiers declared within an implementation or program module are visible only within the scope in which they are declared.

#### 2.2.1 Visibility of Constants and Aliases

Constants and aliases are visible in the scope in which they are defined or declared from the point forward where they are defined or declared. That is, they must be defined or declared before they are referenced.

#### 2.2.2 Visibility of Types, Procedures and Variables

Types, procedures and variables are visible in the entire scope in which they are defined or declared. That is, they may be referenced before they are defined or declared.

### 2.3 Scope

Scope is a measure of the visibility of identifiers. There are three levels of scope. Global scope, module scope and local scope. Module scope is a sub-scope of global scope and local scope is a sub-scope of module scope.

#### 2.3.1 Global Scope

Global scope encompasses an entire program. Only predefined identifiers have global scope.

#### 2.3.2 Module Scope

Module scope encompasses a module. Identifiers that are defined or declared in, or imported into the top level of a module have module scope. Module scopes may not be nested.

### 2.3.3 Local Scope

Local scope encompasses a `PROCEDURE` declaration or a `FOR` statement. Identifiers defined or declared within a procedure or the header of a `FOR` statement have local scope. Local scopes may be nested. The surrounding scope in which a local scope is nested is called the outer scope. The nested scope is called the inner scope.

Identifiers defined or declared in an outer scope are also visible in an inner scope and may be redefined within the inner scope. Redefining an identifier of an outer scope within an inner scope causes the entity denoted by the identifier to be shadowed. A shadowed entity is no longer addressable through its identifier within the scope in which it has been shadowed and within any of its sub-scopes. Identifiers that belong only to an inner scope are visible only in the inner scope and any of its sub-scopes but not in any outer scope.

#### 2.3.3.1 Procedure Scope

Procedure scope is created by a `PROCEDURE` declaration.

Procedure scope overlaps with the outer scope of the procedure. The outer scope extends to the end of the procedure header and continues after the end of the procedure body. The inner scope extends from the beginning of the procedure header to the end of the procedure body. The procedure header thus belongs to both the outer and the inner scope.

The procedure's identifier is visible in both the outer and the inner scope. It may be referenced in either scope and may not be redefined in either scope. The identifiers of a procedure's formal parameters exist in both the outer and the inner scope but are visible only within the inner scope and may not be redefined therein.

#### 2.3.3.2 FOR Statement Scope

`FOR` statement scope is created by a `FOR` statement.

A `FOR` statement scope does not overlap with its outer scope. It extends from the beginning of the `FOR` statement's header to the end of its body. The loop variants declared within the loop header have local scope, they are only visible within the loop.

## 2.4 Import and Export

Identifiers defined within a definition module are automatically exported for import and use by client modules. By contrast, program and implementation modules do not export any identifiers. An `IMPORT` directive may be used within any kind of module to explicitly import the identifiers exported by definition modules. A definition module does not implicitly re-export imported identifiers.

```
IMPORT FooLib, BarLib, BazLib;
```

### 2.4.1 Duplicate Import

A duplicate import is an import of a library that has already been imported into the same scope. Any such import is ignored and will cause a compile time warning.

### 2.4.2 Qualified Import

All imports are qualified. That is, an imported identifier is referenced in the importing module by a qualified identifier. A qualified identifier consists of the module identifier, followed by a period, followed by the actual identifier. Qualification prevents name conflicts between identical identifiers in different libraries.

```
IMPORT Flintstones, Rubbles;
...
person := Flintstones.Fred;
person.spouse := Flintstones.Wilma;
person.friend := Rubbles.Barney;
person.friend.spouse := Rubbles.Betty;
```

### 2.4.3 Import Aggregation

Imported modules are not implicitly re-exported but they may be **explicitly** re-exported. Module identifiers to be imported for automatic re-export are marked with a re-export suffix `+`.

```
import := IMPORT libIdent reExport? ( ',' libIdent reExport? )* ';' ;
alias libIdent = StdIdent ;
alias reExport = '+' ;
```

A library module that imports other modules for the sole purpose of re-export is called an import aggregator. The facility is called import aggregation. It is useful for importing multiple libraries with a single import directive.

```
DEFINITION MODULE CharIO;
IMPORT SoleCharIO+, ArrayOfCharIO+;
END CharIO.
```

When a client module `M` imports an import aggregator `A` which imports and re-exports modules `B` and `C`, client module `M` then automatically imports modules `B` and `C`.

```
IMPORT CharIO; VAR char : CHAR; str : ARRAY 10 OF CHAR;
...
WRITE "char: ", char; (* use of syntax bindings in SoleCharIO *)
WRITE "string: ", str; (* use of syntax bindings in ArrayOfCharIO *)
```

## 2.5 Abstract Data Type Libraries

An abstract data type library is a library that provides an abstract data type (ADT) whose identifier matches the identifier of its library module.

```
DEFINITION MODULE String;
TYPE String = OPAQUE;
```

The identifier of such an ADT is **implicitly** aliased when it is imported and may therefore be used unqualified.

```
IMPORT String;
VAR s : String; (* alias for String.String *)
```

An ADT library may provide syntax bindings (see chapter 10). Except for IO bindings, other libraries may not.

## 2.6 Institution

The introduction of a name along with an associated specification of an entity is called institution. There are two kinds:

- definition
- declaration

A definition is an institution of interface of an entity, a declaration is an institution of implementation. However, in the case of constants, variables and types other than **opaque types**, interface and implementation are inseparable. For this reason, by convention, any institution within the definition part of a library module is called a definition and any institution within the implementation part of a library module is called a declaration.

## Chapter 3

# Aliases, Constants and Variables

### 3.1 Aliases

An alias represents the unqualified name of a qualified identifier. The unqualified name is called alias and the qualified identifier it represents is called its translation. An alias may be instituted within implementation and program modules only. It is visible only within the scope in which it is declared and its translation must be visible within that scope. Aliases may be declared explicitly by name or implicitly by wildcard.\*

```
aliasDeclaration := namedAliasDecl | wildcardAliasDecl ;
```

#### 3.1.1 Named Alias Declaration

A named alias declaration specifies one or more aliases to be declared explicitly by their name. An alias declaration for a single alias specifies its translation explicitly. The alias must match the unqualified identifier of its translation. An alias declaration for multiple aliases specifies their translations implicitly by qualified wildcard.

```
namedAliasDecl := aliasName ( '=' qualifiedName | ( ',' aliasName ) * '=' qualifiedWildcard ) ;  
alias aliasName = StdIdent ;  
alias qualifiedName = qualident ;  
qualifiedWildcard := qualident '.*' ;
```

A declaration of the form

```
ALIAS Fred = Flintstone.Fred;
```

declares a single alias `Fred` to represent qualified identifier `Flintstone.Fred`.

A declaration of the form

```
ALIAS Fred, Wilma = Flintstone.*;
```

declares two aliases `Fred` and `Wilma` to represent `Flintstone.Fred` and `Flintstone.Wilma` respectively.

#### 3.1.2 Wildcard Alias Declaration

A wildcard alias declaration clause declares all aliases matching a qualified wildcard. The qualifying part of the qualified wildcard must reference an enumeration type.

```
wildcardAliasDecl := '*' '=' qualifiedWildcard ;
```

A wildcard alias declaration within the context and of the form

```
TYPE Colour = ( Red, Green, Blue );  
ALIAS * = Colour.*;
```

declares aliases for every value in enumeration type `Colour`. The resulting aliases are `Red`, `Green` and `Blue` representing `Colour.Red`, `Colour.Green` and `Colour.Blue` respectively.

---

\*This replaces unqualified import and the `WITH` statement of earlier versions of Modula-2.

### 3.1.3 Visibility of Aliases

Unlike unqualified names brought into scope by unqualified import in earlier Modula-2 versions, unqualified names declared by an alias declaration have local scope. They are only visible within the scope in which they are declared, reducing the likelihood of name collision when using unqualified names.

Given the type declaration

```
TYPE MsgType = ( Info, Warning, Error, Fatal );
```

the values of type `MsgType` are only visible by their qualified names.

An alias declaration within a local scope of the form

```
PROCEDURE EmitMsg ( type : MsgType; CONST text : ARRAY OF CHAR );
ALIAS * = MsgType.*;
BEGIN
  (* unqualified aliases for MsgType values are in scope here *)
END EmitMsg;
(* unqualified aliases for MsgType values are no longer in scope here *)
```

declares aliases `Info`, `Warning`, `Error` and `Fatal` within the local scope of procedure `EmitMsg`. The aliases are visible only within the scope of the procedure.

## 3.2 Constants

A constant is an identifier that represents an immutable value determined at compile time. Its value is specified by a **constant expression** in its institution clause. A constant may be instituted within definition, implementation and program modules.

```
constDefinition := CONST ident '=' constExpression ;
alias constDeclaration = constDefinition ;
```

The expression must be a **constant expression** and it may not be a module or type identifier.

## 3.3 Variables

A variable is a named reference to a mutable value. It is always associated with a type and may only hold values of its type. The type is specified in its institution clause and is immutable. A variable may be instituted within definition, implementation and program modules. The syntax of definition and declaration clauses differs slightly.

### 3.3.1 Variable Definition

A variable definition may define variables of named types only.

```
varDefinition := VAR ( identList ':' typeIdent ';' )+ ;
```

Variables defined in a definition module are always exported immutable. They are mutable within the corresponding implementation module but immutable in any other scope.

### 3.3.2 Variable Declaration

A variable declaration may declare variables of named or anonymous types.

```
varDeclaration := identList ':' ( typeIdent | arrayType | subrangeType | procedureType ) ;
```

### 3.3.3 Variable Initialisation

Variables of all **pointer types** are automatically initialised to hold the invalid pointer value `NIL`. Variables of other types are not initialised. Their values are undetermined after allocation and must be explicitly initialised by assignment at runtime.

# Chapter 4

## Types

A type is a classification of units of data that determines storage representation, value range and semantics. A type may be instituted within definition, implementation and program modules. The syntax of type definition and declaration clauses differs slightly.

### 4.1 Type Institution

#### 4.1.1 Type Definition

A type definition may specify any type constructor except the indeterminate type constructor.

```
typeDefClause := TYPE ( typeDefinition ';' )+ ;
typeDefinition := ident '=' ( OPAQUE | type ) ;
type := aliasType | derivedType | subrangeType | enumType |
       setType | arrayType | recordType | pointerType | procedureType ;
```

#### 4.1.2 Type Declaration

A type declaration may specify any type constructor except the `OPAQUE` type constructor.

```
typeDeclClause := TYPE ( typeDeclaration ';' )+ ;
typeDeclaration := ident '=' ( indeterminateType | type ) ;
```

### 4.2 Pointer Types

A *pointer type* is a reference type. Its values are references to instances of another type. The type it references is called its target type. The target type is specified within its institution clause.

```
pointerTypeInstitution := TYPE ident '=' POINTER TO typeIdent ;
```

An instance of a *pointer type* may store any reference to a value of the target type or the invalid pointer `NIL`.

### 4.3 Opaque Types

An *opaque type* is a *pointer type* whose name is public but whose target type is hidden. Its definition is placed in a definition module.

```
opaqueTypeDefinition := TYPE ident '=' OPAQUE ;
```

A matching declaration specifying the target type must be placed in the corresponding implementation module.

```
opaqueTypeCompletion := TYPE ident '=' POINTER TO ( targetTypeIdent | indeterminateTarget ) ;
```

where the type identifier in the definition matches that in the declaration.

## 4.4 Alias Types

An alias type is a synonym for another type. The type for which it is a synonym is called its base type.

```
aliasTypeInstitution := TYPE ident '=' ALIAS OF typeIdent ;
```

An alias type and its base type are identical and thus interchangeable.

## 4.5 Derived Types

A derived type is a derivative of another type. The type from which it is derived is called its base type.

```
derivedTypeInstitution := TYPE ident '=' typeIdent ;
```

The type obtains its properties from its base type, except for its identifier. It has the same semantics as its base type. However, a derived type and its base type are different types and the two are **not** interchangeable.

## 4.6 Subrange Types

A subrange type is a subtype of an ordinal type. The type of which it is a subtype is called its base type. A subrange type obtains its properties from its base type, except for its identifier and its value range. It has the same semantics as its base type. The value range of a subrange type is a subset, but not necessarily a strict subset of the value range of its base type.

```
subrangeTypeInstitution := TYPE ident '=' '[' lowerBound '..' upperBound ']' OF ordinalType ;  
alias lowerBound, upperBound = constExpression ;  
alias ordinalType = typeIdent ;
```

A subrange type is always upwards **compatible** with its base type, but a base type is not downwards **compatible** with its subtypes. This restriction exists because any value of a subrange type is always a legal value of its base type but a value of a base type is not necessarily a legal value of its subrange type.

## 4.7 Enumeration Types

An enumeration type is an ordinal type whose values are determined by an identifier list given in its institution clause.

```
enumTypeInstitution := TYPE ident '=' '(' ( '+' enumTypeToExtend ',' )? identList ')';  
alias enumTypeToExtend = typeIdent ;
```

The identifier list is automatically enumerated, that is, each identifier is assigned an enumeration value. The enumeration value assigned to the leftmost identifier is always zero. The enumeration value assigned to any following identifier is the enumeration value of its predecessor incremented by one.

A type institution clause of the form

```
TYPE Colour = ( Red, Green, Blue );
```

institutes an enumeration type `Colour` with three enumerated values `Red`, `Green` and `Blue` whose enumeration values are 0, 1 and 2 respectively.

The maximum number of values in an enumeration type is defined by constant `Impl.MaxEnumValues`. Its value is implementation defined but must not be less than 4096.

Enumerated values must generally be qualified by their type identifier to avoid name conflicts. However, they may be referenced unqualified in an assignment to a designator whose type matches the enumeration type.

```
VAR colour : Colour;  
colour := Red; (* unqualified use in assignment *)
```



### 4.7.1 Enumeration Type Extension

An enumeration type may be instituted as an extension of another enumeration type. Such a type is called a type extension and the type it extends is called its base type. To institute a type extension of an enumeration type, the identifier list within the institution clause is preceded with the identifier of the base type marked by prefix `+`. An extension type inherits all the enumerated values of its base type along with their enumeration values.

A type institution clause of the form

```
TYPE MoreColour = ( +Colour, Orange, Magenta, Cyan );
```

institutes an enumeration type `MoreColour` as an extension of enumeration type `Colour` with six enumerated values `Red`, `Green`, `Blue`, `Orange`, `Magenta` and `Cyan` whose enumeration values are 0 to 5 respectively.

An enumeration type is always downwards *compatible* with any of its type extensions, but an enumeration type extension is not upwards *compatible* with its base type. This restriction exists because any value of a base type is always a legal value of its extension type but the reverse is not necessarily the case.

## 4.8 Set Types

A set type is a *collection type* that represents a mathematical set of unique finite values and whose value type is an enumeration type.

```
setTypeInstitution := TYPE ident '=' SET OF enumTypeId ;
```

The value type determines the finite values of the set type. Each value may be stored in the set at most once. Value constructor `{*}` denotes the universal set. The maximum number of elements in a set type is defined by constant `Impl.MaxSetElements`. Its value is implementation defined but must not be less than 128.

Enumerated values may be referenced unqualified when passed to procedures `INSERT` and `REMOVE`, in a membership test expression, within an explicitly typed structured value or within an untyped structured value in an assignment to a set, provided that the value type of the target set matches the enumeration type.

## 4.9 Array Types

An *array type* is an indexed *collection type* with a non-zero *capacity limit* and a value type. *Capacity limit* and value type are specified in its institution clause.

```
arrayTypeInstitution := TYPE ident '=' ARRAY capacityLimit OF valueType ;
```

The *capacity limit* determines the maximum number of values that can be stored in an instance of the type. The *value type* is the type of its storable values. The index type is always `[0..capacityLimit-1] OF LONGCARD`.

Values are stored contiguously from the lowest index which is always zero, up to the highest index which is dynamically bounded. Values are addressed by their indexed position within the array using subscript notation.

Character arrays are always and implicitly terminated by an ISO646 NUL control character `0u0`.

### 4.9.1 Dynamic Bounding

The number of values stored in an array may change at runtime within the *capacity limit* of its type. To this end, arrays are internally represented by a record that consists of a *value count* field and a payload field. The *value count* field holds the number of values and the payload field holds the values stored in the array.

- pervasive function `COUNT()` returns the *value count* of a non-character array
- pervasive function `LENGTH()` returns the *length* of a character array, not counting its NUL terminator

### 4.9.2 Supported Operations

*Array types* support insert, append, concatenation, slicing and removal operations. A value is insertable and appendable if it is *compatible* with the array's value type; an array or array slice is insertable, appendable and concatenable if its value type is *compatible* with the target array's value type, provided that the result of the operation will not exceed the *capacity* of the target array.

## 4.10 Record Types

A **record type** is a compound type whose components are of arbitrary types. It may be extensible or non-extensible. Its components are called fields. The number of fields is arbitrary.

```
recordTypeInstitution :=
  TYPE ident '=' RECORD ( '(' recTypeToExtend ')' )? fieldList ( ';' fieldList )* END ;
fieldList := identList ':'
  ( typeIdent | arrayType | subrangeType | procedureType | OCTETSEQ '[' valueCount ']' ) ;
alias recTypeToExtend = recordTypeIdent ;
```

An **extensible record type** is instituted by specifying a base type enclosed in parentheses following reserved word `RECORD` in the institution clause. A **record type** whose institution lacks a base type specification is non-extensible. An **extensible record type** that specifies `NIL` instead of a base type is called a root type.

Any **extensible record type** inherits all the fields from its base type, including any fields the base type may have inherited. A type so defined is also called a type extension of the base type. A type extension is upwards **passing compatible** to its base type, but the base type is not downwards **compatible** with its type extensions. A pointer to a type extension is upwards **compatible** with a pointer to its base type.

### 4.10.1 Records with Octet Sequence Fields

Records may contain fields that can store a packed sequence of octets of a given non-zero length.

```
TYPE Foo = RECORD bar : OCTETSEQ [10] END; (* bar is a packed field of 10 octets *)
```

The values of such a field are of type `OCTET` and addressable by subscript. Negative indices are not supported.

### 4.10.2 Records with an Indeterminate Field

An indeterminate field is an open array field whose **capacity limit** cannot be determined from its declaration. Instead it is determined during allocation at runtime. A **pointer type** whose target type is a **record type** whose last field is indeterminate at compile time is called an indeterminate type.

```
indeterminateType := POINTER TO RECORD ( fieldList ';' )* indeterminateField END ;
indeterminateField := '+' ident ':' ARRAY capacityField OF typeIdent ;
alias capacityField = ident ;
```

An indeterminate type contains an embedded field of type `LONGCARD` to hold the **capacity limit** of the indeterminate field. The capacity field must be initialised when an instance of the type is allocated at runtime.

When allocating an instance using the `NEW` statement, the capacity field is initialised **implicitly**. When allocating an instance using library procedure `Storage.Allocate` directly, the capacity field must be initialised **explicitly**.

```
TYPE Foo = POINTER TO RECORD (* arbitrary fields *) + bar : ARRAY capacity OF Bar END;
Storage.Allocate(foo, TSIZE(Foo, 1000)); foo^.capacity := 1000; (* explicit initialisation *)
```

An instance of an indeterminate type is **assignment** and **copy compatible** to another if both are of the same type, regardless of their allocated **capacity**. However, when copying one instance to another, the operation may overflow the target instance's **capacity**. When such an overflow is detected, a runtime fault will occur.

## 4.11 Procedure Types

A procedure type is a reference type whose legal values are references to procedures or functions that match the signature associated with the type. The signature is specified within its institution clause.

```
procedureTypeInstitution :=
  TYPE ident '=' PROCEDURE ( '(' formalType ( ';' formalType )* ')' )? ( ':' returnedType )? ;
```

The instance of a procedure type may store any reference to a procedure or function whose signature matches the procedure signature associated with the procedure type or the invalid pointer `NIL`. The signatures of a procedure and a procedure type match if their respective formal types exactly match, that is, including any formal type attributes and including any return type.

## 4.12 Formal Types

A type specification for a procedure parameter is called a formal type. It may be associated with a formal type attribute. A formal type attribute determines the parameter passing convention of parameters of the formal type.

```
formalType := ( CONST | VAR )? nonAttrFormalType ;
```

A formal type may be a type identifier, an *open array type*, a casting formal type or a variadic formal type.

```
nonAttrFormalType := simpleFormalType | castingFormalType | variadicFormalType ;  
simpleFormalType := ( ARRAY OF )? typeIdent ;
```

### 4.12.1 Formal Open Array Types

An *open array type* is an *array type* whose *capacity limit* is indeterminate at compile time. The *capacity* and *value count* of a parameter of a formal *open array type* are determined at runtime when an argument is passed to it.

```
formalOpenArrayType := ARRAY OF typeIdent ;
```

### 4.12.2 Casting Formal Types

A casting formal type is a formal type with implicit cast semantics. An argument that is passed to a parameter of a casting formal type is implicitly cast to the formal type. The use of casting formal type syntax must be enabled by import of special module `UNSAFE`.

There are two casting formal types: `CAST ADDRESS` and `CAST OCTETSEQ`.

```
castingFormalType := CAST ( ADDRESS | OCTETSEQ ) ;
```

#### 4.12.2.1 Formal Type CAST ADDRESS

Formal type `CAST ADDRESS` imposes an implicit cast to type `UNSAFE.ADDRESS`.

For semantics see section 11.2.5.1 CAST ADDRESS in chapter Low-Level Facilities.

#### 4.12.2.2 Formal Type CAST OCTETSEQ

Formal type `CAST OCTETSEQ` imposes an implicit cast to a sequence of octets.

For semantics see section 11.2.5.2 CAST OCTETSEQ in chapter Low-Level Facilities.

### 4.12.3 Variadic Formal Types

A variadic formal type is a formal list type whose arity is indeterminate. Its argument count cannot be determined from its declaration and may vary. A parameter of a formal variadic type may be passed a variable number of arguments. The argument count is determined when a procedure with a variadic formal parameter is invoked.

```
variadicFormalType := ARGLIST OF typeIdent ;
```

## 4.13 Alignment

Alignment of components within compound types is implementation dependent, and under certain circumstances target platform dependent. There are however four exceptions for which alignment is language defined.

The following data are always packed

- the values of arrays of type `CHAR` or a subrange thereof are always octet aligned
- the values of arrays of type `OCTET` or a subrange thereof are always octet aligned
- the values of sequences of type `OCTETSEQ` or `CAST OCTETSEQ` are always octet aligned
- enumerated values in enumerated sets are always bitmapped, their bit index is their ordinal value

# Chapter 5

## Procedures

A procedure is a sequence of statements associated with an identifier and it may be invoked from any scope in which its identifier is visible. A procedure has its own local scope in which local entities may be declared. It may have zero or more associated parameters and it may return a result in its own name. A procedure that returns a result in its own name is called a function procedure, or simply a function. A procedure that does not is called a regular procedure. Collectively, both are referred to as procedures.

### 5.1 Procedure Institution

#### 5.1.1 Procedure Definition

A procedure definition specifies a procedure header only.

```
alias procedureDefinition = procedureHeader ;  
procedureHeader := PROCEDURE procedureSignature ;  
procedureSignature :=  
  ident ( '(' formalParams ( ';' formalParams )* ')' )? ( ':' returnType )? ;
```

#### 5.1.2 Procedure Declaration

A procedure declaration specifies a procedure header followed by a procedure body.

```
procedureDeclaration := procedureHeader ';' block ident ;
```

##### 5.1.2.1 The Procedure Header

A procedure header consists of a procedure's identifier, its formal parameters if any, and its return type if any. The procedure header represents the interface of the procedure.

##### 5.1.2.2 The Procedure Body

A procedure body consists of a local block followed by the procedure's identifier. The procedure body represents the implementation of the procedure.

##### 5.1.2.3 Formal Parameters

Parameter declarations within the parameter list of a procedure header are called the procedure's formal parameters. Formal parameters determine the number, order, type and passing convention of arguments that may be passed to a procedure when it is invoked.

```
formalParams := ( CONST | VAR )? identList ':' nonAttrFormalType ;
```

The identifier of a formal parameter is the identifier by which the value of the passed in argument or argument list can be referenced within the body of the procedure.

### 5.1.2.4 Parameter Passing Conventions

There are three parameter passing conventions.

- pass by value
- pass by reference, mutable
- pass by reference, immutable

### 5.1.2.5 Pass By Value

The default parameter passing convention is pass by value. It is used when no attribute is specified for a formal parameter or formal parameter list. Such a parameter is called a value parameter. When an argument is passed to a value parameter, a copy is passed to the procedure. The scope of the copy is the procedure's local scope.

### 5.1.2.6 Pass By Reference – Mutable

The pass by mutable reference convention is used when the `VAR` attribute is specified for a formal parameter or formal parameter list. Such a parameter is called a `VAR` parameter. When an argument is passed to a `VAR` parameter, a mutable reference to the argument is passed to the procedure. The procedure may or may not modify the argument. Immutable entities may therefore not be passed to `VAR` parameters.

### 5.1.2.7 Pass By Reference – Immutable

The pass by immutable reference convention is used when the `CONST` attribute is specified for a formal parameter or formal parameter list. Such a parameter is called a `CONST` parameter. When an argument is passed to a `CONST` parameter, an immutable reference to the argument is passed to the procedure. The procedure may not modify the argument. That is, within the scope of the procedure the `CONST` parameter is treated as if it was a constant. Both mutable and immutable entities may be passed to `CONST` parameters.

### 5.1.2.8 Formal Open Array Parameters

A formal open array parameter is a formal parameter of a formal *open array type*. Its *capacity* is indeterminate at compile time. *Capacity* and *value count* are determined at runtime when an argument is passed to it in a procedure call.

An argument passed to an open array parameter must be an array whose value type is *compatible* with the value type of the parameter to which it is passed.

Given the declarations

```
TYPE Chars = ARRAY 100 OF CHAR; Buffer = ARRAY 100 OF OCTET;
VAR chars : Chars; buffer : Buffer;
PROCEDURE PadWithZeroes ( VAR array : ARRAY OF OCTET );
```

variable `buffer` may be passed to parameter `array` in a call to procedure `PadWithZeroes` because their value types match, but variable `chars` may not be passed to `array` because their value types are incompatible.

```
chars := "abc"; buffer := { 1, 2, 3 };
PadWithZeroes(buffer); (* OK *)
PadWithZeroes(chars); (* compile time error : incompatible type *)
```

The actual *capacity* is passed as a hidden parameter immediately preceding the open array parameter.

```
PROCEDURE PadWithZeroes ( (*hidden capacity : LONGCARD;*) VAR array : ARRAY OF OCTET );
```

A call to function `CAPACITY()` with the identifier of the parameter within the procedure body returns this value.

```
PROCEDURE PadWithZeroes ( VAR array : ARRAY OF OCTET );
BEGIN
  WHILE COUNT(array) < CAPACITY(array) DO
    APPEND(array, 0)
  END (* WHILE *)
END PadWithZeroes;
```

### 5.1.2.9 Casting Formal Parameters

A casting formal parameter is a formal parameter of a casting formal type. It causes an argument passed to it to be cast to its formal type. There are two kinds.

#### 5.1.2.9.1 Casting Formal Address Parameter

A casting formal address parameter is a parameter of formal type `CAST ADDRESS`.

For semantics see section 11.2.5.1 CAST ADDRESS in chapter Low-Level Facilities.

#### 5.1.2.9.2 Casting Formal Octet Sequence Parameter

A casting formal *octet sequence* parameter is a parameter of formal type `CAST OCTETSEQ`.

For semantics see section 11.2.5.2 CAST OCTETSEQ in chapter Low-Level Facilities.

### 5.1.2.10 Variadic Formal Parameters

A variadic formal parameter is a formal parameter of a variadic formal type to which a variable number of arguments may be passed. All arguments must be *passing compatible* to its value type.

```
PROCEDURE average ( args : ARGLIST OF REAL ) : REAL;
...
v := average(1.2, 3.4, 5.6); (* <= OK *)   v := average(1.2, 3); (* <= incompatible type *)
```

The actual argument count is passed as a hidden parameter immediately preceding the argument list.

```
PROCEDURE average ( (*hidden argc : LONGCARD;*) args : ARGLIST OF REAL ) : REAL;
```

A call to function `COUNT()` with the identifier of the parameter within the procedure body returns this value.

```
PROCEDURE Variadic ( args : ARGLIST OF T );
BEGIN
  WRITE "number of arguments: ", COUNT(args);
```

A variadic parameter is an indexed collection. A `FOR` statement may be used to iterate over its values.

```
PROCEDURE average ( args : ARGLIST OF REAL ) : REAL;
VAR sum : REAL;
BEGIN
  IF COUNT(args) = 0 THEN RETURN 0.0 END;
  sum := 0.0;
  FOR value IN args DO
    sum := sum + value
  END; (* FOR *)
  RETURN sum / COUNT(args)
END average;
```

Values may also be addressed by subscript. The index of the first value is always zero.

```
FOR index, value IN args DO
  sum := sum + args[index] (* args[index] is equivalent to value *)
END; (* FOR *)
```

An argument list passed to a variadic formal parameter may be enclosed in curly braces to delineate it from other arguments. Such delineation is required whenever the arguments passed to a variadic formal parameter are not distinguishable by their type from the argument that follows the list. Given a formal parameter list of the form

```
PROCEDURE P ( list1, list2 : ARGLIST OF REAL; x : LONGREAL );
```

arguments to be passed to parameters `list1` and `list2` in a procedure call to `P` are not distinguishable by type from their following arguments and must be delineated by curly braces.

```
P({0.1, 2.3}, {3.4, 5.6, 7.8}, 9.0);
```

# Chapter 6

## Statements

A statement represents a computation that causes a transformation of the computational state of a program. Statements are used for their effects only, they do not return values and they may not occur within expressions.

### 6.1 The Assignment Statement

The assignment statement is a value-mutator statement. It assigns a given value to a mutable value.

```
assignment := designator ':=' expression ;
```

The designator is called the L-value and must be mutable. The expression is called the R-value and must be **assignment compatible** to the L-value. If these conditions are not met, a compile time error will occur. Assignment of constants `NIL`, `0u0` or `0` and calls to procedures containing such assignments must always be considered intentional and must **never** be subjected to dead store elimination!

### 6.2 The INC/DEC Statement

The INC/DEC statement is a value-mutator statement. It consists of a designator followed by a mutator symbol, where `++` increments and `--` decrements the designator by one. The designator is an L-value. It must be mutable and of a **whole number type**. If these conditions are not met, a compile time error will occur.

```
incOrDecStatement := designator ( '++' | '--' );
```

### 6.3 The COPY Statement

The `COPY` statement is a value-mutator statement. It copies values across type boundaries where types have a common or **compatible** value type.

```
copyStatement := COPY designator ':=' expression ;
```

The designator is called the L-value and it must be mutable. The expression is called the R-value and it must be **copy compatible** to the L-value. Both must be non-elementary types. If these conditions are not met, a compile time error will occur.

#### 6.3.1 Copying Sets

Variables of different set types are not **assignment compatible** but they are **copy compatible** if their value types match or one is an extension or subtype of the other.

Given the declarations

```
TYPE BaseColour = ( Red, Green, Blue ); ExtColour = ( +BaseColour, Orange, Magenta, Cyan );
TYPE BaseColours = SET OF BaseColour; ExtColours = SET OF ExtColour;
VAR baseColours : BaseColours; extColours : ExtColours;
```

- a statement of the form `COPY extColours := baseColours` copies set `baseColours` to set `extColours`

### 6.3.2 Copying Arrays

Variables of different *array types* are not *assignment compatible* but they are *copy compatible* if their value types match or one is an extension or subtype of the other.

Given the declarations

```
TYPE PosInt = [0..TMAX(INTEGER)] OF INTEGER;
TYPE ArrayA = ARRAY 20 OF INTEGER; ArrayB = ARRAY 10 OF PosInt;
VAR arrayA : ArrayA; arrayB : ArrayB;
```

- a statement of the form `COPY arrayA := arrayB` copies `arrayB` to `arrayA`
- a statement of the form `COPY arrayB := arrayA` copies `arrayA` to `arrayB`

### 6.3.3 Copying Between Sets and Arrays

Variables of array and set types are not *assignment compatible* with each other but they are *copy compatible* if their value types are *copy compatible*.

Given the declarations

```
TYPE Token = ( Unknown, Alias, And, Arglist, Array, Begin ... );
TYPE TokenSet = SET OF Token; TokenArray = ARRAY 100 OF Token;
VAR set : TokenSet; array : TokenArray;
```

- a statement of the form `COPY set := array` copies the token values stored in `array` to `set`
- a statement of the form `COPY array := set` copies the token values stored in `set` to `array`

## 6.4 The Procedure Call Statement

A procedure call statement is used to invoke a procedure. It consists of a designator that designates the called procedure, optionally followed by a list of parameters enclosed in parentheses to be passed to the procedure. Parameters passed are called arguments or actual parameters, those defined in the procedure's header are called formal parameters.

In every procedure call, the types of actual and formal parameters must match. If they don't, a compile time error will occur. Procedure calls may be recursive, that is, a procedure may call itself within its body. Recursive calls shall be optimised by tail call elimination (TCE), except when generating source code in a target language that does not support TCE.

## 6.5 The RETURN Statement

The `RETURN` statement is a flow-control statement used within a procedure body to return control to its caller and in the main body of the program to return control to the operating environment that activated the program.

Depending on the type of procedure in which a `RETURN` statement is used, it may or may not return a value. When returning from a regular procedure, no value may be returned. When returning from a function procedure a value of the procedure's return type must be returned. Non-compliance will cause a compile time error.

## 6.6 The NEW Statement

The `NEW` statement is a memory management statement. It allocates storage for a new instance of the target type referenced by the type of its argument. Its syntax is

```
newStmt := NEW designator ( ':' initialValue | CAPACITY expression )? ;
```

where `designator` must be an L-value and `initialValue` must be an R-value.

A statement of the form `NEW p`

- allocates a new instance of the target type of pointer `p` and passes a reference to the new instance in `p`



### 6.6.1 Allocation with Initialisation

By default, a newly allocated instance is not initialised. To initialise a new instance during its allocation, an initialisation value may be specified within a `NEW` statement.

A statement of the form `NEW array := { a, b, c }`

- allocates a new instance, initialises it with values `a`, `b` and `c`, and passes a reference to it in `array`

### 6.6.2 Allocation of Instances of Indeterminate Type

A capacity value may be specified to initialise a new instance of an indeterminate type.

A statement of the form `NEW buffer CAPACITY 1000`

- allocates a new instance of an indeterminate type with a **capacity limit** of 1000 values of the type's indeterminate field and passes a reference to the new instance in `buffer`

## 6.7 The RETAIN Statement

The `RETAIN` statement is a memory management statement. It prevents premature deallocation of the target referenced by its argument. It is only supported with data types that provide a library binding to `RETAIN`.

## 6.8 The RELEASE Statement

The `RELEASE` statement is a memory management statement. It deallocates the target unless there are any prior invocations of `RETAIN` outstanding for the target. If so, `RELEASE` cancels one prior invocation of `RETAIN`.

## 6.9 The IF Statement

The IF statement is a flow-control statement that passes control to one of a number of blocks within its body depending on the value of a boolean expression. It evaluates a condition in form of a boolean expression. If the condition is `TRUE` then program control passes to its `THEN` block. If the condition is `FALSE` and an `ELSIF` branch follows, then program control passes to the `ELSIF` branch to evaluate that branch's condition.

Again, if the condition is `TRUE` then program control passes to the `THEN` block of the `ELSIF` branch. If there are no `ELSIF` branches, or if the conditions of all `ELSIF` branches are `FALSE`, and if an `ELSE` branch follows, then program control passes to the `ELSE` block. At most one block in the statement is executed. `IF`-statements must always be terminated with an `END`.

## 6.10 The CASE Statement

The `CASE` statement is a flow-control statement that passes control to one of a number of labeled statements or statement sequences depending on the value of an ordinal expression.

```
caseStatement := CASE expression OF ( '|' case )+ ( ELSE statementSequence )? END ;
case := caseLabels ( ',' caseLabels )* : StatementSequence ;
caseLabels := constExpression ( .. constExpression )? ;
```

Control is passed to the first statement following the case label that matches the ordinal expression. Case labels must be unique. There is no “fall through”. At the end of a label, control is passed to the first statement after the `CASE` statement. If no case label matches, control is passed to the `ELSE` block, or, if there is no `ELSE` block, to the first statement after the `CASE` statement.

The statement is also used as a type-guard to ensure type safety when addressing fields of a type extension of an extensible record whose exact type is unknown. In this case, the fields of a specific type extension are only addressable within a case label matching the specific extension type. Otherwise a compile time fault occurs.

```
CASE record OF (* record may be of any extension of the root type or the root type itself *)
| ExtnType : record^.extnField := value; (* addressing a field of a specific type extension *)
```

## 6.11 The LOOP Statement

The `LOOP` statement is a flow-control statement used to repeat a statement or statement sequence within its body indefinitely unless explicitly terminated by an `EXIT` statement within its body.

## 6.12 The WHILE Statement

The `WHILE` statement is a flow-control statement used to repeat a statement or statement sequence depending on a condition in form of a boolean expression. The expression is evaluated each time before the `DO` block is executed. The `DO` block is repeated as long as the expression evaluates to `TRUE` unless the statement is explicitly terminated by an `EXIT` statement within its body.

## 6.13 The REPEAT Statement

The `REPEAT` statement is a flow-control statement used to repeat a statement or statement sequence depending on a condition in form of a boolean expression. The expression is evaluated each time after the `REPEAT` block has executed. The `REPEAT` block is repeated as long as the expression evaluates to `TRUE` unless the statement is explicitly terminated by an `EXIT` statement within its body.

## 6.14 The FOR Statement

The `FOR` statement is a flow-control statement that iterates over an iterable entity, executing a statement or statement sequence during each iteration cycle. It consists of a loop header and a loop body. The header consists of one or two loop variants, an optional descender, and an iterable expression. The body consists of a statement or statement sequence.

```
forStatement := FOR forLoopVariants IN iterableExpr DO statementSequence END ;
```

### 6.14.1 The Loop Variants

The loop variant section contains one or two identifiers through which the accessor of the iterated entity and its value are referenced within the loop.

```
forLoopVariants := accessor ( '--' )? ( ',' value )? ;  
alias accessor, value = ident ;
```

The loop variant identifiers are declared by the loop header and they are only in scope within the header and body. Once a `FOR` statement has terminated, its loop variants are no longer in scope. The number of loop variants depends on the loop's iterable expression.

- If the iterable expression is an ordinal type, a subrange of an ordinal type or the designator of a set, then the accessor is also its value. The header thus contains only one loop variant, immutable within the loop body.
- If the iterable expression is the designator of an array `a`, the header contains an accessor representing the iteration index `i` and an optional second loop variant `v` representing its value `a[i]`. Index `i` is always immutable within the loop body. The value is mutable if `a` is mutable, otherwise immutable.
- If the iterable expression is the designator of a key-value dictionary `d`, the header contains an accessor representing the iteration key `k` and an optional second loop variant `v` representing the key's value `d[k]`. Key `k` is always immutable within the loop body. The value is mutable if `d` is mutable, otherwise immutable.

During the first iteration cycle the loop variants reference that accessor, value or accessor/value pair which is first for the prevailing iteration order. Before each subsequent iteration cycle the loop variants are advanced to their successor for the prevailing iteration order. Iteration continues until all accessors, values or pairs have been visited unless the `FOR` statement is explicitly terminated by an `EXIT` statement within its body.

### 6.14.2 The Iteration Order

The actual order of values is determined by the type of the iterable. The default iteration order is ascending. For descending order, the first loop variant may be suffixed with a descender, denoted by the `--` symbol.

### 6.14.3 The Iterable Expression

The iterable expression — or simply iterable — is denoted by (1) the identifier of an ordinal or subrange type, (2) an anonymous subrange thereof, or (3) the designator of a set, array or array slice, or a key-value dictionary.

```
iterableExpr := ordinalRange OF ordinalType | designator ;
```

### 6.14.4 Iterating over Ordinal Types

If the iterable is an ordinal type or a subrange thereof, only one loop variant may be given. The loop variant is immutable. Its type is the ordinal type or subrange given and the loop iterates over all values of the iterable.

A statement of the form **FOR** char **IN** CHAR **DO** WRITE char **END** iterates over all values of type CHAR.

Given declaration **TYPE** Colour = ( Red, Green, Blue ), a statement of the form **FOR** colour **IN** Colour **DO** ... **END** iterates over all enumerated values of type Colour. The current value is referenced as colour within the loop.

A statement of the form

```
FOR value-- IN [1..99] OF CARDINAL DO  
  WRITE value, " bottles of beer, take one down and pass it around.\n"  
END; (* FOR *)
```

iterates over subrange [1..99] of type CARDINAL in descending order.

### 6.14.5 Iterating over Collections

If the iterable is the designator of a set, only one loop variant may be given. The loop variant is immutable. Its type is the element type of the set and the loop iterates over all values in the set.

A statement of the form **FOR** elem **IN** set **DO** ... **END** iterates over all elements stored in set.

If the iterable is the designator of an array or array slice, one or two loop variants may be given. The first is immutable and of type LONGCARD. The optional second is mutable if the array is mutable, otherwise immutable, and its type is the value type of the array. The loop iterates over all values stored in the array.

A statement of the form

```
FOR index, value IN array DO array[index] := value END;
```

iterates over all values of array.

A statement of the form

```
FOR index, value IN source[n..m] DO WRITE "source[" , index, "] = " , value, "\n" END;
```

iterates over all values in array slice source[n..m].

If the iterable is the designator of a key-value dictionary, one or two loop variants may be given. The first is immutable and of the dictionary's key type. The optional second is mutable if the dictionary is mutable, otherwise immutable, its type is the value type of the dictionary. The loop iterates over all key-value pairs stored in the dictionary.

A statement of the form

```
FOR key, value IN dict DO WRITE "dict[" , key, "] = " , value, "\n" END;
```

iterates over all key-value pairs of dict.

## 6.15 The EXIT Statement

The **EXIT** statement is a control-flow statement used within the body of a **LOOP**, **WHILE**, **REPEAT** or **FOR** statement to terminate execution of the loop and transfer control to the first statement after its body. The **EXIT** statement may only occur within the body of loop statements. Non-compliance will cause a compile time error.

## 6.16 The READ Statement

The `READ` statement reads one or more values from a communications channel and transfers the values in a non-empty variadic list of designators. Its syntax is

```
readStmt := READ ( '@' chan ':' )? NEW? designator ( ',' designator )*
```

where `chan` is the designator of a communications channel.

A statement of the form

```
READ @file : foo, bar, baz;
```

reads three values from channel `file` and passes them in `foo`, `bar` and `baz`.

The communications channel may be omitted in which case a default input channel is used.

A statement of the form `READ foo` reads a value from the default input channel and passes it in variable `foo`.

The list of designators may be prefixed by reserved word `NEW` to allocate new memory for each value read. In this case every designator must designate a value of a *pointer type* and its value must be `NIL`.

A statement of the form

```
READ @file : NEW ptr;
```

reads a value from channel `file`, allocates a new instance of `ptr` and passes the read value in `ptr^`.

## 6.17 The WRITE Statement

The `WRITE` statement writes one or more values to a communications channel. Its syntax is

```
writeStmt := WRITE ( '@' chan ':' )? outputArgs ( ',' outputArgs )* ;
outputArgs := formattedArgs | unformattedArgs ;
formattedArgs := '#' '(' fmtStr, expressionList ')' ;
alias unformattedArgs = expressionList ;
```

where `chan` is the designator of a communications channel and `fmtStr` is a format specifier string.

A statement of the form

```
WRITE @file : foo, bar, baz;
```

writes the values `foo`, `bar` and `baz` to channel `file`.

The communications channel may be omitted in which case a default output channel is used.

A statement of the form `WRITE foo` writes the value of `foo` to the default output channel.

The list of output values may include formatted and unformatted values. A formatted value or value list is preceded by a format specifier, enclosed in parentheses and preceded by `#`.

A statement of the form

```
WRITE @file : "Price: ", #("5:3;2", price), "incl. VAT\n";
```

writes three values to channel `file` applying format specifier `"5:3;2"` to value `price`.

Format specifiers are library defined but language specified for all built-in types, their interpretation takes place within the IO library. The syntax of format specifiers for built-in types is described in Appendix H.

## 6.18 The NOP Statement

The `NOP` statement represents an explicit empty statement.

The grammar forbids empty loops and blocks. When intended, the `NOP` statement must be used instead.

```
WHILE stream.nextChar() = ' ' DO (* skip all whitespace *)
  NOP
END; (* WHILE *)
```

# Chapter 7

## Operators and Expressions

### 7.1 Operator Precedence and Associativity

Expressions are evaluated according to the precedence level and associativity of the operators within the expression. Operators of higher precedence are evaluated before operators of lower precedence. Where operators have the same precedence, their associativity determines evaluation order. For left-associative operators of the same precedence the evaluation order is left to right. The properties of operators are given in the table below:

Operator	Math Symbols	Meaning	Associativity	Arity	Position	Precedence
=	=	equality	none	binary	infix	(lowest) 1
#	$\neq$	inequality				
<	< $\subset$ <	less, strict subset, precedes				
<=	$\leq \subseteq \preceq$	less/equal, subset, precedes/equal				
>	> $\supset \succ$	greater, strict superset, succeeds				
>=	$\geq \supseteq \succeq$	greater/equal, superset, succeeds/equal				
==	$\equiv$	identity				
IN	$\in$	set membership, key set membership				
+	+ $\cup$	addition, set union	left	binary	infix	2
-x	-	arithmetic negation	none	unary	prefix	
x-y	-	subtraction	left	binary	infix	2
&		concatenation				
\	\	set difference				
OR	$\vee$	logical disjunction				
*	$\times \cap$	multiplication, set intersection	left	binary	infix	3
/	$\div \triangle$	division, symmetric set difference				
DIV	$\div$	integer division				
MOD	mod	modulus				
AND	$\wedge$	logical conjunction				
NOT	$\neg$	logical negation	none	unary	prefix	4
::		type conversion	none	binary	infix	5
( )		sub-expression precedence	none	unary	prefix	6
[ ]	$a_i$	subscript	left	unary	postfix	6
[ ... ]		insertion				
^		dereference				
.		field selection	left	binary	infix	(highest) 6

**Table 7.1:** Operators and their properties

## 7.2 Relational Operations

### 7.2.1 Equality

The binary infix operator `=` denotes an equality test. An expression of the form `a = b` returns `TRUE` if `a` and `b` are equal, otherwise `FALSE`. If both operands are arrays, or both operands are sets, their value types must match. Otherwise, both operands must be of the same type.

### 7.2.2 Inequality

The binary infix operator `#` denotes an inequality test. An expression of the form `a # b` returns `TRUE` if `a` and `b` are not equal, otherwise `FALSE`. If both operands are arrays, or both operands are sets, their value types must match. Otherwise, both operands must be of the same type.

### 7.2.3 Less-Than

The binary infix operator `<` denotes a less-than comparison when the operands are of a *scalar type*. An expression of the form `a < b` returns `TRUE` if the value of `a` is less than the value of `b`, otherwise `FALSE`. Both operands must be of the same type.

### 7.2.4 Precedes

The binary infix operator `<` denotes collation order comparison when the operands are character strings. An expression of the form `a < b` returns `TRUE` if `a` precedes `b` using the prevailing collation order, else `FALSE`.

### 7.2.5 Strict Subset

The binary infix operator `<` denotes a strict subset comparison when the operands are of a set type. An expression of the form `a < b` returns `TRUE` if  $a \subset b$ , otherwise `FALSE`. The value types of the operands must match.

### 7.2.6 Less-Than-Or-Equal

The binary infix operator `<=` denotes a less-than-or-equal comparison when the operands are of a *scalar type*. An expression of the form `a <= b` returns `TRUE` if the value of `a` is less than or equal to the value of `b`, otherwise `FALSE`. Both operands must be of the same type.

### 7.2.7 Precedes-Or-Equal

The binary infix operator `<=` denotes collation order comparison when the operands are character strings. An expression of the form `a <= b` returns `TRUE` if `a` precedes `b` or if both rank equally using the prevailing collation order, otherwise `FALSE`.

### 7.2.8 Subset

The binary infix operator `<=` denotes a subset comparison when the operands are of a set type. An expression of the form `a <= b` returns `TRUE` if  $a \subseteq b$ , otherwise `FALSE`. The value types of the operands must match.

### 7.2.9 Greater-Than

The binary infix operator `>` denotes a greater-than comparison when the operands are of a *scalar type*. An expression of the form `a > b` returns `TRUE` if the value of `a` is greater than the value of `b`, otherwise `FALSE`. Both operands must be of the same type.

### 7.2.10 Succeeds

The binary infix operator `>` denotes collation order comparison when the operands are character strings. An expression of the form `a > b` returns `TRUE` if `a` succeeds `b` using the prevailing collation order, else `FALSE`.

### 7.2.11 Strict Superset

The binary infix operator `>` denotes a strict superset comparison when the operands are of a set type. An expression of the form `a > b` returns `TRUE` if  $a \supset b$ , otherwise `FALSE`. The value types of the operands must match.

### 7.2.12 Greater-Than-Or-Equal

The binary infix operator `>=` denotes a greater-than-or-equal comparison when the operands are of a *scalar type*. An expression of the form `a >= b` returns `TRUE` if the value of `a` is greater than or equal to the value of `b`, otherwise `FALSE`. Both operands must be of the same type.

### 7.2.13 Succeeds-Or-Equal

The binary infix operator `>=` denotes collation order comparison when the operands are character strings. An expression of the form `a >= b` returns `TRUE` if `a` succeeds `b` or if both rank equally using the prevailing collation order, otherwise `FALSE`.

### 7.2.14 Superset

The binary infix operator `>=` denotes a superset comparison when the operands are of a set type. An expression of the form `a >= b` returns `TRUE` if  $a \supseteq b$ , otherwise `FALSE`. The value types of the operands must match.

### 7.2.15 Identity

The binary infix operator `==` denotes an identity test. An expression of the form `a == b` returns `TRUE` if `UNSAFE.ADR(a)` equals `UNSAFE.ADR(b)`, otherwise `FALSE`.

### 7.2.16 Set Membership

The binary infix operator `IN` denotes a set membership test. An expression of the form `a IN set` returns `TRUE` if  $a \in set$ , otherwise `FALSE`. The right operand must be of a set type. The left operand must be of the set type's value type.

## 7.3 Logical Operations

### 7.3.1 Disjunction

The binary infix operator `OR` denotes logical disjunction. An expression of the form `a OR b` returns the logical disjunction  $a \vee b$ . Both operands must be of type `BOOLEAN`.

### 7.3.2 Conjunction

The binary infix operator `AND` denotes logical conjunction. An expression of the form `a AND b` returns the logical conjunction  $a \wedge b$ . Both operands must be of type `BOOLEAN`.

### 7.3.3 Logical Negation

The unary prefix operator `NOT` denotes logical negation. An expression of the form `NOT a` returns the logical inverse  $\neg a$ . The operand must be of type `BOOLEAN`.

## 7.4 Arithmetic Operations

### 7.4.1 Addition

The binary infix operator `+` denotes addition when its operands are of numeric type. An expression of the form `a + b` returns the sum of `a` and `b`. Both operands must be of *compatible* numeric types.

## 7.4.2 Arithmetic Negation

The unary prefix operator `-` denotes arithmetic negation. An expression of the form `-a` returns the complement of `a`. The operand must be of a signed numeric type. A unary `-` operator may only appear before a multi-term expression if the expression is enclosed in parentheses.\*

## 7.4.3 Subtraction

The binary infix operator `-` denotes subtraction. An expression of the form `a - b` returns the difference of `a` and `b`. Both operands must be of *compatible* numeric types.

## 7.4.4 Multiplication

The binary infix operator `*` denotes multiplication when its operands are of numeric type. An expression of the form `a * b` returns the product  $a \cdot b$ . Both operands must be of *compatible* numeric types.

## 7.4.5 Real Number Division

The binary infix operator `/` denotes real number division when its operands are of a *real number type*. An expression of the form `a / b` returns the quotient  $\frac{a}{b}$ . Both operands must be of *compatible* numeric types.

## 7.4.6 Integer Division

The binary infix operator `DIV` denotes Euclidean integer division. An expression of the form `a DIV b` returns the quotient  $\frac{a}{b}$  where  $a, b \in: T \wedge T \in \tau_{whole}$ . Both operands must be of *compatible* numeric types.

## 7.4.7 Modulus

The binary infix operator `MOD` denotes the modulus (remainder) of Euclidean integer division. An expression of the form `a MOD b` returns the modulus  $a \bmod b$  where  $a, b \in: T \wedge T \in \tau_{whole}$ . Both operands must be of *compatible* numeric types.

# 7.5 Set Operations

## 7.5.1 Set Union

The binary infix operator `+` denotes set union when its operands are of a set type. An expression of the form `a + b` returns the set union  $a \cup b$ . Both operands must be of a set type. The value types of the operands must match.

## 7.5.2 Set Difference

The binary infix operator `\` denotes set difference. An expression of the form `a \ b` returns the set difference  $a \setminus b$ . Both operands must be of a set type. The value types of the operands must match.

## 7.5.3 Set Intersection

The binary infix operator `*` denotes set intersection when its operands are of a set type. An expression of the form `a * b` returns the set intersection  $a \cap b$ . Both operands must be of a set type. The value types of the operands must match.

## 7.5.4 Symmetric Set Difference

The binary infix operator `/` denotes symmetric set difference when its operands are of a set type. An expression of the form `a / b` returns the symmetric set difference  $a \triangle b$ . Both operands must be of a set type. The value types of the operands must match.

---

\*This resolves an ambiguity in earlier versions of Modula-2.



## 7.6 Collection Operations

### 7.6.1 Insertion

The subscript operator `[ ]` with a subscript followed by suffix `..` denotes insertion. An assignment of the form `a[i..] := v` inserts value `v` into array `a` at subscript `i`. The operand must be of an **array type**. An insertion designator may only appear as an L-value on the left side of an assignment.

### 7.6.2 Concatenation

The binary infix operator `&` denotes concatenation. An expression of the form `a & b` returns the concatenation product of `a` and `b`. Both operands must be of a **collection type**. The value types of the operands must be copy compatible to the L-Value to which the expression is copied or passed to.

## 7.7 Designation Operations

### 7.7.1 Subscript Addressing

The postfix operator `[ ... ]` denotes subscript addressing. The operator encloses a subscript or a range of subscripts. The operand must be the designator of an array. Subscripts must be of a **whole number type**.

A sole subscript addresses a single value. A paired subscript addresses a range of values.

- An expression of the form `a[i]` designates the value of `a` at subscript `i`
- An expression of the form `a[i..j]` designates the value range of `a` from subscript `i` to `j`

Non-negative subscripts represent positions relative to the first value.

- $index\ i = i :: LONGCARD \ \forall i \in \{\tau_{whole} \mid 0 \leq i \leq count\ a \wedge i < capacity\ a\}$

Negative subscripts represent positions relative to the position after the last value.

- $index\ i = COUNT(a) - ABS(i) :: LONGCARD \ \forall i \in \{\tau_{whole} \mid i < 0 \wedge abs\ i < count\ a\}$

where `a` is the array operand and `i` a subscript value.

### 7.7.2 Pointer Dereference

The unary postfix operator `^` denotes pointer dereference. An expression of the form `p^` designates the entity referenced by pointer `p` where `p` must be of a **pointer type**.

### 7.7.3 Name and Field Selection

Binary infix operator `.` denotes name selection when its left operand is a qualifier of a qualified name, and field selection when it is the identifier of a record or record field. A designator `a.b` designates `b` qualified by `a`.

## 7.8 Miscellaneous Operations

### 7.8.1 Type Conversion

The binary infix operator `::` denotes type conversion. An expression of the form `T :: v` converts value `v` to type `T` and returns the converted value. The left operand must be a type identifier. The right operand may be a value or expression of any convertible type.

### 7.8.2 Sub-Expression Precedence

The bifix operator `( ... )` denotes sub-expression precedence. In an expression of the form `a □ (b ○ c)`, the evaluation of `(b ○ c)` takes precedence for arbitrary operators `□` and `○` regardless of their precedence levels.

### 7.8.3 Function Call

A designator followed by a possibly empty parameter list denotes a function call. The parentheses are mandatory.

## 7.9 Operations By Type

### 7.9.1 Elementary Types

	= #	< <=	> >=	+ x-y	-x	*	/	DIV MOD	AND OR	NOT	::
BOOLEAN	•	•	•	–	–	–	–	–	•	•	–
Enumerations	•	•	•	–	–	–	–	–	–	–	–
Character Types	•	•	•	–	–	–	–	–	–	–	•
Cardinal Types	•	•	•	•	–	•	–	•	–	–	•
Integer Types	•	•	•	•	•	•	–	•	–	–	•
Real Number Types	•	•	•	•	•	•	•	–	–	–	•

**Table 7.2:** Elementary types and their supported operators

	ORD() SUCC()	PRED() SUCC()	ABS()	ODD()	SGN()	POW2() LOG2()	ENTIER()	TMIN() TMAX()	TSIZE()
BOOLEAN	•	•	–	–	–	–	–	•	•
Enumerations	•	•	–	–	–	–	–	•	•
Character Types	•	•	–	–	–	–	–	•	•
Cardinal Types	•	•	–	•	–	•	–	•	•
Integer Types	•	•	–	•	•	–	–	•	•
Real Number Types	–	–	•	–	•	–	•	•	•

**Table 7.3:** Elementary types and their supported pervasive functions and macros

	ADD() SUB()	SHL()	SHR() ASHR()	BIT() SETBIT()	BWNOT()	BWAND() BWOR()
BOOLEAN	–	–	–	–	–	–
Enumerations	–	–	–	–	–	–
Character Types	•	•	•	•	•	•
Cardinal Types	•	•	•	•	•	•
Integer Types	•	•	•	•	•	•
Real Number Types	•	•	•	•	•	•

**Table 7.4:** Elementary types and their supported UNSAFE procedures and functions

### 7.9.2 Pointer Types

	= #	^	NEW RELEASE	TSIZE()
OPAQUE	•	–	•	•
POINTER	•	•	•	•

**Table 7.5:** Pointer type operations

### 7.9.3 Procedure Types

	= #	p(...)	TSIZE()
PROCEDURE	•	•	•

**Table 7.6:** Procedure type operations

**Legend:** • supported – not supported

## 7.9.4 Compound Types

	= #	< <=	> >=	==	IN	+ \	&	* /	a[i]	a[i..] a[i..j]	.	COPY	FOR
SET	•	•	•	•	•	•	–	•	–	–	–	•	•
ARRAY	•	–	–	•	–	–	•	–	•	•	–	•	•
OF CHAR	•	•	•	•	–	–	•	–	•	•	–	•	•
OF UNICHAR	•	•	•	•	–	–	•	–	•	•	–	•	•
RECORD	•	–	–	•	–	–	–	–	–	–	•	•	–
OCTETSEQ	•	–	–	•	–	–	–	–	•	–	–	•	•

**Table 7.7:** Compound types and their supported operators

	APPEND()	INSERT()	REMOVE()	CAPACITY() TLIMIT()	COUNT()	LENGTH()	TSIZE()
SET	–	•	•	•	•	–	•
ARRAY	•	–	•	•	•	–	•
OF CHAR	•	–	•	•	–	•	•
OF UNICHAR	•	–	•	•	–	•	•
RECORD	–	–	–	–	–	–	•
OCTETSEQ	–	–	–	–	–	•	–

**Table 7.8:** Compound types and their supported pervasive procedures, functions and macros

## 7.9.5 Formal Types

	=	#	<	<=	>	>=	a[i]	a[i..j]	a[i..]
ARRAY OF	•	•	–	–	–	–	•	•	•
CHAR	•	•	•	•	•	•	•	•	•
UNICHAR	•	•	•	•	•	•	•	•	•
ARGLIST OF	–	–	–	–	–	–	•	–	–
CAST OCTETSEQ	–	–	–	–	–	–	•	–	–

**Table 7.9:** Formal types and their supported operators

	COPY L-Value	COPY R-Value	FOR	APPEND() REMOVE()	CAPACITY()	COUNT()	LENGTH()
ARRAY OF	•	•	•	•	•	•	–
CHAR	•	•	•	•	•	–	•
UNICHAR	•	•	•	•	•	–	•
ARGLIST OF	–	•	•	–	–	•	–
CAST OCTETSEQ	–	•	•	–	–	–	•

**Table 7.10:** Formal types and their supported built-in syntax, procedures and functions

**Legend:** • supported – not supported

## 7.9.6 Machine Types

	=	#	<	<=	>	>=	a[i]	a[i..j]	a[i..]	^
BYTE	•	•	•	•	•	•	–	–	–	–
WORD	•	•	•	•	•	•	–	–	–	–
LONGWORD	•	•	•	•	•	•	–	–	–	–
ADDRESS	•	•	•	•	•	•	•	–	–	•

**Table 7.11:** Machine types and their supported operators

	ODD() SUB()	ADD() SUB()	SHL() SHR() ASHR()	SHR() ASHR()	BIT() SETBIT()	BWNOT() BWAND() BWOR()	TMIN() TMAX()	TSIZE()
BYTE	•	•	•	•	•	•	•	•
WORD	•	•	•	•	•	•	•	•
LONGWORD	•	•	•	•	•	•	•	•
ADDRESS	•	•	•	•	•	•	•	•

**Table 7.12:** Machine types and their supported built-in procedures, functions and macros

## 7.9.7 ADT Operations

	a[i] L-Value	a[i] R-Value	a[i..] L-Value	a[i..j] L-Value	a[i..j] R-Value	REMOVE()	COPY	FOR
Array ADTs	①	②	③	①	②	④	⑤	⑤

**Required Bindings:** ① \_ATSTORE ② \_ATVALUE ③ \_ATINSERT ④ \_ATREMOVE ⑤ LENGTH/COUNT, \_ATSTORE, \_ATVALUE

	dict[key] L-Value	dict[key] R-Value	REMOVE()	key IN dict	COPY	FOR
Dictionary ADTs	①	②	③	②	④	④

**Required Bindings:** ① \_KVSTORE ② \_KVALUE ③ REMOVE ④ FIRST, LAST, PREV, NEXT, \_KVSTORE, \_KVALUE

## 7.9.8 ADT Syntax Bindings

	NEW RETAIN RELEASE	READ WRITE	APPEND()	REMOVE()	COUNT()	LENGTH()
Any ADT	○	○	–	–	–	–
Array ADTs	○	○	○	–	○	○
Dictionary ADTs	○	○	–	○	○	–

**Supported Bindings:** ○ supported – not supported

	FIRST() LAST()	PREV() NEXT()	_ATVALUE() _ATSTORE()	_ATINSERT() _ATREMOVE()	_KVALUE() _KVSTORE()	TLIMIT()
Array ADTs	–	–	○	○	–	○
Dictionary ADTs	○	○	–	–	○	○

**Supported Bindings:** ○ supported – not supported

# Chapter 8

## Type Compatibility

Type **compatibility** is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether an entity  $\varepsilon_1$  of type  $\tau_1$  may be assigned to, copied to, passed to or used together in an expression with an entity  $\varepsilon_2$  of type  $\tau_2$ . Type compatibility thus determines the compatibility of two entities by their associated types.

### 8.1 Compatibility Relations

The compatibility relation between any two entities is congruent to the compatibility relation of their types. Any compatibility relation is always transitive, but not necessarily commutative. There are five compatibility relations.

#### 8.1.1 Assignment Compatibility

Assignment compatibility is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether an entity  $\varepsilon_1$  of type  $\tau_1$  may be assigned to an entity  $\varepsilon_2$  of type  $\tau_2$ . The relation is denoted by the  $\overset{\text{}}{\Rightarrow}$  symbol.

$$\tau_1 \overset{\text{}}{\Rightarrow} \tau_2 \wedge \varepsilon_1 \in: \tau_1 \wedge \varepsilon_2 \in: \tau_2 \Rightarrow \varepsilon_1 \overset{\text{}}{\Rightarrow} \varepsilon_2 \quad (8.1)$$

#### 8.1.2 Copy Compatibility

Copy compatibility is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether an entity  $\varepsilon_1$  of type  $\tau_1$  may be copied to an entity  $\varepsilon_2$  of type  $\tau_2$ . The relation is denoted by the  $\overset{\text{copy}}{\Rightarrow}$  symbol.

$$\tau_1 \overset{\text{copy}}{\Rightarrow} \tau_2 \wedge \varepsilon_1 \in: \tau_1 \wedge \varepsilon_2 \in: \tau_2 \Rightarrow \varepsilon_1 \overset{\text{copy}}{\Rightarrow} \varepsilon_2 \quad (8.2)$$

#### 8.1.3 By-Value Passing Compatibility

By-value passing compatibility is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether an entity  $\varepsilon_1$  of type  $\tau_1$  may be passed to a formal by-value parameter  $\varepsilon_2$  of type  $\tau_2$ . The relation is denoted by the  $\overset{\text{val}}{\Rightarrow}$  symbol.

$$\tau_1 \overset{\text{val}}{\Rightarrow} \tau_2 \wedge \varepsilon_1 \in: \tau_1 \wedge \varepsilon_2 \in: \tau_2 \Rightarrow \varepsilon_1 \overset{\text{val}}{\Rightarrow} \varepsilon_2 \quad (8.3)$$

#### 8.1.4 By-Reference Passing Compatibility

By-reference passing compatibility is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether an entity  $\varepsilon_1$  of type  $\tau_1$  may be passed to a formal by-reference parameter  $\varepsilon_2$  of type  $\tau_2$ . The relation is denoted by the  $\overset{\text{ref}}{\Rightarrow}$  symbol.

$$\tau_1 \overset{\text{ref}}{\Rightarrow} \tau_2 \wedge \varepsilon_1 \in: \tau_1 \wedge \varepsilon_2 \in: \tau_2 \Rightarrow \varepsilon_1 \overset{\text{ref}}{\Rightarrow} \varepsilon_2 \quad (8.4)$$

#### 8.1.5 Expression Compatibility

Expression compatibility is a relation between two types  $\tau_1$  and  $\tau_2$  that determines whether two entities  $\varepsilon_1$  of type  $\tau_1$  and  $\varepsilon_2$  of type  $\tau_2$  may be used together in a binary expression. The relation is commutative. It is denoted by the  $\overset{\text{expr}}{\leftrightarrow}$  symbol.

$$\tau_1 \overset{\text{expr}}{\leftrightarrow} \tau_2 \wedge \varepsilon_1 \in: \tau_1 \wedge \varepsilon_2 \in: \tau_2 \Rightarrow \varepsilon_1 \overset{\text{expr}}{\leftrightarrow} \varepsilon_2 \quad (8.5)$$

### 8.1.6 Hierarchy of Compatibility Relations

Assignment compatibility implies all other compatibility relations. Copy compatibility implies by-value passing compatibility. Passing compatibility implies expression compatibility.

$$\tau_1 \dot{=} \tau_2 \Rightarrow \left\{ \begin{array}{l} \tau_1 \xrightarrow{\text{copy}} \tau_2 \Rightarrow \tau_1 \xrightarrow{\text{val}} \tau_2 \\ \tau_1 \xrightarrow{\text{ref}} \tau_2 \end{array} \right. \Rightarrow \tau_1 \xleftrightarrow{\text{expr}} \tau_2 \quad (8.6)$$

### 8.1.7 Full and Limited Compatibility

*Full* or *unlimited* compatibility encompasses all available compatibility relations. Conversely, *limited* compatibility encompasses one or more but not all relations. Whenever entities are called **compatible** without qualifier, *full* compatibility is implied.

## 8.2 Type Regimes

A type regime is a set of rules that govern type compatibility. A type regime is called limited if only a subset of its rule set applies. The following type regimes are in use

### 8.2.1 Strict Name Equivalence

Under strict name equivalence, types are equivalent if their identifiers are identical. Equivalent types are fully **compatible** and the relationship is commutative.

$$\Gamma_{\text{name-equiv}} \vdash \text{id } \tau_1 = \text{id } \tau_2 \Rightarrow \tau_1 \equiv \tau_2 \Rightarrow \tau_1 \dot{=} \tau_2 \wedge \tau_2 \dot{=} \tau_1 \quad (8.7)$$

### 8.2.2 Super-Type Equivalence

Under super-type equivalence, a type is upwards **compatible** with its super-type, but a super-type is not downwards **compatible** with its subtype.

$$\Gamma_{\text{supertype-equiv}} \vdash \tau_1 <: \tau_2 \Rightarrow \tau_1 \dot{=} \tau_2 \wedge \neg \tau_2 \dot{=} \tau_1 \quad (8.8)$$

### 8.2.3 Value Type Equivalence

Under value type equivalence, compound types are **copy compatible** if their value types are **compatible**.

$$\Gamma_{\text{comp-equiv}} \vdash \text{comp-type } \tau_1 \dot{=} \text{comp-type } \tau_2 \Rightarrow \tau_1 \xrightarrow{\text{copy}} \tau_2 \wedge \tau_2 \xrightarrow{\text{copy}} \tau_1 \quad (8.9)$$

### 8.2.4 Target Type Equivalence

Under target type equivalence, **pointer types** are **compatible** if their target types are.

$$\Gamma_{\text{target-equiv}} \vdash \text{target-type } \tau_1 \dot{=} \text{target-type } \tau_2 \Rightarrow \tau_1 \dot{=} \tau_2 \quad (8.10)$$

### 8.2.5 Structural Equivalence

Under structural equivalence, types are **compatible** if they have identical structure. Types have identical structure if their canonical definitions are identical. Structural Equivalence is commutative. It is denoted by the  $\hat{=}$  symbol, pronounced “*is structurally equivalent to*”.

$$\Gamma_{\text{struct-equiv}} \vdash \tau_1 \hat{=} \tau_2 \Rightarrow \tau_1 \dot{=} \tau_2 \wedge \tau_2 \dot{=} \tau_1 \quad (8.11)$$

## 8.3 Compatibility by Type Classification

All types follow strict name equivalence by default, except for type `OCTETSEQ`.

$$\boxed{\text{def}} \quad \forall \tau_1, \tau_2 \in \{\tau_{\text{any}} \setminus \tau_{\text{octetseq}} \mid \text{id } \tau_1 = \text{id } \tau_2\} : \tau_1 \dot{=} \tau_2 \wedge \tau_2 \dot{=} \tau_1$$

The type regime is then further relaxed depending on the classification of the type.

### 8.3.1 Compatibility of Alias Types

An alias type is always identical to the type of which it is an alias.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{any} \mid \tau_1 \text{ is-alias-of } \tau_2\} : \tau_1 \equiv \tau_2$

### 8.3.2 Compatibility of Derived Types

A derived type is by definition incompatible with the type from which it is derived.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{any} \mid \tau_1 \text{ is-derivative-of } \tau_2\} : \neg \tau_1 \xrightarrow{=} \tau_2 \wedge \neg \tau_2 \xrightarrow{=} \tau_1$

### 8.3.3 Compatibility of Anonymous Types

Anonymous types with the same canonical type declaration are identical.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{anon} \mid \tau_1 \text{ is-canonically-equal-to } \tau_2\} : \tau_1 \equiv \tau_2$

### 8.3.4 Compatibility of Subrange Types

Subrange types follow super-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{ordinal} \mid \tau_1 \text{ is-subrange-of } \tau_2\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \neg \tau_2 \xrightarrow{=} \tau_1$   
 where  $\tau_{ordinal} = \tau_{char} \cap \tau_{whole} \cap \tau_{enum}$ .

### 8.3.5 Compatibility of Enumeration Types

Enumeration types follow super-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{enum} \mid \tau_2 \text{ is-extension-of } \tau_1\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \neg \tau_2 \xrightarrow{=} \tau_1$

### 8.3.6 Compatibility of Set Types

Set types follow value-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{set} \mid \text{value-type } \tau_1 = \text{value-type } \tau_2\} : \tau_1 \xrightarrow{copy} \tau_2 \wedge \tau_2 \xrightarrow{copy} \tau_1$

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{set} \mid \text{value-type } \tau_1 \subset \text{value-type } \tau_2\} : \tau_1 \xrightarrow{copy} \tau_2 \wedge \neg \tau_2 \xrightarrow{copy} \tau_1$

### 8.3.7 Compatibility of Array Types

**Array types** follow value-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{array} \mid \text{value-type } \tau_1 = \text{value-type } \tau_2\} : \tau_1 \xrightarrow{copy} \tau_2 \wedge \tau_2 \xrightarrow{copy} \tau_1$

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{array} \mid \text{value-type } \tau_1 \subset \text{value-type } \tau_2\} : \tau_1 \xrightarrow{copy} \tau_2 \wedge \neg \tau_2 \xrightarrow{copy} \tau_1$

### 8.3.8 Compatibility of Record Types

Non-Extensible **record types** only follow the default strict name equivalence whereas **extensible record types** further follow limited super-type equivalence. Their compatibility is limited to by-reference passing compatibility and below.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{extrec} \mid \tau_2 \text{ is-extension-of } \tau_1\} : \tau_1 \xrightarrow{ref} \tau_2 \wedge \neg \tau_2 \xrightarrow{ref} \tau_1$

### 8.3.9 Compatibility of Pointer Types

**Opaque pointer types** only follow the default strict name equivalence while transparent **pointer types** further follow target-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{transptr} \mid \text{target-type } \tau_1 = \text{target-type } \tau_2\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \tau_2 \xrightarrow{=} \tau_1$   
 where  $\tau_{transptr} = \tau_{pointer} \setminus \tau_{opaque}$ .

**Extensible record pointer types** follow unlimited super-type equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{extrec} \mid \tau_2 \text{ is-extension-of } \tau_1\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \neg \tau_2 \xrightarrow{=} \tau_1$

### 8.3.10 Compatibility of Procedure Types

Procedure types follow structural equivalence.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{proc} \mid \tau_1 \hat{=} \tau_2\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \tau_2 \xrightarrow{=} \tau_1$

Any two procedure types are structurally equivalent if their respective signatures match.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{proc} \mid \text{signature-of } \tau_1 \doteq \text{signature-of } \tau_2\} : \tau_1 \hat{=} \tau_2$

The type of a procedure  $p$  is the anonymous procedure type  $\tau$  defined by  $p$ 's institution.

**def**  $\forall p \in \{\text{institution-of } p \xrightarrow{def} \tau \mid \tau \in \tau_{anon} \wedge \tau \in \tau_{proc}\} :$   
 $\text{signature-of } p \equiv \text{signature-of } \tau \wedge \text{type-of } p = \tau$

### 8.3.11 Compatibility of Numeric Types

Numeric types follow strict name equivalence (default).

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{numeric} \mid id \tau_1 = id \tau_2\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \tau_2 \xrightarrow{=} \tau_1$

Numeric subrange types further follow super-type equivalence.

**def**  $\forall \sigma, \tau \in \{\tau_{scalar} \mid \sigma <: \tau\} : \sigma \xrightarrow{=} \tau \wedge \neg \tau \xrightarrow{=} \sigma$

### 8.3.12 Compatibility of Machine Types

**machine types** follow strict name equivalence only.

**def**  $\forall \tau_1, \tau_2 \in \{\tau_{machine} \mid id \tau_1 = id \tau_2\} : \tau_1 \xrightarrow{=} \tau_2 \wedge \tau_2 \xrightarrow{=} \tau_1$

Parameters of formal type `OCTETSEQ` are **copy** and **passing compatible** only.

**def**  $\forall \varepsilon_1, \varepsilon_2 \in \{\text{type-of } \varepsilon_1, \varepsilon_2 = \tau_{octetseq}\} :$   
 $\neg \varepsilon_1 \xrightarrow{=} \varepsilon_2 \wedge \varepsilon_1 \xrightarrow{copy} \varepsilon_2 \wedge \varepsilon_1 \xrightarrow{val} \varepsilon_2 \wedge \varepsilon_1 \xrightarrow{ref} \varepsilon_2 \wedge \neg \varepsilon_1 \xleftrightarrow{expr} \varepsilon_2$

## 8.4 Compatibility of Literals

The compatibility of a literal value cannot be determined by type because literals are not strictly associated with a specific type. Instead, compatibility is defined as follows:

A literal value  $v$  is **compatible** with type  $\tau$  if  $v$  does not overflow  $\tau$  and if

- $v$  is a character code or quoted character literal and  $\tau$  is a character type, or
- $v$  is a whole number literal and  $\tau$  is a **whole number type** or **machine type**, or
- $v$  is a real number literal and  $\tau$  is a **real number type**, or
- $v$  is a quoted character string literal and  $\tau$  is a **string type**, or
- $v$  is a non-empty structured literal and structurally equivalent to  $\tau$

An empty structured literal  $v$  is **compatible** with type  $\tau$  if

- $v$  is the empty string `""` and  $\tau$  is a character type or **string type**, or
- $v$  is the empty collection `{}` and  $\tau$  is a set type or **array type** but not a **string type**

The universal set literal `{*}` is **compatible** with any set type.



# Chapter 9

## Predefined Identifiers

Predefined identifiers are language defined and built-in. They are **pervasive**, that is, they are visible in every scope without import. Pervasive identifiers do not have qualified names and are always referenced unqualified. They consist of all-uppercase letters possibly followed by a digit. Pervasive identifiers may **not** be redefined.

The following identifiers are predefined:

NIL, TRUE, FALSE, BOOLEAN, OCTET, CHAR, UNICHAR, CARDINAL, LONGCARD, INTEGER, LONGINT, REAL, LONGREAL, APPEND, INSERT, REMOVE, CHR, UCHR, ORD, COLLATION, ODD, ABS, SGN, MIN, MAX, LOG2, POW2, ENTIER, PRED, SUCC, PTR, CAPACITY, COUNT, LENGTH, FIRST, LAST, PREV, NEXT, TMIN, TMAX, TSIZE, TLIMIT.

### 9.1 Predefined Constants

#### 9.1.1 Constant NIL

Identifier `NIL` represents an invalid pointer or address value. It is per definition *compatible* with any *pointer type*, including all *opaque pointer types* and all procedure types.

#### 9.1.2 Constants TRUE and FALSE

Identifiers `TRUE` and `FALSE` represent the values of type `BOOLEAN`.

### 9.2 Predefined Types

#### 9.2.1 Type BOOLEAN

Type `BOOLEAN` is an *enumerated type*.

It represents logical truth values used in boolean expressions.

```
TYPE BOOLEAN = ( FALSE, TRUE );
```

The order is significant. `ORD(FALSE)` is always zero, `ORD(TRUE)` is always one.

#### 9.2.2 Type OCTET

Type `OCTET` is a *cardinal type*.

It represents the smallest addressable unit which is per definition 8 bits.

Its value range is always `[0..255]`.

Whole number literals are *compatible* with type `OCTET`.

### 9.2.3 Type CHAR

Type `CHAR` is a *countable type*.

It represents the 7-bit character codes of ISO 646 (aka ASCII).

Its value range is always `[0u0..0u7F]`.

Quoted literals of exactly one ISO 646 code point are *compatible* with type `CHAR`.

### 9.2.4 Type UNICHAR

Type `UNICHAR` is a *countable type*.

It represents the 32-bit character codes of ISO 10646 in UCS-4 encoding.

Its value range is always `[0u0..0u10FFFF]`.

Quoted literals of exactly one ISO 10646 code point are *compatible* with type `UNICHAR`.

### 9.2.5 Type CARDINAL

Type `CARDINAL` is a *cardinal type*. It represents unsigned *whole numbers*.

Its value range is `[0..TMAX(CARDINAL)]` where  $TMAX(CARDINAL) = POW2(8 * TSIZE(CARDINAL)) - 1$ .

The value of `TSIZE(CARDINAL)` is implementation defined, where  $TSIZE(CARDINAL) \leq TSIZE(LONGCARD)$ .

Whole number literals are *compatible* with type `CARDINAL`.

### 9.2.6 Type LONGCARD

Type `LONGCARD` is a *cardinal type*. It represents unsigned *whole numbers* with extended range.

Its value range is `[0..TMAX(LONGCARD)]` where  $TMAX(LONGCARD) = POW2(8 * TSIZE(LONGCARD)) - 1$ .

The value of `TSIZE(LONGCARD)` is implementation defined, where  $TSIZE(LONGCARD) \geq TSIZE(ADDRESS)$ .

Whole number literals are *compatible* with type `LONGCARD`.

### 9.2.7 Type INTEGER

Type `INTEGER` is an *integer type*. It represents signed *whole numbers*.

Its value range is `[TMIN(INTEGER)..TMAX(INTEGER)]`.

The internal representation of type `INTEGER` is always in two's complement. Thus

- $TMIN(INTEGER) = (-1) * POW2(8 * TSIZE(INTEGER) - 1)$
- $TMAX(INTEGER) = POW2(8 * TSIZE(INTEGER) - 1) - 1$

The value of `TSIZE(INTEGER)` is always equal to `TSIZE(CARDINAL)`.

Whole number literals are *compatible* with type `INTEGER`.

### 9.2.8 Type LONGINT

Type `LONGINT` is an *integer type*. It represents signed *whole numbers* with extended range.

Its value range is `[TMIN(LONGINT)..TMAX(LONGINT)]`.

The internal representation of type `LONGINT` is always in two's complement. Thus

- $TMIN(LONGINT) = (-1) * POW2(8 * TSIZE(LONGINT) - 1)$
- $TMAX(LONGINT) = POW2(8 * TSIZE(LONGINT) - 1) - 1$

The value of `TSIZE(LONGINT)` is always equal to `TSIZE(LONGCARD)`.

Whole number literals are *compatible* with type `LONGINT`.

## 9.2.9 Type REAL

Type `REAL` is a *real number type*. It represents real numbers with standard range and precision.

Its value range is `[TMIN(REAL)..TMAX(REAL)]`.

The internal representation of type `REAL` is implementation defined, where

- `TMIN(REAL) <= TMIN(LONGINT)` and `TMAX(REAL) >= TMAX(LONGCARD)`

IEEE 754 single or double precision format is recommended for type `REAL`.

Real number literals are *compatible* with type `REAL`.

### 9.2.10 Type LONGREAL

Type `LONGREAL` is a *real number type*. It represents real numbers with extended range and/or precision.

Its value range is `[TMIN(LONGREAL)..TMAX(LONGREAL)]`.

The internal representation of type `LONGREAL` is implementation defined, where

- `TMIN(LONGREAL) <= TMIN(REAL)` and `TMAX(LONGREAL) >= TMAX(REAL)`
- the precision of type `REAL` must not exceed that of type `LONGREAL`

IEEE 754 double or quadruple precision format is recommended for type `LONGREAL`.

Real number literals are *compatible* with type `LONGREAL`.

## 9.3 Predefined Procedures

### 9.3.1 Procedure APPEND

Procedure `APPEND` appends the values of a given list to an array.

```
PROCEDURE APPEND ( c : ArrayType; values : ARGLIST OF ValueType );
```

Values to be appended must be of the value type of the array.

### 9.3.2 Procedure INSERT

Procedure `INSERT` inserts the values of a given list into a set.

```
PROCEDURE INSERT ( VAR set : SetType; values : ARGLIST OF ValueType );
```

Values passed in the list must be of the value type of the set.

### 9.3.3 Procedure REMOVE

Procedure `REMOVE` has multiple signatures, depending on the type of its first argument.

If its first argument is a set, it removes the values in a given list from the set.

```
PROCEDURE REMOVE ( VAR set : SetType; values : ARGLIST OF ValueType );
```

Values passed in the list must be of the value type of the set.

If its first argument is a dictionary, it removes the keys in a given list along with their values from the dictionary.

```
PROCEDURE REMOVE ( VAR dict : DictType; values : ARGLIST OF KeyType );
```

Values passed in the list must be of the key type of the dictionary.

If its first argument is an array, it removes the values addressed by a given index range from the array.

```
PROCEDURE REMOVE ( VAR array : ArrayType; startIndex, endIndex : LONGCARD );
```

Any relative (negative) indices passed are translated into absolute (positive) indices by the language processor.

## 9.4 Predefined Functions

### 9.4.1 Function CHR

Function `CHR` returns the character whose character code is its argument.

```
PROCEDURE CHR ( n : T ) : CHAR; → where  $0 \leq n \leq 127 \wedge T \in \tau_{cardinal}$ 
```

### 9.4.2 Function UCHR

Function `UCHR` returns the unicode character whose character code is its argument.

```
PROCEDURE UCHR ( n : T ) : UNICHAR; → where  $0 \leq n \leq 0x10FFFF \wedge T \in \tau_{cardinal}$ 
```

### 9.4.3 Function COLLATION

Function `COLLATION` returns the index within the prevailing collation sequence for a given character.

```
PROCEDURE COLLATION ( ch : T ) : LONGCARD; → where  $T \in \tau_{char}$ 
```

The return values are determined as follows:

- for tabulator `0u09` and newline `0u0A`, the index for whitespace `0u20` is looked up and returned
- for all other control characters, `TMAX(LONGCARD)` is returned – they are ignored by the collation algorithm
- for characters in range `[0u20..0u7E]`, the return value is looked up in the prevailing collation table
- for accented letters, the return value equals that of the corresponding unaccented letter
- for all other characters, the ordinal value of the character is returned

The default collation sequence for printable 7-bit characters is:

```
_0123456789@aAbBcCdDeEfFgGhHiIjJkKlLmMnNoOpPqQrRsStTuUvVwWxXyYzZ!"#$%&'()*+,-./:;<=>?[\]^_`{|}~
```

The prevailing collation order may be changed by import of a collation library. For details see setion 10.5.

### 9.4.4 Function ORD

Function `ORD` returns the ordinal value of its countable argument.

```
PROCEDURE ORD ( value : T ) : LONGCARD; → where  $T \in \tau_{countable}$ 
```

### 9.4.5 Function ODD

Function `ODD` returns `TRUE` if its argument is odd, otherwise `FALSE`.

```
PROCEDURE ODD ( value : T ) : LONGCARD; → where  $T \in \tau_{whole} \cup \tau_{machine}$ 
```

### 9.4.6 Function ABS

Function `ABS` returns the absolute value of its scalar argument.

```
PROCEDURE ABS ( value : T1 ) : T2; → where  $T1 \in \tau_{signed} \cap \tau_{scalar} \wedge T2 = T1$ 
```

### 9.4.7 Function SGN

Function `SGN` returns the sign or *signum value* of its argument.

```
PROCEDURE SGN ( value : T1 ) : T2; → where  $T1 \in \tau_{signed} \cap \tau_{scalar} \wedge T2 = T1$ 
```

### 9.4.8 Function MIN

Function `MIN` returns the smallest value in its variadic argument list.

```
PROCEDURE MIN ( values : ARGLIST OF T1 ) : T2; → where T1 ∈  $\tau_{countable} \cup \tau_{scalar} \wedge T2 = T1$ 
```

### 9.4.9 Function MAX

Function `MAX` returns the largest value in its variadic argument list.

```
PROCEDURE MAX ( values : ARGLIST OF T1 ) : T2; → where T1 ∈  $\tau_{countable} \cup \tau_{scalar} \wedge T2 = T1$ 
```

### 9.4.10 Function LOG2

Function `LOG2` returns the truncated binary logarithm of its cardinal argument.

```
PROCEDURE LOG2 ( n : T1 ) : T2; → where  $n \neq 0 \wedge T1 \in \tau_{cardinal} \wedge T2 = T1$ 
```

### 9.4.11 Function POW2

Function `POW2` returns the value of its cardinal argument raised to the power of 2.

```
PROCEDURE POW2 ( n : T1 ) : T2; → where T1 ∈  $\tau_{cardinal} \wedge T2 = T1$ 
```

### 9.4.12 Function ENTIER

Function `ENTIER` returns the largest integer or *entier* of its real number argument.

```
PROCEDURE ENTIER ( r : T1 ) : T2; → where T1 ∈  $\tau_{real} \wedge T2 = T1$ 
```

### 9.4.13 Function PRED

Function `PRED` returns the predecessor of its countable argument.

```
PROCEDURE PRED ( value : T1 ) : T2; → where T1 ∈  $\tau_{countable} \wedge T2 = T1$ 
```

### 9.4.14 Function SUCC

Function `SUCC` returns the successor of its countable argument.

```
PROCEDURE SUCC ( value : T1 ) : T2; → where T1 ∈  $\tau_{countable} \wedge T2 = T1$ 
```

### 9.4.15 Function PTR

Function `PTR` returns a pointer to its argument.

```
PROCEDURE PTR ( value : T1 ) : POINTER TO T2; → where T1 ∈  $\tau_{any} \wedge T2 = T1$ 
```

### 9.4.16 Function CAPACITY

Function `CAPACITY` returns the *capacity* of its collection argument.

```
PROCEDURE CAPACITY ( entity : T ) : LONGCARD; → where T ∈  $\tau_{collection}$ 
```

### 9.4.17 Function COUNT

Function `COUNT` returns the value-count or *cardinality* of its collection argument.

**PROCEDURE** COUNT ( entity : T ) : LONGCARD;  $\longrightarrow$  where  $T \in \tau_{collection} \setminus \tau_{string} \setminus \tau_{octetseq}$

The argument must be either (1) a value of a *collection type* that is **not** a *string type*, or (2) the identifier of an open array parameter whose value type is not a character type, or (3) the identifier of a variadic argument list.

### 9.4.18 Function LENGTH

Function `LENGTH` returns the *length* of the character string or *octet sequence* denoted by its argument.

**PROCEDURE** LENGTH ( entity : T ) : LONGCARD;  $\longrightarrow$  where  $T \in \tau_{string} \cup \tau_{octetseq}$

The argument must be either (1) a value of a *string type*, or (2) the identifier of an open array parameter whose value type is a character type, or (3) the identifier of a record field or formal parameter of type `OCTETSEQ`.

### 9.4.19 Function FIRST

Function `FIRST` returns the first key of the dictionary denoted by its argument.

**PROCEDURE** FIRST ( dict : T1 ) : T2;  $\longrightarrow$  where  $T1 \in \tau_{dictionary} \wedge T2 \text{ is-keytype-of } T1$

The dictionary type must be a library ADT that implements key/value storage and provides a binding to `FIRST`, otherwise a compile time error will occur. The function returns `NIL` if its argument is an empty dictionary.

### 9.4.20 Function LAST

Function `LAST` returns the last key of the dictionary denoted by its argument.

**PROCEDURE** LAST ( dict : T1 ) : T2;  $\longrightarrow$  where  $T1 \in \tau_{dictionary} \wedge T2 \text{ is-keytype-of } T1$

The dictionary type must be a library ADT that implements key/value storage and provides a binding to `LAST`, otherwise a compile time error will occur. The function returns `NIL` if its argument is an empty dictionary.

### 9.4.21 Function PREV

Function `PREV` returns the key that precedes the given key of the given dictionary.

**PROCEDURE** PREV ( dict : T1; key : T2 ) : T2;  $\longrightarrow$  where  $T1 \in \tau_{dictionary} \wedge T2 \text{ is-keytype-of } T1$

The dictionary type must be a library ADT that implements key/value storage and provides a binding to `PREV`, otherwise a compile time error will occur. The function returns `NIL` if the second argument is the first key.

### 9.4.22 Function NEXT

Function `NEXT` returns the key that succeeds the given key of the given dictionary.

**PROCEDURE** NEXT ( dict : T1; key : T2 ) : T2;  $\longrightarrow$  where  $T1 \in \tau_{dictionary} \wedge T2 \text{ is-keytype-of } T1$

The dictionary type must be a library ADT that implements key/value storage and provides a binding to `NEXT`, otherwise a compile time error will occur. The function returns `NIL` if the second argument is the last key.

## 9.5 Built-in Macros

### 9.5.1 Macro TMIN

An invocation of macro `TMIN` is replaced by the smallest value of the type denoted by its argument.

(\*MACRO\*) **PROCEDURE** TMIN ( TypeIdent ) : T;  $\longrightarrow$  where  $\text{TypeIdent} = id \wedge T \in \tau_{countable} \cup \tau_{scalar}$

### 9.5.2 Macro TMAX

An invocation of macro `TMAX` is replaced by the largest value of the type denoted by its argument.

(\*MACRO\*) **PROCEDURE** TMAX ( TypeIdent ) : T;  $\longrightarrow$  where  $\text{TypeIdent} = id \wedge T \in \tau_{countable} \cup \tau_{scalar}$

### 9.5.3 Macro TSIZE

An invocation of macro `TSIZE` is replaced by the *allocation size* of the type denoted by its argument.

If the (primary) argument does **not** denote an indeterminate type, no second argument may be passed.

```
(*MACRO*) PROCEDURE TSIZE ( TypeIdent ) : LONGCARD;
```

If the primary argument denotes a *pointer type* with indeterminate target, a second argument must be passed,

```
(*MACRO*) PROCEDURE TSIZE ( TypeIdent; capacity : LONGCARD ) : LONGCARD;
```

and the result is the *allocation size* for the target with the *capacity* given by the second argument.

In any event the (primary) argument must be a type identifier.

### 9.5.4 Macro TLIMIT

An invocation of macro `TLIMIT` is replaced by the *capacity limit* of the type denoted by its argument.

```
(*MACRO*) PROCEDURE TLIMIT ( TypeIdent ) : LONGCARD;
```

The argument must be an identifier of a *collection type*.

## 9.6 Primitives

Primitives are low-level procedures or macros that implement statements or designators within statements and expressions. Their identifiers consist of all-uppercase letters prefixed by `_`. Primitives are **not** callable directly in user code, but they may be the target of syntax bindings in ADT library modules. When a statement or designator implemented by a primitive is found, it is replaced with an invocation of the associated primitive.

### 9.6.1 Primitive \_ATVALUE

Primitive `_ATVALUE` implements R-value subscript designators for array types.

It returns the value stored at a given index in an **indexed** collection.

```
PROCEDURE _ATVALUE ( CONST a : ArrayType; atIndex : LONGCARD ) : ValueType;
```

Any R-value subscript designator `a[i]` is replaced by a function call `_ATVALUE(a, i)`.

### 9.6.2 Primitive \_KVALUE

Primitive `_KVALUE` implements R-value subscript designators for dictionary types.

It returns the value stored for a given key in a **key/value** collection.

```
PROCEDURE _KVALUE ( CONST dict : DictType; key : KeyType ) : ValueType;
```

Any R-value subscript designator `dict[key]` is replaced by a function call `_KVALUE(dict, key)`.

### 9.6.3 Primitive \_ATSTORE

Primitive `_STORE` implements L-value subscript designators for array types.

It stores a given value at a given index in an **indexed** collection.

```
PROCEDURE _ATSTORE ( VAR a : ArrayType; atIndex : LONGCARD; value : ValueType );
```

A statement of the form `a[i] := v` is replaced by a procedure call `_ATSTORE(a, i, v)`.

### 9.6.4 Primitive \_KVSTORE

Primitive `_KVSTORE` implements L-value subscript designators for dictionary types.

It stores a given value for a given key in a **key/value** collection.

```
PROCEDURE _KVSTORE ( VAR dict : DictType; key : KeyType; value : ValueType );
```

A statement of the form `dict[key] := value` is replaced by a procedure call `_KVSTORE(dict, key, value)`.

### 9.6.5 Primitive `_ATINSERT`

Primitive `_ATINSERT` implements L-value subscript insertion designators.

It inserts one or more values into an **indexed** collection starting at a given index.

```
PROCEDURE _ATINSERT ( VAR a : ArrayType; atIndex : LONGCARD; values : ARGLIST OF ValueType );
```

A statement of the form `a[i..] := v` is replaced by a procedure call `_ATINSERT(a, i, v)`.

### 9.6.6 Primitive `_ATREMOVE`

Primitive `_ATREMOVE` implements syntax for indexed value removal.

It removes a range of values from an **indexed** collection within a given index range.

```
PROCEDURE _ATREMOVE ( VAR a : ArrayType; startIndex, endIndex : LONGCARD );
```

For values `a` of an **array type**, `s` of a **string type** and `c` of any indexed collection type

- a statement of the form `a := {}` is replaced by a procedure call `_ATREMOVE(a, 0, COUNT(a)-1)`
- a statement of the form `s := ""` is replaced by a procedure call `_ATREMOVE(s, 0, LENGTH(s)-1)`
- a statement of the form `REMOVE(c, i, j)` is replaced by a procedure call `_ATREMOVE(c, i, j)`

### 9.6.7 Primitive `_ALLOC`

Primitive `_ALLOC` implements memory allocation for `NEW` statements.

It allocates a memory block of a given size in octets and passes a pointer to it in its first argument.

```
PROCEDURE _ALLOC ( VAR p : CAST ADDRESS; size : LONGCARD );
```

### 9.6.8 Primitive `_DEALLOC`

Primitive `_DEALLOC` implements memory deallocation for `RELEASE` statements.

It deallocates a memory block pointed to by its argument and passes `NIL` back therein.

```
PROCEDURE _DEALLOC ( VAR p : CAST ADDRESS );
```

### 9.6.9 Primitive `_STDIN`

Primitive `_STDIN` inserts the default value for an omitted input channel in `READ` statements.

```
PROCEDURE _STDIN : LibraryDefinedChannelType;
```

### 9.6.10 Primitive `_STDOUT`

Primitive `_STDOUT` inserts the default value for an omitted output channel in `WRITE` statements.

```
PROCEDURE _STDOUT : LibraryDefinedChannelType;
```

## 9.7 Restrictions

Predefined constants may be passed to function `UNSAFE.CAST()` but may not be passed to functions `PTR()` and `UNSAFE.ADR()`. Predefined procedures, functions and macros may not be assigned and may not be passed as arguments to any procedure, function or macro.



# Chapter 10

## Syntax Binding

Syntax Binding is the process of mapping library defined procedures to built-in syntax. A procedure is bound to a given syntax form by including a binding specifier within the procedure's header. The specifier determines to which syntax form the procedure is bound. It must be included in both the procedure's definition and declaration.

```
procedureHeader := PROCEDURE ( '[' bindingSpecifier '']? procedureSignature ;  
bindingSpecifier :=  
  NEW ( '+' | '#' )? | RETAIN | RELEASE |  
  READ ( '*' )? | WRITE ( '#' )? | bindableIdent ;  
bindableIdent := Pervasive | Primitive ;
```

A syntax form to which library defined procedures may be bound is said to be bindable. Procedures bound to it are called its bindings. While bindable syntax forms are type agnostic, their bindings are type specific, that is to say, each binding supports arguments of a specific type. For each type to be supported by a bindable syntax form, a binding specific to arguments of the type is required.

A bindable syntax form `S` is said to have a binding for type `T` when a library procedure `p` that supports arguments of `T` has been bound to `S`. Procedure `p` is said to be bound to `S` in respect of `T`.

### 10.1 Syntax Transformation

Bindable syntax forms act as *Wirthian macros*. A syntax form `S` with binding `p` for type `T`, an occurrence of `S` with a primary argument or argument list `a` of type `T` is resolved into a procedure call to `p`, passing `a`.

`S a ...`  $\rightarrow$  `T.p(a...)`

### 10.2 Memory Management Bindings

#### 10.2.1 Binding to NEW

Statement `NEW` has three bindable syntax forms.

##### 10.2.2 NEW without Arguments

An ADT module `Foo` with a binding

```
PROCEDURE [NEW] New ( VAR p : Foo );
```

binds ADT library procedure `Foo.New()` to the `NEW` statement in respect of type `Foo`.

Any use of the `NEW` statement with a designator of type `Foo` and without initialiser nor capacity specifier is then replaced by a call to procedure `Foo.New()`.

Given the following import and declaration within a client module

```
IMPORT foo; VAR foo : Foo;
```

a statement of the form `NEW foo` is resolved into a library call `Foo.New(foo)`.

### 10.2.3 NEW with Initialiser

An ADT module `Foo` with a binding

```
PROCEDURE [NEW+] NewWithArgs ( VAR p : Foo; initVal : ARGLIST OF Value );
```

binds ADT library procedure `Foo.NewWithArgs()` to the **NEW** statement in respect of type `Foo`.

Any use of the **NEW** statement with a designator of type `Foo` and an initialiser is then resolved into a call to procedure `Foo.NewWithArgs()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

a statement of the form **NEW** `foo := { a, b, c }` is resolved into a library call `Foo.NewWithArgs(foo, a, b, c)`.

### 10.2.4 NEW with Capacity

An ADT module `Foo` with a binding

```
PROCEDURE [NEW#] NewWithCapacity ( VAR p : Foo; capacity : LONGCARD );
```

binds ADT library procedure `NewWithCapacity()` to the **NEW** statement in respect of type `Foo`.

Any use of the **NEW** statement with a designator of type `Foo` and a capacity specifier is then resolved into a call to procedure `Foo.NewWithCapacity()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

a statement of the form **NEW** `foo CAPACITY n` is resolved into a library call `Foo.NewWithCapacity(foo, n)`.

### 10.2.5 Binding to RETAIN

An ADT module `Foo` with a binding

```
PROCEDURE [RETAIN] Retain ( p : Foo );
```

binds ADT library procedure `Retain()` to the **RETAIN** statement in respect of type `Foo`.

Any use of **RETAIN** with a designator of type `Foo` is then resolved into a call to procedure `Foo.Retain()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

a statement of the form **RETAIN** `foo` is resolved into a library call `Foo.Retain(foo)`.

### 10.2.6 Binding to RELEASE

An ADT module `Foo` with a binding

```
PROCEDURE [RELEASE] Release ( VAR p : Foo );
```

binds ADT library procedure `Release()` to the **RELEASE** statement in respect of type `Foo`.

Any use of **RELEASE** with a designator of type `Foo` is then resolved into a call to procedure `Foo.Release()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

a statement of the form **RELEASE** `foo` is resolved into a library call `Foo.Release(foo)`.

## 10.3 IO Bindings

### 10.3.1 Binding to READ

Statement `READ` has two associated bindings.

- `[READ]` bindings are used to generate calls for **plain** designators in a `READ` statement
- `[READ*]` bindings are used to generate calls for **NEW-prefixed** designators in a `READ` statement

An IO module `FooIO` with a binding

```
PROCEDURE [READ] Read ( chan : IOChannel; VAR value : Foo );
```

binds IO library procedure `Read()` to the `READ` statement in respect of type `Foo`.

Any plain designator of type `Foo` within a `READ` statement will then generate a call to procedure `FooIO.Read()`.

An IO module `FooIO` with a binding

```
PROCEDURE [READ*] ReadNew ( chan : IOChannel; VAR ptr : Foo ); (* Foo is a pointer type *)
```

binds IO library procedure `ReadNew()` to the `READ` statement in respect of pointer type `Foo`.

Any `NEW`-prefixed designator of pointer type `Foo` within a `READ` statement will then generate a call to procedure `FooIO.ReadNew()`.

#### 10.3.1.1 READ with Explicit IO Channel

Given the following imports and declaration within a client module

```
IMPORT Foo, FooIO, IOChannel; VAR foo : Foo; file : IOChannel;
```

- a statement of the form `READ @file : foo` is resolved into a library call `FooIO.Read(file, foo)`
- a statement of the form `READ @file : NEW foo` is resolved into a library call `FooIO.ReadNew(file, foo)`

#### 10.3.1.2 READ with Default IO Channel

If the IO channel argument is omitted, default input channel primitive `_STDIN` is automatically inserted. In order to resolve `_STDIN` an appropriate IO library must be imported to bind an input channel to `_STDIN` and make it visible within the current module scope. Import of module `StdIO` binds `StdIO.in()` to `_STDIN`.

Given the following imports and declaration within a client module

```
IMPORT Foo, FooIO, StdIO; VAR foo : Foo;
```

- a statement of the form `READ foo` is resolved into a library call `FooIO.Read(StdIO.in(), foo)`
- a statement of the form `READ NEW foo` is resolved into a library call `FooIO.ReadNew(StdIO.in(), foo)`

#### 10.3.1.3 READ with Multiple Arguments

Given modules `Foo`, `Bar`, `Baz` and `Bam`, their respective IO modules `FooIO`, `BarIO`, `BazIO` and `BamIO` with bindings to `READ` for their respective types and the following imports and declaration within a client module

```
IMPORT Foo, FooIO, Bar, BarIO, Baz, BazIO, Bam, BamIO, StdIO;
VAR foo : Foo; bar : Bar; baz : Baz; bam : Bam;
```

a statement of the form

```
READ foo, NEW bar, baz, NEW bam;
```

is resolved into a statement sequence

```
FooIO.Read(StdIO.in(), foo); BarIO.ReadNew(StdIO.in(), bar);
BazIO.Read(StdIO.in(), baz); BamIO.ReadNew(StdIO.in(), bam);
```

### 10.3.2 Binding to WRITE

Statement `WRITE` has two associated bindings.

- `[WRITE]` bindings are used to generate calls for **unformatted** output values in a `WRITE` statement
- `[WRITE#]` bindings are used to generate calls for **formatted** output values in a `WRITE` statement

An IO module `FooIO` with a binding

```
PROCEDURE [WRITE] Write ( chan : IOChannel; value : Foo );
```

binds IO library procedure `Write()` to the `WRITE` statement in respect of type `Foo`.

Any unformatted output value of type `Foo` within a `WRITE` statement will then generate a call to procedure `FooIO.Write()`.

An IO module `FooIO` with a binding

```
PROCEDURE [WRITE#] WriteF ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; value : Foo );
```

binds IO library procedure `WriteF()` to the `WRITE` statement in respect of type `Foo`.

Any formatted output value of type `Foo` within a `WRITE` statement will then generate a call to procedure `FooIO.WriteF()`.

#### 10.3.2.1 WRITE with Explicit IO Channel

Given the following imports and declaration within a client module

```
IMPORT Foo, FooIO, IOChannel; VAR foo : Foo; file : IOChannel;
```

- a statement of the form `WRITE @file : foo` is resolved into a library call `FooIO.Write(file, foo)`
- a statement of the form `WRITE @file : #(fmt, foo)` is resolved into a call `FooIO.WriteF(file, fmt, foo)`

#### 10.3.2.2 WRITE with Default IO Channel

If the IO channel argument is omitted, default output channel primitive `_STDOUT` is automatically inserted. In order to resolve `_STDOUT` an appropriate IO library must be imported to bind an output channel to `_STDOUT` and make it visible within the current module scope. Import of module `StdIO` binds `StdIO.out()` to `_STDOUT`.

Given the following imports and declaration within a client module

```
IMPORT Foo, FooIO, StdIO; VAR foo : Foo;
```

- a statement of the form `WRITE foo` is resolved into a library call `FooIO.Write(StdIO.out(), foo)`
- a statement of the form `WRITE #(fmt, foo)` is resolved into a call `FooIO.WriteF(StdIO.out(), fmt, foo)`

#### 10.3.2.3 WRITE with Multiple Arguments

Given modules `Foo`, `Bar`, `Baz` and `Bam`, their respective IO modules `FooIO`, `BarIO`, `BazIO` and `BamIO` with bindings to `WRITE` for their respective types and the following imports and declaration within a client module

```
IMPORT Foo, FooIO, Bar, BarIO, Baz, BazIO, Bam, BamIO, StdIO;  
VAR foo : Foo; bar : Bar; baz : Baz; bam : Bam;
```

a statement of the form

```
WRITE foo, #(fmt1, bar), baz, #(fmt2, bam);
```

is resolved into a statement sequence

```
FooIO.Write(StdIO.out(), foo); BarIO.WriteF(StdIO.out(), fmt1, bar);  
BazIO.Write(StdIO.out(), baz); BarIO.WriteF(StdIO.out(), fmt2, bam);
```

## 10.4 Binding to Pervasives

### 10.4.1 Binding to Procedure APPEND

An ADT module `Foo` with a binding

```
PROCEDURE [APPEND] Append ( VAR a : Foo; values : ARGLIST OF Value );
```

binds ADT library procedure `Foo.Append()` to pervasive procedure `APPEND()` in respect of type `Foo`.

Any call to `APPEND()` with a first argument of type `Foo` is then resolved into a call to procedure `Foo.Append()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `APPEND(foo, v1, v2, v3)` is resolved into a library call `Foo.Append(foo, v1, v2, v3)`.

### 10.4.2 Binding to Procedure REMOVE

An ADT module `Foo` with a binding

```
PROCEDURE [REMOVE] Remove ( VAR a : Foo; keys : ARGLIST OF Keys );
```

binds ADT library procedure `Foo.Remove()` to pervasive procedure `REMOVE()` in respect of type `Foo`.

Any call to `REMOVE()` with a first argument of type `Foo` is then resolved into a call to procedure `Foo.Remove()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `REMOVE(foo, k1, k2, k3)` is resolved into a library call `Foo.REMOVE(foo, k1, k2, k3)`.

### 10.4.3 Binding to Function COUNT

An ADT module `Foo` with a binding

```
PROCEDURE [COUNT] count ( VAR a : Foo ) : LONGCARD;
```

binds ADT library function `Foo.count()` to pervasive function `COUNT()` in respect of type `Foo`.

Any invocation of `COUNT()` with an argument of type `Foo` is then resolved into a call to function `Foo.count()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `COUNT(foo)` is resolved into a library call `Foo.count(foo)`.

Within any given ADT module, bindings to `COUNT` and `LENGTH` are mutually exclusive.

### 10.4.4 Binding to Function LENGTH

An ADT module `Foo` with a binding

```
PROCEDURE [LENGTH] length ( VAR a : Foo ) : LONGCARD;
```

binds ADT library function `Foo.length()` to pervasive function `LENGTH()` in respect of type `Foo`.

Any invocation of `LENGTH()` with an argument of type `Foo` is then resolved into a call to function `Foo.length()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `LENGTH(foo)` is resolved into a library call `Foo.length(foo)`.

Within any given ADT module, bindings to `COUNT` and `LENGTH` are mutually exclusive.

### 10.4.5 Binding to Function FIRST

An ADT module `Foo` with a binding

```
PROCEDURE [FIRST] firstKey ( a : Foo ) : KeyType (* of Foo *);
```

binds ADT library function `Foo.firstKey()` to pervasive function `FIRST()` in respect of type `Foo`.

Any invocation of `FIRST()` with an argument of type `Foo` is then resolved into a call to function `Foo.firstKey()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `FIRST(foo)` is resolved into a library call `Foo.firstKey(foo)`.

### 10.4.6 Binding to Function LAST

An ADT module `Foo` with a binding

```
PROCEDURE [LAST] lastKey ( a : Foo ) : KeyType (* of Foo *);
```

binds ADT library function `Foo.lastKey()` to pervasive function `LAST()` in respect of type `Foo`.

Any invocation of `LAST()` with an argument of type `Foo` is then resolved into a call to function `Foo.lastKey()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo;
```

an invocation of the form `LAST(foo)` is resolved into a library call `Foo.lastKey(foo)`.

### 10.4.7 Binding to Function PREV

An ADT module `Foo` with a binding

```
PROCEDURE [PREV] prevKey ( VAR a : Foo; key : Key ) : Key;
```

binds ADT library function `Foo.prevKey()` to pervasive function `PREV()` in respect of type `Foo`.

Any invocation of `PREV()` with an argument of type `Foo` is then resolved into a call to function `Foo.prevKey()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo; key : Foo.Key;
```

an invocation of the form `PREV(foo, key)` is resolved into a library call `Foo.prevKey(foo, key)`.

### 10.4.8 Binding to Function NEXT

An ADT module `Foo` with a binding

```
PROCEDURE [NEXT] nextKey ( VAR a : Foo; key : Key ) : Key;
```

binds ADT library function `Foo.nextKey()` to pervasive function `NEXT()` in respect of type `Foo`.

Any invocation of `NEXT()` with an argument of type `Foo` is then resolved into a call to function `Foo.nextKey()`.

Given the following import and declaration within a client module

```
IMPORT Foo; VAR foo : Foo; key : Foo.Key;
```

an invocation of the form `NEXT(foo, key)` is resolved into a library call `Foo.nextKey(foo, key)`.

## 10.4.9 Binding to Macro TLIMIT

An ADT module `Foo` with a binding

```
CONST [TLIMIT] Capacity = 1000;
```

binds ADT library constant `Foo.Capacity` to pervasive macro `TLIMIT()` in respect of type `Foo`.

Given an import directive `IMPORT Foo;` within a client module,

an expression of the form `TLIMIT(Foo)` is replaced by library constant `Foo.Capacity`.

## 10.5 Binding to the Collation Table

A library module may bind an array constant to the language processor's internal collation table.

```
CONST [COLLATION] Order = { index0, index1, index2, ... index94 };
```

where value `Order[i]` defines the collation index of character `CHR(i+32)` for `i` in range `[0..94]`.

Such a library is called a collation library. Import of a collation library causes pervasive function `COLLATION()` and thereby all string comparisons to use the library defined order within the scope of the importing module.

## 10.6 Binding to Primitives

### 10.6.1 Binding to Primitive \_ATVALUE

An ADT module `Foo` with a binding

```
PROCEDURE [_ATVALUE] valueAtIndex ( VAR a : Foo; atIndex : LONGCARD ) : Value;
```

binds function `Foo.valueAtIndex()` to primitive `_ATVALUE` in respect of type `Foo`.

Any (internal) use of primitive `_ATVALUE` with a first argument of type `Foo` is then resolved into a library call to function `Foo.valueAtIndex()` during translation of syntax forms that are synthesised using primitive `_ATVALUE`.

### 10.6.2 Binding to Primitive \_KVALUE

An ADT module `Foo` with a binding

```
PROCEDURE [_KVALUE] valueForKey ( VAR a : Foo; key : Key ) : Value;
```

binds function `Foo.valueForKey()` to primitive `_KVALUE` in respect of type `Foo`.

Any (internal) use of primitive `_KVALUE` with a first argument of type `Foo` is then resolved into a library call to function `Foo.valueForKey()` during translation of syntax forms that are synthesised using primitive `_KVALUE`.

### 10.6.3 Binding to Primitive \_ATSTORE

An ADT module `Foo` with a binding

```
PROCEDURE [_ATSTORE] StoreAtIndex ( VAR a : Foo; atIndex : LONGCARD; value : Value );
```

binds procedure `Foo.StoreAtIndex` to primitive `_ATSTORE` in respect of type `Foo`.

Any (internal) use of primitive `_ATSTORE` with a first argument of type `Foo` is then resolved into a library call to procedure `Foo.StoreAtIndex` during translation of syntax forms that are synthesised using primitive `_ATSTORE`.

### 10.6.4 Binding to Primitive \_KVSTORE

An ADT module `Foo` with a binding

```
PROCEDURE [_KVSTORE] StoreKeyValue ( VAR a : Foo; key : Key; value : Value );
```

binds procedure `Foo.StoreKeyValue` to primitive `_KVSTORE` in respect of type `Foo`.

Any (internal) use of primitive `_KVSTORE` with a first argument of type `Foo` is then resolved into a library call to procedure `Foo.StoreKeyValue` during translation of syntax forms that are synthesised using primitive `_KVSTORE`.

### 10.6.5 Binding to Primitive `_ATINSERT`

An ADT module `Foo` with a binding

```
PROCEDURE [_ATINSERT] AtInsert ( VAR a : Foo; atIndex : LONGCARD; values : ARGLIST OF Value );
```

binds procedure `Foo.AtInsert` to primitive `_ATINSERT` in respect of type `Foo`.

Any (internal) use of primitive `_ATINSERT` with a first argument of type `Foo` is then resolved into a library call to procedure `Foo.AtInsert` during translation of syntax forms that are synthesised using primitive `_ATINSERT`.

### 10.6.6 Binding to Primitive `_ATREMOVE`

An ADT module `Foo` with a binding

```
PROCEDURE [_ATREMOVE] AtRemove ( VAR a : Foo; startIndex, endIndex : LONGCARD );
```

binds procedure `Foo.AtRemove` to primitive `_ATREMOVE` in respect of type `Foo`.

Any (internal) use of primitive `_ATREMOVE` with a first argument of type `Foo` is then resolved into a library call to procedure `Foo.AtRemove` during translation of syntax forms that are synthesised using primitive `_ATREMOVE`.

### 10.6.7 Binding to Primitive `_ALLOC`

A storage library module `MyStorage` with a binding

```
PROCEDURE [_ALLOC] Allocate ( VAR p : CAST ADDRESS; size : LONGCARD );
```

binds procedure `MyStorage.Allocate` to primitive `_ALLOC`.

Any (internal) use of primitive `_ALLOC` is then resolved into a library call to procedure `MyStorage.Allocate` during translation of `NEW` statements for types that do not provide type specific bindings to `NEW`.

### 10.6.8 Binding to Primitive `_DEALLOC`

A storage library module `MyStorage` with a binding

```
PROCEDURE [_DEALLOC] Deallocate ( VAR p : CAST ADDRESS );
```

binds procedure `MyStorage.Deallocate` to primitive `_DEALLOC`.

Any (internal) use of primitive `_DEALLOC` is then resolved into a library call to procedure `MyStorage.Deallocate` during translation of `RELEASE` statements for types that do not provide type specific bindings to `RELEASE`.

### 10.6.9 Binding to Primitive `_STDIN`

An IO module `MyIO` with a binding

```
PROCEDURE [_STDIN] stdIn : ArbitraryIOChannelType;
```

binds `MyIO.stdIn()` to primitive `_STDIN`. (Internal) use of `_STDIN` is then resolved to `MyIO.stdIn()`.

### 10.6.10 Binding to Primitive `_STDOUT`

An IO module `MyIO` with a binding

```
PROCEDURE [_STDOUT] stdOut : ArbitraryIOChannelType;
```

binds `MyIO.stdOut()` to primitive `_STDOUT`. (Internal) use of `_STDOUT` is then resolved to `MyIO.stdOut()`.



# Chapter 11

## Low-Level Facilities

Low-level facilities are provided by special module `UNSAFE`. Although presented as a library it is built into the language. Its facilities are potentially unsafe, their use may bypass the type safety of the language and they must therefore be used with caution. The module must be imported before its facilities can be used.

Module `UNSAFE` provides the following identifiers:

`BitsPerByte`, `BytesPerWord`, `BytesPerLongWord`, `BitsPerAddress`, `MachineTypeMaxBits`, `BitOpsMaxBits`,  
`BYTE`, `WORD`, `LONGWORD`, `ADDRESS`, `ADD`, `SUB`, `SETBIT`, `HALT`, `ADR`, `CAST`, `BIT`, `SHL`, `SHR`, `ASHR`,  
`BWNOT`, `BWAND`, `BWOR`.

### 11.1 Low-Level Constants

#### 11.1.1 `BitsPerByte`

Constant `BitsPerByte` represents the bit width of the smallest addressable machine unit of the target architecture measured in bits. Its value is therefore target architecture dependent. For the overwhelming majority of platforms in use this value will be eight.

Memory allocation in Modula-2 is strictly in units of eight bits and multiples thereof. On (legacy) targets where the smallest addressable machine unit is not eight bits, the mapping of type `OCTET` to *machine types* is implementation defined.

#### 11.1.2 `BytesPerWord`

Constant `BytesPerWord` represents the size of a machine register of the target architecture smaller than the largest machine register. Its value is target architecture dependent.

#### 11.1.3 `BytesPerLongWord`

Constant `BytesPerLongWord` represents the size of the largest machine register of the target architecture. Its value is target architecture dependent. If the target architecture does not support machine registers of different sizes, `BytesPerLongWord` is equal to `BytesPerWord`.

#### 11.1.4 `BitsPerAddress`

Constant `BitsPerAddress` represents the bit width of type `ADDRESS`.

#### 11.1.5 `MachineTypeMaxBits`

Constant `MachineTypeMaxBits` represents the bit width of the largest machine type.

#### 11.1.6 `BitOpsMaxBits`

Constant `BitOpsMaxBits` represents the bit width of the largest operand supported by the `UNSAFE` bit operations `ADD()`, `SUB()`, `SETBIT()`, `BIT()`, `SHL()`, `SHR()`, `ASHR()`, `BWNOT()`, `BWAND()` and `BWOR()`.

## 11.2 Low-Level Types

### 11.2.1 BYTE

Type `BYTE` is a *machine type*.

It represents the smallest addressable storage unit of the target architecture.

Its bit width is defined by constant `BitsPerByte`.

Its value range is `[0..POW2(BitsPerByte)-1]`.

Whole number literals are *compatible* with type `BYTE`.

### 11.2.2 WORD

Type `WORD` is a *machine type*.

It represents a storage unit equivalent to the size of a machine register of the target architecture.

Its bit width is defined by constants `BitsPerByte` and `BytesPerWord`.

Its value range is `[0..POW2(BitsPerByte*BytesPerWord)-1]`.

Whole number literals are *compatible* with type `WORD`.

### 11.2.3 LONGWORD

Type `LONGWORD` is a *machine type*.

It represents a storage unit equivalent to the size of the largest machine register of the target architecture.

Its bit width is defined by constants `BitsPerByte` and `BytesPerLongWord`.

Its value range is `[0..POW2(BitsPerByte*BytesPerLongWord)-1]`.

Whole number literals are *compatible* with type `LONGWORD`.

### 11.2.4 ADDRESS

Type `ADDRESS` is a (semi-abstract) reference type.

It represents the addressable memory space available to the Modula-2 runtime environment.

Its bit width is defined by constant `BitsPerAddress`.

Its value range is `[0..POW2(BitsPerAddress)-1]`.

Whole number literals and `NIL` are *compatible* with type `ADDRESS`.

#### 11.2.4.1 Address Mapping

On platforms where the smallest addressable storage unit is eight bits, type `ADDRESS` represents machine addresses of the target architecture. On (legacy) platforms where the smallest addressable unit is not eight bits, the type represents abstract addresses that need to be mapped to the platform's actual address space. On such platforms, address mapping is implementation defined.

Regardless of the underlying architecture, type `ADDRESS` is classified as a *machine type*.

#### 11.2.4.2 Dual Representation

Type `ADDRESS` exhibits type duality. It is presented both as a pointer type and as an octet sequence. It may thus be thought of as having two overlapping definitions

```

TYPE ADDRESS = (* Pseudo-Definition *)
| POINTER TO OCTET
| OCTETSEQ [POW2(BitsPerAddress)]
END; (* ADDRESS *)

```

### 11.2.4.2.1 Presentation as a Pointer

An entity `a` of type `ADDRESS` may be dereferenced using the `^` operator. An expression of the form `a^` is of type `OCTET` and represents the octet value stored at address `a`.

```
adr := UNSAFE.ADR(x);
WRITE "octet value at address ", adr, " is ", adr^;
```

### 11.2.4.2.2 Presentation as a Stream

An entity `a` of type `ADDRESS` may also be dereferenced by subscript. An expression of the form `a[n]` is of type `OCTET` and represents the octet value stored at address `a + n`, where `n` is an offset of type `LONGCARD`. Negative indices are not supported.

```
adr := UNSAFE.ADR(x);
WRITE "octet value at address ", adr, "[", offset, "] is ", adr[offset];
```

## 11.2.5 Casting Formal Types

Import of module `UNSAFE` enables the use of casting formal type syntax `CAST ADDRESS` and `CAST OCTETSEQ` within the importing module scope. Without such import the syntax is unavailable and any attempt to use it will cause a syntax error at compile time.

### 11.2.5.1 CAST ADDRESS

An argument passed to a parameter of formal type `CAST ADDRESS` is cast to type `ADDRESS`. That is, within the body of the procedure, the argument is interpreted as a value of type `ADDRESS`. It must be of a *pointer type*.

```
PROCEDURE Allocate ( VAR ptr : CAST ADDRESS; size : LONGCARD );
...
TYPE FooPtr = POINTER TO Foo; VAR foo : FooPtr;
Allocate(foo, TSIZE(Foo));
```

All *pointer types* are *passing compatible* to formal type `CAST ADDRESS`.

### 11.2.5.2 CAST OCTETSEQ

An argument passed to a parameter of formal type `CAST OCTETSEQ` is cast to an *octet sequence*<sup>\*</sup>. That is, within the body of the procedure, the parameter is interpreted as a stream of values of type `OCTET`, individually addressable by subscript. The argument may be of any type.

```
PROCEDURE HexDump ( dataSeq : CAST OCTETSEQ );
...
VAR foo : Foo; bar : Bar; baz : Baz;
HexDump(foo), HexDump(bar); HexDump(baz);
```

Any entity regardless of its type is *passing compatible* to formal parameters of type `OCTETSEQ`, but a parameter of type `OCTETSEQ` is *passing compatible* only to formal parameters of type `OCTETSEQ`.

When an argument is passed to a parameter of formal type `CAST OCTETSEQ`, the *allocation size* of the argument is passed as a hidden parameter of type `LONGCARD` immediately before the casting parameter.

```
PROCEDURE HexDump ( (*hidden size : LONGCARD;*) dataSeq : CAST OCTETSEQ );
```

The value of the hidden parameter may be obtained within the procedure body by calling function `LENGTH` with the identifier of the casting parameter as its argument.

```
LENGTH(dataSeq) (* number of octets passed to dataSeq *)
```

<sup>\*</sup>This replaces the implicit casting semantics of `ARRAY OF WORD` and `ARRAY OF LOC` in earlier versions of Modula-2.

Operations on parameters of type `OCTETSEQ` are strictly limited to `[ ]` subscript, `FOR` iteration, `ADR()`, `CAST()` and `LENGTH()`. The limitation does not apply to the octet values of an *octet sequence* parameter.

### 11.2.5.2.1 Addressing by Subscript

The values of an *octet sequence* parameter are addressable by subscript. Negative indices are not supported.

```
WRITE "octet value at index ", index, " is ", dataSeq[index];
```

### 11.2.5.2.2 Iteration by FOR Loop

An *octet sequence* parameter is iterable by `FOR` loop.

```
PROCEDURE HexDump ( VAR dataSeq : CAST OCTETSEQ );
BEGIN
  FOR value IN dataSeq DO
    WRITE value, " "
  END (* FOR *)
  WRITE "\n", LENGTH(dataSeq), " values\n"
END HexDump;
```

## 11.3 Low-Level Procedures

### 11.3.1 ADD

Procedure `ADD` interprets the bit patterns of its operands as unsigned numbers and adds the value of the second to the first operand, ignoring overflow.

```
PROCEDURE ADD ( VAR x : T1; y : T2 );
```

where  $T1, T2 \in \tau_{builtin} \setminus \tau_{real} \wedge tsize\ T1 \geq tsize\ T2$

### 11.3.2 SUB

Procedure `SUB` interprets the bit patterns of its operands as unsigned numbers and subtracts the value of the second from the first operand, ignoring underflow.

```
PROCEDURE SUB ( VAR x : T1; y : T2 );
```

where  $T1, T2 \in \tau_{builtin} \setminus \tau_{real} \wedge tsize\ T1 \geq tsize\ T2$

### 11.3.3 SETBIT

Procedure `SETBIT` sets the bit at the zero-based index given by its second argument of the value given by its first argument to the bit value given by its third argument.

```
PROCEDURE SETBIT ( VAR target : T1; bitIndex : T2; bit : BOOLEAN );
```

where  $T1, T2 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge 0 \leq bitIndex < 8 \cdot tsize\ T1$

The bit index of the least significant bit is always zero.

### 11.3.4 HALT

Procedure `HALT` aborts the running program and passes an exit value to its host environment. On host environments that do not support an exit value, the exit value is discarded. On host environments that support an exit value, the range and meaning of exit values is dependent on the host environment.

```
PROCEDURE HALT ( exitValue : T );
```

where  $T \in \tau_{whole}$

## 11.4 Low-Level Functions

### 11.4.1 ADR

Function `ADR` returns the address of its argument.

```
PROCEDURE ADR ( value : T ) : ADDRESS;
```

where  $T \in \tau_{any}$

### 11.4.2 CAST

Function `CAST` represents an unsafe type transfer operation. It returns the value of its second argument, interpreted as if it was of the type given by its first argument, regardless of whether the value makes sense for the target type or not.

```
PROCEDURE CAST ( TypeIdent; value : T1 ) : T2; (* pseudo-code *)
```

where  $T1 \in \tau_{any} \wedge \text{typeIdent} = id\ T2 \wedge tsize\ T1 \leq tsize\ T2$

If the second argument is a compile time expression, then it must be any of `NIL`, `TRUE` or `FALSE`, or it must be an explicitly typed expression of the form `expr :: T`.

If the **allocation size** of the second argument is smaller than the **allocation size** of the target type, the higher bits will be filled with zeroes up to the bit width of the target type.

### 11.4.3 BIT

Function `BIT` returns `TRUE` if the bit at the zero-based index given by its second argument of the value given by its first argument is set, otherwise `FALSE`.

```
PROCEDURE BIT ( value : T1; bitIndex : T2 ) : BOOLEAN;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge 0 \leq \text{bitIndex} < 8 \cdot tsize\ T1$

The bit index of the least significant bit is always zero.

### 11.4.4 SHL

Function `SHL` returns the value of its first argument bit-shifted to the left by the number of positions passed in its second argument.

```
PROCEDURE SHL ( value : T1; shiftFactor : T2 ) : T3;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge T3 = T1$

Bits that are shifted out to the left are discarded and will not cause overflow.

### 11.4.5 SHR

Function `SHR` returns the value of its first argument bit-shifted **logically** to the right by the number of positions passed in its second argument.

```
PROCEDURE SHR ( value : T1; shiftFactor : T2 ) : T3;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge T3 = T1$

Bits that are shifted out to the right are discarded and will not cause underflow.

### 11.4.6 ASHR

Function `ASHR` returns the value of its first argument bit-shifted **arithmetically** to the right by the number of positions passed in its second argument.

```
PROCEDURE ASHR ( value : T1; shiftFactor : T2 ) : T3;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge T3 = T1$

Bits that are shifted out to the right are discarded and will not cause underflow.

### 11.4.7 BWNOT

Function `BWNOT` returns the bitwise logical negation of its argument.

```
PROCEDURE BWNOT ( value : T1 ) : T2;
```

where  $T1 \in \tau_{builtin} \wedge T2 = T1$

### 11.4.8 BWAND

Function `BWAND` returns the bitwise logical conjunction of its first argument and a bit mask given by its second argument.

```
PROCEDURE BWAND ( value : T1; mask : T2 ) : T3;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge tsize\ T2 = tsize\ T1 \wedge T3 = T1$

### 11.4.9 BWOR

Function `BWOR` returns the bitwise logical disjunction of its first argument and a bit mask given by its second argument.

```
PROCEDURE BWOR ( value : T1; mask : T2 ) : T3;
```

where  $T1 \in \tau_{builtin} \wedge T2 \in \tau_{cardinal} \wedge tsize\ T2 = tsize\ T1 \wedge T3 = T1$

## 11.5 Restrictions

Procedures and functions provided by module `UNSAFE` may not be assigned and may not be passed as arguments to any procedure, function or macro.

# Chapter 12

## Pragma Facilities

Pragmas are non-semantic directives – instructions to the language processor to control or influence the compilation process but do not alter the semantics of the compiling source code. There are two kinds:

- language defined pragmas
- implementation defined pragmas

### 12.1 Pragma Symbol Naming

- Pragma symbols of language defined pragmas are always in all-uppercase
- Pragma symbols of implementation defined pragmas may **not** be in all-uppercase
- The implementation prefix matches constant `Impl.ShortName`
- Implementation prefix and implementation defined pragma symbols follow the syntax of `StdIdent`

### 12.2 Language Defined Pragmas

There are five language defined pragmas.

#### 12.2.1 Pragma **INLINE**

An `INLINE` pragma may be placed before the semicolon that terminates a procedure header. It represents a request to inline calls to a procedure so marked. The request is a mandate for functions that return a property. Other requests may be declined, but should generally be fulfilled within reason\*. When a request is declined, a compile time informational message is issued.

```
InlinePragma := '<*' INLINE '*>' ;
```

```
(*Macro*) PROCEDURE colour ( point : Point ) : Colour <*INLINE*>;
```

#### 12.2.2 Pragma **DEPRECATED**

A `DEPRECATED` pragma may follow the identifier of a constant, type, variable, procedure or function definition or declaration and marks the identifier deprecated. When such an identifier is used, a compile time warning is issued. A compiler switch may be provided to promote the warning to an error.

```
InlinePragma := '<*' DEPRECATED '*>' ;
```

```
PROCEDURE Foo <*DEPRECATED*> ( bar : Bar );
```

---

\*The implementors of a compiler backend generally know better when to optimise than the users of their product.

### 12.2.3 Pragma PRIVATETO

A `PRIVATETO` pragma may follow the identifier in the header of a definition module and marks the module for private use by modules listed in its body. When such a module is imported by any module not listed, a compile time warning is issued. A compiler switch may be provided to promote the warning to an error.

```
InlinePragma := '<*' PRIVATETO '=' identList '*>' ;
```

```
DEFINITION MODULE Filesys0 <*PRIVATETO=Filesys*>;
```

### 12.2.4 Pragma FFI

An `FFI` pragma may follow the module identifier in the header of a definition module and establishes the calling convention of the specified foreign API, language and its execution environment for the module.

```
FFIPragma := '<*' FFI '=' ForeignAPISpecifier '*>' ;  
ForeignAPISpecifier := '"C"' | '"CLR"' | '"JVM"' ;
```

```
(* Interface to the C stdio library *)
```

```
DEFINITION MODULE CStdIO <*FFI="C"*>;
```

### 12.2.5 Pragma FFIDENT

An `FFIDENT` pragma may follow the identifier of a constant, type, variable, procedure or function definition or declaration to map the identifier to the foreign API identifier specified in the pragma body.

```
FFIdentPramga := '<*' FFIDENT '=' ForeignIdentifier '*>' ;  
alias ForeignIdentifier = QuotedLiteral ;
```

```
(* Interface to an OpenVMS SMG library routine *)
```

```
PROCEDURE PasteVirtualDisplay <*FFIDENT="SMG$PASTE_VIRTUAL_DISPLAY"*>  
  ( displayID, pasteboardID : INTEGER; row, column : INTEGER ) : CARDINAL;
```

## 12.3 Implementation Defined Pragas

Implementation defined pragmas are specific to a language processor and should therefore be ignored by other language processors. An implementation defined pragma may be preceded with an implementation specific prefix in order to distinguish it from other implementation defined pragmas for other processors that may use the same pragma symbol. When a processor does not understand an implementation defined pragma it will emit an informational, warning, error or fatal error message depending on the pragma's message mode suffix.

```
ImplDefinedPragma :=  
  '<*' ( implPrefix '.' )? pragmaSymbol ( '=' constExpr )? '|' ctMsgMode '*>' ;  
alias implPrefix, pragmaSymbol = <implementation-defined> ; /* follows StdIdent syntax */  
ctMsgMode := INFO | WARN | ERROR | FATAL ;
```

Use of an implementation defined pragma of a fictional compiler is shown below:

```
<*JollyM2.UnrollLoops=TRUE|WARN*>  
FOR plane IN array DO  
  FOR row IN plane DO  
    FOR col IN row DO  
      ...  
    END (* FOR *)  
  END (* FOR *)  
END; (* FOR *)  
<*JollyM2.UnrollLoops=FALSE|WARN*>
```



# Terms of Reference

## Allocation Size

The **allocation size** of a type  $T$ , denoted as  $tsize\ T$  is the size of the memory required to allocate an instance of  $T$ . It is measured in units of 8 bits called octets.

## Capacity

The **capacity** of a collection  $c$  is the maximal number of values that can be stored in  $c$ . Its value is determined by the type of  $c$ .

**def**  $capacity\ c = tlimit\ T$  where  $c \in T$

The **capacity** of a *pass-by-value* open array parameter  $p_{val}$  is equivalent to the **cardinality** or **value count** of the collection passed to  $p_{val}$ .

**def**  $capacity\ p_{val} = count\ c$  where  $c$  is the collection passed to  $p_{val}$

The **capacity** of a *pass-by-reference* open array parameter  $p_{ref}$  is equivalent to the **capacity** of the collection passed to  $p_{ref}$ .

**def**  $capacity\ p_{ref} = capacity\ c$  where  $c$  is the collection passed to  $p_{ref}$

## Capacity Limit

The **capacity limit** of a **collection type**  $T$ , denoted as  $tlimit\ T$  is the maximum number of items that an instance of  $T$  can store. A **capacity limit** of zero indicates that the **collection type** does not impose any hard limit.

## Cardinality

The **cardinality** of a set  $A$ , denoted as  $|A|$  or  $card\ A$  is a measure of the number of elements in  $A$ . In this specification, the definition is extended to include collections, open array parameters and variadic argument lists.

**def** the **cardinality** of a collection  $c$  is the number of values stored in  $c$

**def** the **cardinality** of an open array parameter  $p$  is that of the collection passed in  $p$

**def** the **cardinality** of a variadic argument list  $v$  is the number of arguments passed in  $v$

## Compatibility

**Compatibility** is a property that determines whether one entity may be assigned to, copied to, passed to or used in an expression with another entity.

**def** a literal is fully **compatible** with type  $T$  if it is **assignment**, **copy**, **by-value** and **by-reference passing compatible** to, and **expression compatible** with type  $T$

**def** type  $T_1$  is fully **compatible** with type  $T_2$  if it is **assignment**, **copy**, **by-value** and **by-reference passing compatible** to, and **expression compatible** with type  $T_2$

## Compatibility, Assignment

**Assignment compatibility** is a property that determines whether one entity may be assigned to another entity.

**def** a literal is **assignment compatible** to type  $T$  if it may be assigned to an L-value of type  $T$

**def** type  $T_1$  is **assignment compatible** to type  $T_2$   
if an R-value of type  $T_1$  may be assigned to an L-value of type  $T_2$

## Compatibility, Copy

**Copy compatibility** is a property that determines whether one entity may be copied to another entity.

**def** a literal is **copy compatible** to type  $T$  if it may be copied to a value of type  $T$

**def** type  $T_1$  is **copy compatible** to type  $T_2$   
if an R-value of type  $T_1$  may be copied to an L-value of type  $T_2$

## Compatibility, Passing

Parameter **passing compatibility** is a property that determines whether an entity may be passed to a formal parameter.

**def** a literal is **by-value passing compatible** to type  $T$   
if it may be passed to a formal by-value parameter of type  $T$

**def** a literal is **by-reference passing compatible** to type  $T$   
if it may be passed to a formal `CONST` parameter of type  $T$

**def** type  $T_1$  is **by-value passing compatible** to type  $T_2$   
if a value of type  $T_1$  may be passed to a formal by-value parameter of type  $T_2$

**def** type  $T_1$  is **by-reference passing compatible** to type  $T_2$   
if a value of type  $T_1$  may be passed to a formal by-reference parameter of type  $T_2$

## Compatibility, Expression

**Expression compatibility** is a property that determines whether an entity may be used together with another entity as operands in a binary expression.

**def** a literal is **expression compatible** to type  $T$  in respect of operation  $M$  if it may be used together with a value of type  $T$  as the operands in a binary expression with any operator representing operation  $M$

**def** types  $T_1$  and  $T_2$  are **expression compatible** in respect of operation  $M$  if a value of type  $T_1$  and a value of type  $T_2$  may be used together as the operands in a binary expression with any operator representing operation  $M$

## Constant Expression

A **constant expression** is an expression that is computable at compile time. It does not reference any variables nor invoke any library functions, nor denote any real number operations except unary minus of a real number literal. A value constructor that contains only constant expressions is itself a constant expression.

## Fractional Part

The **integral part** of a real number  $x$  is the value that represents the digits of  $x$  before the decimal point if  $x$  was to be written out in decimal notation without an exponent.

**def**  $frac\ x = x - int\ x$

## Integral Part

The **integral** part of a real number  $x$  is the value that represents the digits of  $x$  before the decimal point if  $x$  was to be written out in decimal notation without an exponent.

**def**  $int\ x = sgn\ x \cdot entier\ abs\ x$

## Largest Integer or Entier

The **entier** value of a real number  $x$  is the largest integer less than  $x$ .

**def**  $\text{entier } x = \max i \text{ where } i \in \{\mathbb{Z} \mid i < x\}$

## Length

The **length** of a character string  $s$  is the number of characters stored in  $s$  excluding its NUL terminator.

**def**  $\forall s \in: \tau_{\text{string}} : \text{length } s = \min n \text{ where } n \in \{\mathbb{N} \mid s_n = \text{ASCII.NUL}\}$

The **length** of an **octet sequence**  $s$  is the **allocation size** of the actual parameter  $p$  passed in to a formal **octet sequence** parameter.

**def**  $\forall s \in: \tau_{\text{octetseq}} : \text{length } s = \text{capacity } p \text{ where } p \text{ is passed to } s$

## Number Sets

In this specification abstract number sets are defined as follows:

**def** the set of the abstract **natural numbers**  $\mathbb{N} = \{0, 1, 2, 3 \dots \infty\}$

**def** the set of the abstract **ordinal numbers**  $\mathbb{O} = \{0, 1, 2, 3 \dots \omega, \omega + 1, \omega + 2 \dots\}$

**def** the set of the abstract **whole numbers**  $\mathbb{Z} = \{-\infty \dots -3, -2, -1, 0, +1, +2, +3 \dots +\infty\}$

## Odd Value

The **odd value** of a whole number  $i$  indicates whether  $i$  is odd.

**def**  $\text{odd } i = \text{true} \text{ for } i \in \{\mathbb{Z} \mid \text{abs } i \bmod 2 = 1\}$

**def**  $\text{odd } i = \text{false} \text{ for } i \in \{\mathbb{Z} \mid \text{abs } i \bmod 2 = 0\}$

## Signum Value

The **signum** or **sgn** value of a signed number  $x$  indicates the sign of  $x$ .

**def**  $\text{sgn } x = 1 \text{ for } x \in \{\mathbb{R} \mid x > 0\}$

**def**  $\text{sgn } x = 0 \text{ for } x \in \{\mathbb{R} \mid x = 0\}$

**def**  $\text{sgn } x = -1 \text{ for } x \in \{\mathbb{R} \mid x < 0\}$

## Type, Any

A type is a classification of storage units defined by a set of three properties: storage representation, value range and semantics.

The set of all types is denoted  $\tau_{\text{any}}$ .

## Type, Builtin

A **builtin type** is a type that is built into the language core, that is, either predefined or provided by builtin module `UNSAFE`.

The set of all **builtin types** is denoted  $\tau_{\text{builtin}}$ .

**def**  $\forall \tau \in \{\tau_{\text{any}} \mid \text{builtin } \tau\} \Rightarrow \tau \in \tau_{\text{builtin}}$

## Type, Countable

A **countable type** is a type that represents a set of values with a 1:1 correspondence to the first  $m$  **ordinal numbers**  $\mathbb{O}$  where  $m \in \mathbb{O}$ .

**def** *countable*  $T$  if  $\exists f : T \rightarrow \mathbb{O}$

The set of all **countable types** is denoted  $\tau_{countable}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{countable } \tau\} \Rightarrow \tau \in \tau_{countable}$

## Type, Enumerated

An **enumerated type** is a type that represents a finite ordered set of identifiers.

**def** *enumerated*  $\tau$  if  $\forall e \in: \{\tau \mid \text{is-identifier } e\} \wedge \exists f : \tau \rightarrow \mathbb{N}$

The set of all **enumerated types** is denoted  $\tau_{enum}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{enumerated } \tau\} \Rightarrow \tau \in \tau_{enum}$

## Type, Machine

A **machine type** is a type that represents storage units that match the storage units of the target architecture and have modular arithmetic semantics.

The set of all **machine types** is denoted  $\tau_{machine}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{is-machine-type } \tau\} \Rightarrow \tau \in \tau_{machine}$

## Type, Signed

A **signed type** is a numeric type that represents both positive and negative scalar numeric values.

**def** *signed*  $\tau$  if  $\exists x, y \in: \{\tau \mid x < 0 \wedge y > 0\}$

The set of all **signed types** is denoted  $\tau_{signed}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{signed } \tau\} \Rightarrow \tau \in \tau_{signed}$

## Type, Unsigned

An **unsigned type** is a numeric type that represents non-negative scalar numeric values.

**def** *unsigned*  $\tau$  if  $\forall x \in: \{\tau \mid x \geq 0\}$

The set of all **unsigned types** is denoted  $\tau_{unsigned}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{unsigned } \tau\} \Rightarrow \tau \in \tau_{unsigned}$

## Type, Whole Number

A **whole number type** is a numeric type that represents a subset of the set of integers  $\mathbb{Z}$ .

**def** *whole*  $\tau$  if  $\forall n \in: \{\tau \mid n \in \mathbb{Z}\}$

The set of all **whole number types** is denoted  $\tau_{whole}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{whole } \tau\} \Rightarrow \tau \in \tau_{whole}$

## Type, Real Number

A **real number type** is a numeric type that represents a subset of the set of real numbers  $\mathbb{R}$ .

**def** *real*  $\tau$  if  $\forall r \in: \{\tau \mid r \in \mathbb{R}\}$

The set of all **real number types** is denoted  $\tau_{real}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{real } \tau\} \Rightarrow \tau \in \tau_{real}$

## Type, Cardinal

A **cardinal type** is a numeric type that represents a subset of the unsigned **whole numbers**  $\mathbb{Z}^+$ .

**def** *cardinal*  $\tau$  if *unsigned*  $\tau \wedge$  *whole*  $\tau$

The set of all **cardinal number types** is denoted  $\tau_{cardinal}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{cardinal } \tau\} \Rightarrow \tau \in \tau_{cardinal}$

## Type, Integer

An **integer type** is a numeric type that represents a subset of the signed **whole numbers**  $\mathbb{Z}$ .

**def** *integer*  $\tau$  if *signed*  $\tau \wedge$  *whole*  $\tau$

The set of all **integer types** is denoted  $\tau_{integer}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{integer } \tau\} \Rightarrow \tau \in \tau_{integer}$

## Type, Scalar

A **scalar type** is a numeric type that represents scalar values.

The set of all **scalar types** is denoted  $\tau_{scalar}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{scalar } \tau\} \Rightarrow \tau \in \tau_{scalar}$

## Type, Collection

A **collection type** represents  $n$ -tuples of an arbitrary value type, where  $n$  is bounded by its **capacity**.

The set of all **collection types** is denoted  $\tau_{collection}$ .

**def**  $\forall \tau \in \{\tau_{any} \mid \text{collection } \tau\} \Rightarrow \tau \in \tau_{collection}$

## Type, Array

An **array type** is an ordered **collection type** whose values are mapped to the set of the first  $m$  **ordinal numbers**  $\mathbb{O}$  where  $m - 1$  is the **capacity limit** of the **array type**.

The set of all **array types** is denoted  $\tau_{array}$ .

**def**  $\forall \tau \in \{\tau_{collection} \mid \text{array } \tau\} \Rightarrow \tau \in \tau_{array}$

## Type, String

A **string type** is an **array type** whose value type is a character type.

The set of all **string types** is denoted  $\tau_{string}$ .

**def**  $\forall \tau \in \{\tau_{array} \mid \text{string } \tau\} \Rightarrow \tau \in \tau_{string}$

## Type, Record

The set of all **record types** is denoted  $\tau_{record}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{any} \mid \text{record } \tau\} \Rightarrow \tau \in \tau_{record}$

## Type, Extensible Record

The set of all **extensible record types** is denoted  $\tau_{extrec}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{record} \mid \text{extensible } \tau\} \Rightarrow \tau \in \tau_{extrec}$

## Type, Extensible Record Pointer

An **extensible record pointer type** is a non-opaque **pointer type** whose target type is an **extensible record type**.

$\boxed{\text{def}} \quad \tau_{recptr} = \{\tau \in \tau_{pointer} \setminus \tau_{opaque} \mid \text{target-of } \tau \in \tau_{extrec}\}$

The set of all **extensible record pointer types** is denoted  $\tau_{recptr}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{pointer} \mid \text{is-recptr } \tau\} \Rightarrow \tau \in \tau_{recptr}$

## Type, Octet Sequence

Casting formal type `OCTETSEQ` is formally called the **octet sequence type** and denoted  $\tau_{octetseq}$ .

## Type, Opaque

An **opaque type** is a **pointer type** whose identifier is visible upon import but whose target type is hidden within the implementation part of the library module that institutes it.

The set of all **opaque types** is denoted  $\tau_{opaque}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{pointer} \mid \text{is-opaque } \tau\} \Rightarrow \tau \in \tau_{opaque}$

## Type, Open Array

An **open array type** is a formal **array type** whose **capacity** is indeterminate at compile time.

The set of all **open array types** is denoted  $\tau_{openarray}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{formal} \mid \text{is-open-array } \tau\} \Rightarrow \tau \in \tau_{openarray}$

## Type, Variadic Parameter List

A **variadic parameter list** is a formal **collection type** whose **cardinality** is indeterminate at compile time.

The set of all **variadic parameter lists** is denoted  $\tau_{arglist}$ .

$\boxed{\text{def}} \quad \forall \tau \in \{\tau_{formal} \mid \text{is-variadic-list } \tau\} \Rightarrow \tau \in \tau_{arglist}$

## Value Count

The **value count** of an entity  $e$  is synonym with the **cardinality** of  $e$ .

## Wirthian Macro

A **Wirthian macro** is a built-in syntactic entity whose occurrence is replaced with an appropriate library call, possibly filling in omitted arguments. The macro may be a statement or a built-in procedure or function. The mapped-to library must be explicitly imported.\*

\*Classic examples of Wirthian macros are procedures `NEW` and `DISPOSE` in earlier versions of Modula-2.

# Appendix A

## Managing Technical Debt

Technical debt is a metaphor for the sum total consequences of improper (software) design and implementation. Such deficiencies may be unintentional, or they may well be intentional in an attempt to shorten time to delivery. In either case, resulting deficiencies tend to accumulate over time until they reach a critical point where further development and maintenance on the software is severely impaired.

The metaphor suggests – analogous to financial debt – that (1) technical debt has to be paid down over time and with interest, and (2) interest will grow exponentially if the debt is not paid down. If technical debt is left unchecked for too long, the software may become unmaintainable. Eventually, the time and cost to reduce the deficiencies to a manageable level may vastly outpace the time and cost to rewrite the software from scratch.

In many organisations it is next to impossible to obtain the resources required to do proper maintenance on larger software projects without quantifying the debt, its financial impact and the cost required to reduce it. But without documenting the technical debt first, it is impossible to obtain that data and present figures with any confidence. Documenting and reporting of technical debt is thus a necessary prerequisite to managing the debt.

### A.1 Documenting Debt

Modula-2 provides a facility to document technical debt directly within the source code. The facility is incorporated into the language syntax so that documented issues become machine readable for automated report generation. A reporting tool may then generate reports on the weight, quantity and location of technical debt within a code base directly from its source code. A simple report writer may be built into the language processor. For more complex analysis an external report writer may be used.

### A.2 Syntax

A `TO DO` list is a machine readable directive to document technical debt directly within the source code. It may be placed wherever a definition, a declaration or a statement can occur. It may be empty, or contain a tracking reference of an external issue tracking system, and a list of tasks with descriptions and effort estimations.

```
toDoList := TO DO ( trackingRef? taskToDo ( ';' taskToDo )* END )? ;  
trackingRef := '(' issueId ( ',' severity ',' description )? ')' ;  
taskToDo := description ( ',' estimatedTime timeUnit )? ;  
alias issueId, severity, estimatedTime = NumberLiteral ;  
alias description = StringLiteral ;  
alias timeUnit = StdIdent ; /* must be any of w, d, or h */
```

### A.3 Reporting Debt

The language processor must report any `TO DO` list with line number as an informational compile time message and any syntax violation within as a compile time error. It must further report the total number of `TO DO` lists found in a compilation unit. Any further analysis and reporting is implementation defined. It is recommended to implement more complex analysis and reporting as a separate reporting tool outside of the language processor.

## A.4 Examples

### A.4.1 TO DO without Arguments

The arguments may be omitted from a `TO DO` list altogether.

```
PROCEDURE TitleCaseTransform ( VAR s : ARRAY OF CHAR );
BEGIN
  FOR index, char IN s DO
    TO DO
  END (* FOR *)
END TitleCaseTransform;
```

### A.4.2 TO DO with Issue Tracking

A tracking reference of an external issue tracking system may be included in a `TO DO` list.

```
PROCEDURE skipBlockComment ( infile : Infile ) : Token;
  TO DO (1337, 2 (*minor*), "empty comment not recognised")
    "verify loop exit conditions", 1h;
    "fix and test", 1h
  END; (* TO DO *)
BEGIN
```

A tracking reference may refer to another at a different location while omitting its severity and description.

```
  TO DO (1337)
    "Fix: move increment to the end of the loop"
  END; (* TO DO *)
```

### A.4.3 TO DO without Issue Tracking

The tracking reference may be omitted in a `TO DO` list.

```
TYPE DynString = POINTER TO StringDescriptor;
TO DO
  "bindings to NEW and RETAIN", 2d;
  "bindings to @ATVALUE, @ATSTORE, @LENGTH", 2d;
  "bindings to APPEND, @ATINSERT, @ATREMOVE", 3d;
  "bindings to READ and WRITE, using template", 2d;
  "unit testing", 2d
END; (* TO DO *)
```

## A.5 Sample Report

```
$ m2tdr --summary --proj m2bsk
Modula-2 technical debt summary report for project m2bsk
found 14 issues with 39 tasks in 9 modules, thereof
  5 issues of weight 3 (major) with 23 tasks, est. 338 hours,
  7 issues of weight 2 (minor) with 12 tasks, est. 121 hours,
  2 issues of weight 1 (cosmetic) with 4 tasks, est. 19 hours;
found further 26 untracked tasks in 21 modules, est. 312 hours.
Total estimated effort for 65 tasks: 790 hours (avg. 12 hours/task).
```



## Appendix B

# Implementation Parameters

Module `Impl` provides implementation specific constants. Its provision is mandatory. Where any of the constants are dependent on user selectable compiler options, the module may be implemented as a built-in module.

### B.1 Identity

Constant	Type	Meaning
ShortName	String Literal	short name of the language processor
LongName	String Literal	long name of the language processor
MajorVersion	Whole Number	major version of the language processor
MinorVersion	Whole Number	minor version of the language processor
SubMinorVersion	Whole Number	sub-minor version of the language processor
BuildNumber	Whole Number	build number of the language processor
HostEnvironment	String Literal	name of the host environment or operating system

**Table B.1:** Constants indicating the implementation identity

### B.2 Capability Flags

Boolean Constant	indicates whether language processor supports ...
SupportsM2BSK	Modula-2 R10 Bootstrap Kernel (M2BSK) subset
SupportsM2R10	Modula-2 R10 (M2R10) full specification
SupportsUnicode	type <code>UNICHAR</code> and its operations
SupportsUtf8Source	source files encoded in UTF-8
SupportsCFFI	C foreign function interface and <code>&lt;*FFI="C"&gt;</code> pragma
SupportsCLRFFI	Microsoft CLR FFI and <code>&lt;*FFI="CLR"&gt;</code> pragma
SupportsJVMFFI	Java Virtual Machine FFI and <code>&lt;*FFI="JVM"&gt;</code> pragma

**Table B.2:** Constants indicating implementation capabilities

### B.3 Implementation Limits

Whole Number Constant	indicates ...	required
MaxIdentLength	maximum significant length of identifiers	$\geq 31$
MaxNumLiteralLength	maximum length of number literals	$\geq 40$
MaxStrLiteralLength	maximum length of string literals	$\geq 120$
MaxLineCounter	maximum value of line counter for error messages	$\geq 32000$
MaxColumnCounter	maximum value of column counter for error messages	$\geq 160$
MaxEnumValues	maximum number of values of an enumeration type	$\geq 4096$
MaxSetElements	maximum number of elements in an enumerated set	$\geq 128$
MaxProcNestLevel	maximum nesting level of local procedures	$\geq 2$

**Table B.3:** Constants indicating implementation limits

# Appendix C

## Target Parameters

Module `Ttgt` provides target specific constants. Its provision is mandatory. Where any of the required constants are dependent on user selectable compiler options, the module may be implemented as a built-in module.

### C.1 Identity

Constant	Type	Meaning
ShortName	String Literal	short name of the target
LongName	String Literal	long name of the target
MajorVersion	Whole Number	major version of the code generator for this target
MinorVersion	Whole Number	minor version of the code generator for this target
SubMinorVersion	Whole Number	sub-minor version of the code generator for this target

**Table C.1:** Constants indicating the target identity

### C.2 Classification

Boolean Constant	indicates whether target ...
IsProcessor	is a hardware architecture
IsVirtualProcessor	Is a processor independent assembler backend
IsVirtualMachineHost	Is a virtual machine host and runtime environment
IsHigherLevelLanguage	Is a language processor for a higher level programming language

**Table C.2:** Constants indicating target classification

### C.3 Characteristics

Boolean Constant	indicates whether ...
IsBigEndian	target uses big-endian byte order
IsLittleEndian	target uses little-endian byte order
SupportsTCE	code generator supports tail call elimination for this target

**Table C.3:** Constants indicating target characteristics

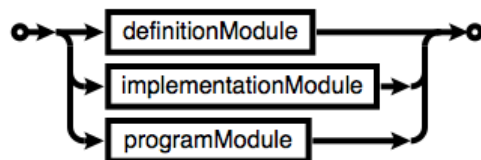
## Appendix D

# Syntax Diagrams

### Non-Terminals


#### Start Symbol

compilationUnit




#### Definition Module Syntax

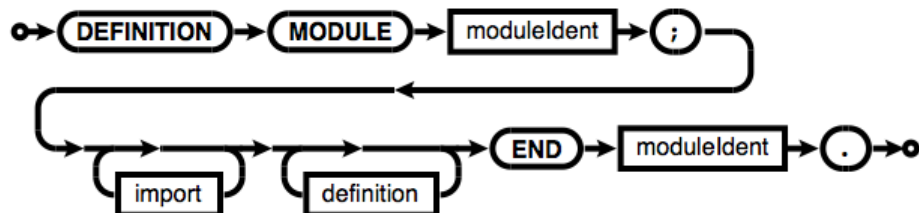
definitionModule




moduleIdent



import

























libIdent








reExport

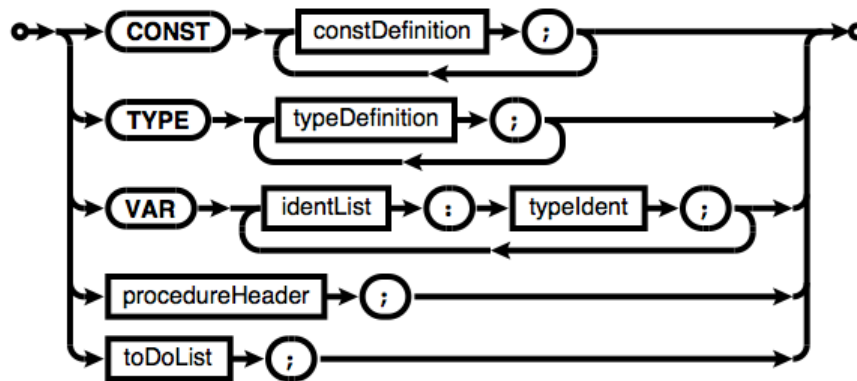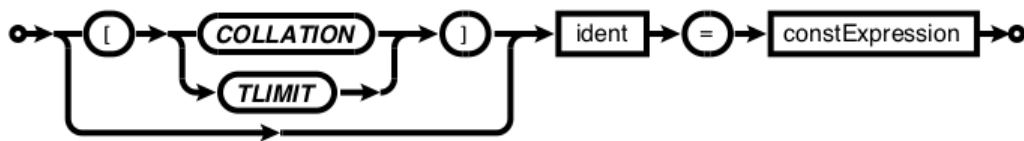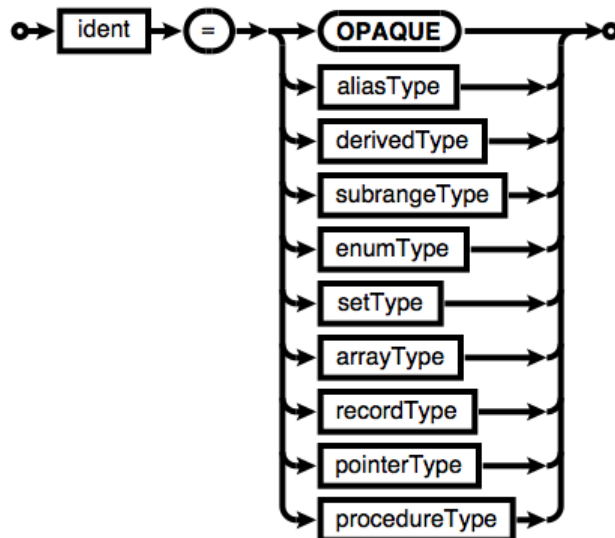











**definition****constDefinition****ident****constExpression****typeDefinition****aliasType****typIdent****qualident****derivedType**





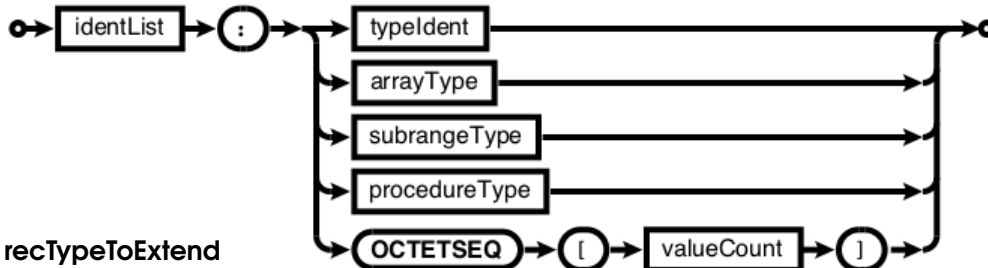


**subrangeType****range****lowerBound****countableType****enumType****identList****enumTypeToExtend****enumTypident****setType****arrayType****valueCount****recordType****fieldList****recTypeToExtend****pointerType**

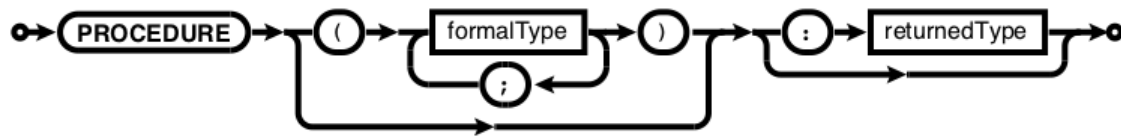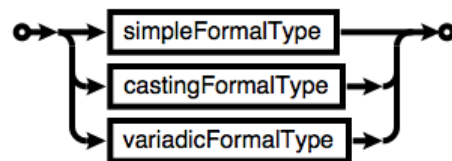**procedureType****formalType****nonAttrFormalType****returnedType****simpleFormalType****castingFormalType**






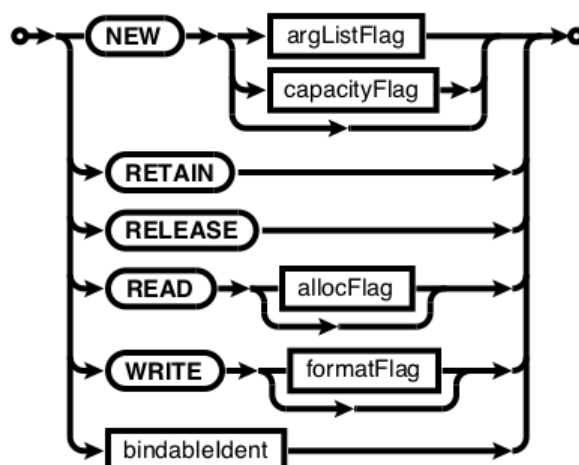
△ Syntax enabled by import of module `UNSAFE`














**variadicFormalType****procedureHeader****bindingSpecifier****argListFlag****capacityFlag****allocFlag****formatFlag**



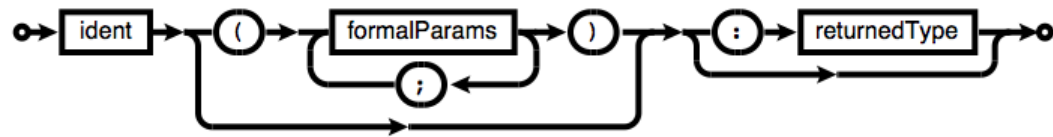
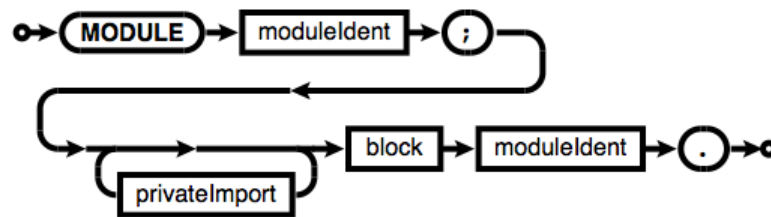


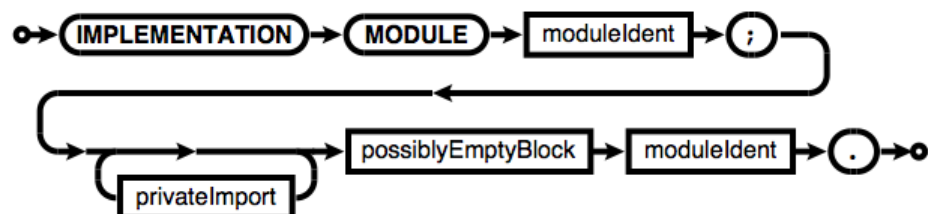

**bindableIdent****procedureSignature****formalParams****Implementation and Program Module Syntax****programModule****privateImport****block****implementationModule****possiblyEmptyBlock**





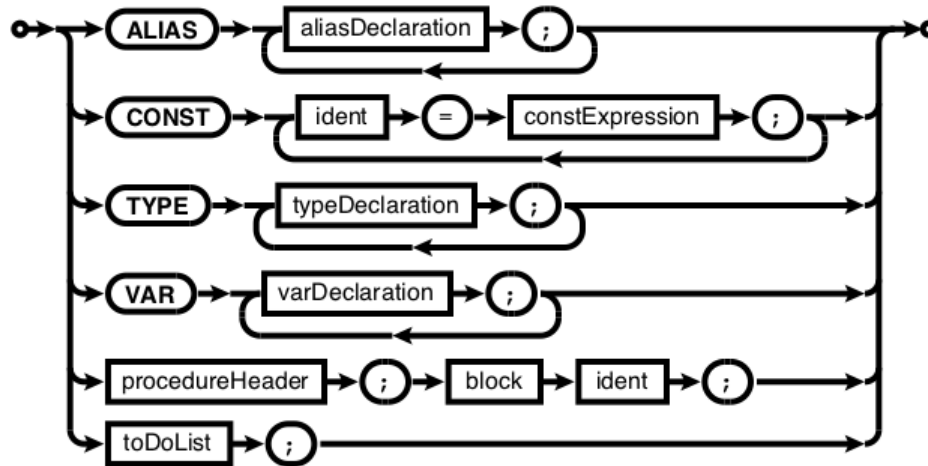
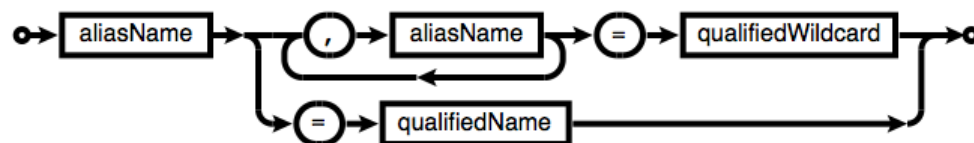




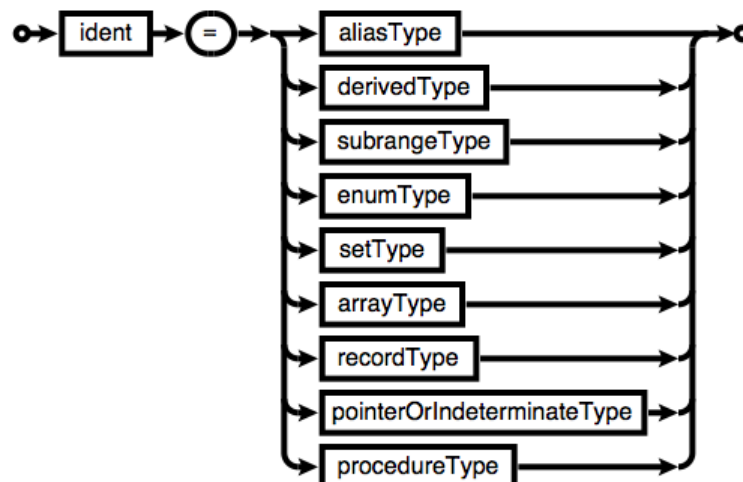
**declaration****aliasDeclaration****namedAliasDecl****aliasName****qualifiedName****wildcardAliasDecl****qualifiedWildcard****typeDeclaration**

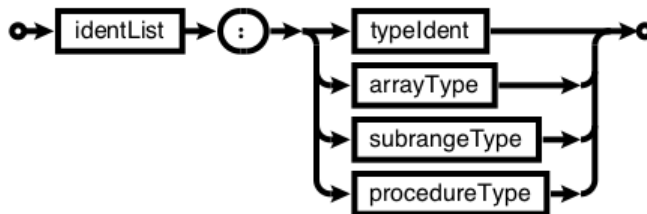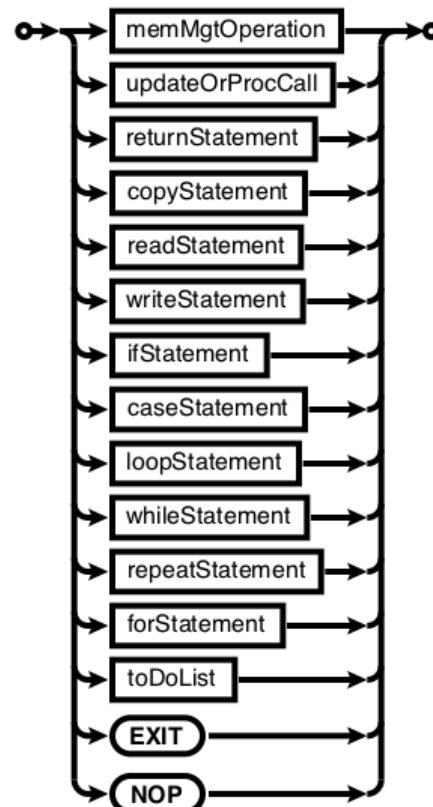

**pointerOrIndeterminateType****indeterminateTarget****indeterminateField****capacityField****varDeclaration****Statements****statementSequence****memMgtOperation****statement**

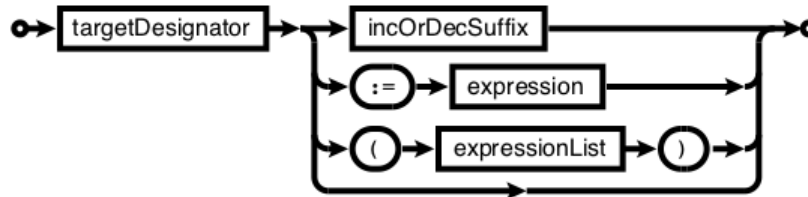
**newStatement****retainStatement****releaseStatement****updateOrProcCall****incOrDecSuffix****returnStatement****copyStatement****readStatement****writeStatement****inputArg****outputArgs****formattedArgs****unformattedArg****fmtStr****chan**

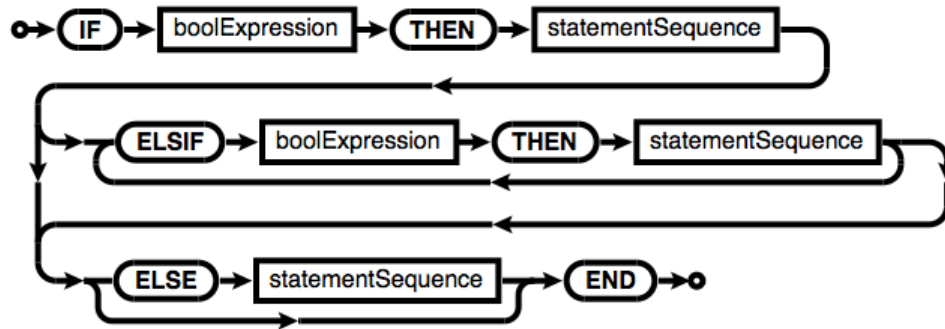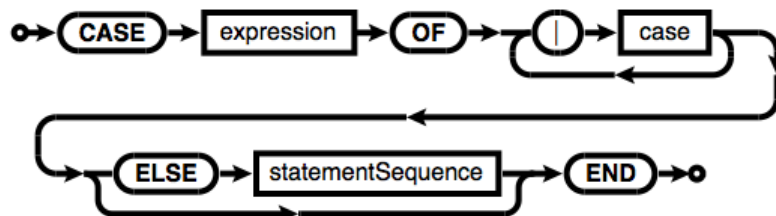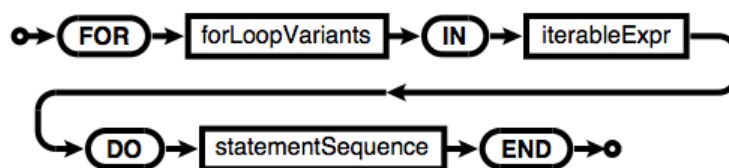**ifStatement****boolExpression****caseStatement****case****caseLabels****loopStatement****whileStatement****repeatStatement****forStatement**

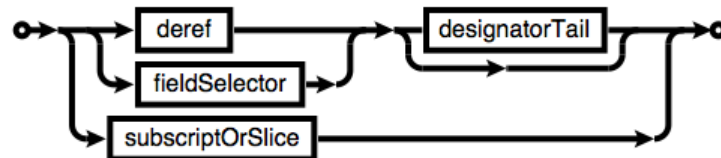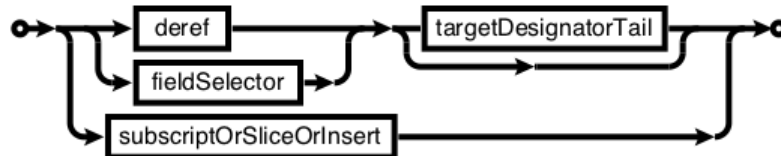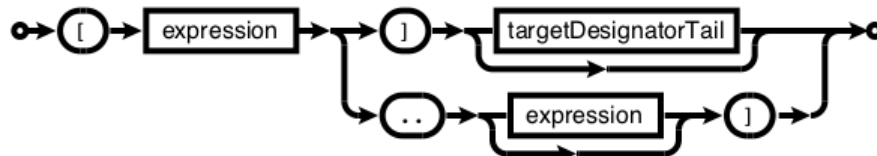
**forLoopVariables****iterableExpr****ordinalRange****designator****designatorTail****subscriptOrSlice****targetDesignator****targetDesignatorTail****subscriptOrSliceOrInsert****fieldSelector****deref****accessor****descender****firstValue****ordinalType**

## Expressions


**expressionList**




**expression**




**operL1**

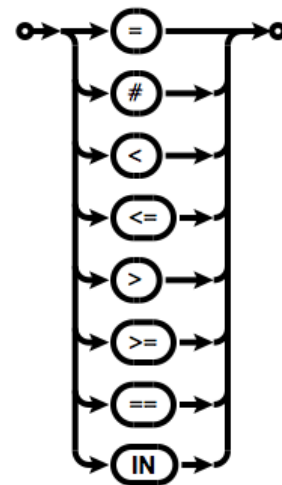

**simpleExpression**

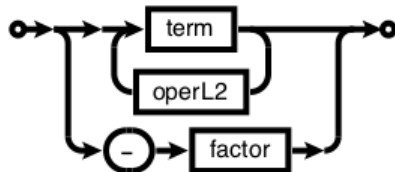

**operL2**




**concatOp**




**setDiffOp**



**term**




**operL3**



**simpleTerm**














**factor**



**typeConvOp**

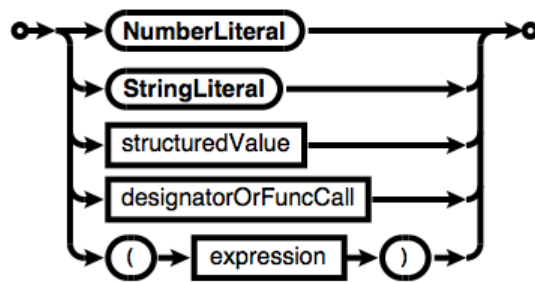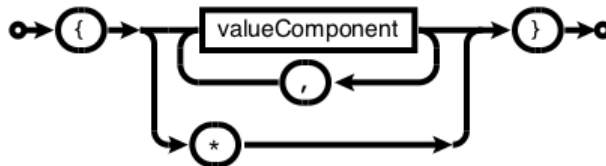


**simpleFactor****runtimeExpression****designatorOrFuncCall****structuredValue****valueComponent****Technical Debt Management****toDoList****trackingRef****taskToDo****issuelId, severity, estimatedTime****timeUnit****description****wholeNumber**


△ By convention `timeUnit` identifiers should be `w` for weeks, `d` for days, and `h` for hours

## Terminals

StdIdent



LetterOrDigit




Pervasive




Primitive



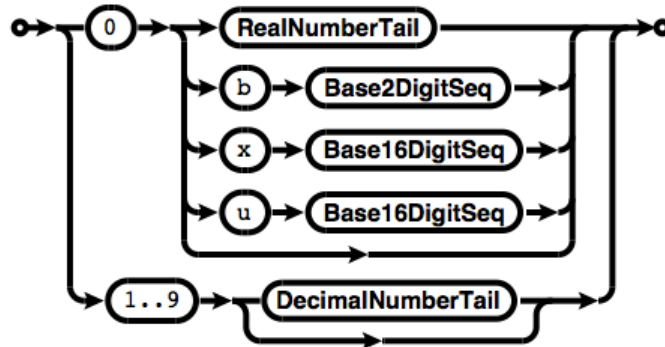
NumberLiteral




DecimalNumberTail




RealNumberTail

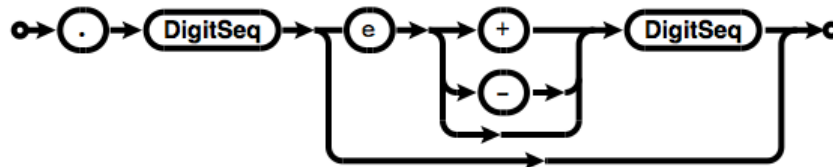

DigitSeq




DigitGroup




Base2DigitSeq




Base2DigitGroup











Base16DigitSeq




Base16DigitGroup



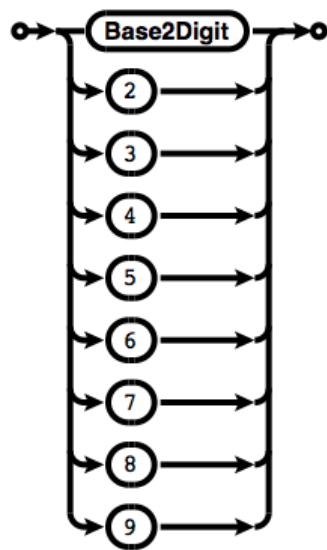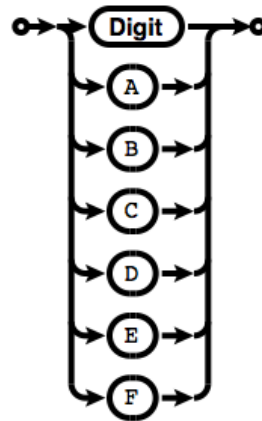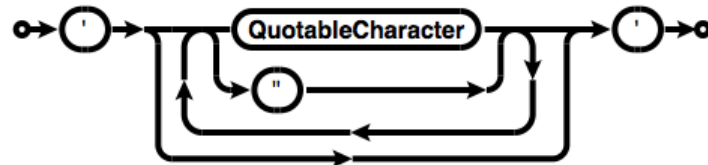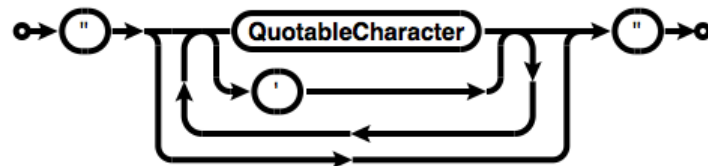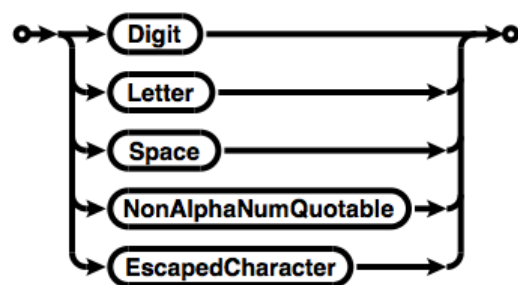
**Digit****Base2Digit****Base16Digit****StringLiteral****SingleQuotedString****DoubleQuotedString****QuotableCharacter****Letter**



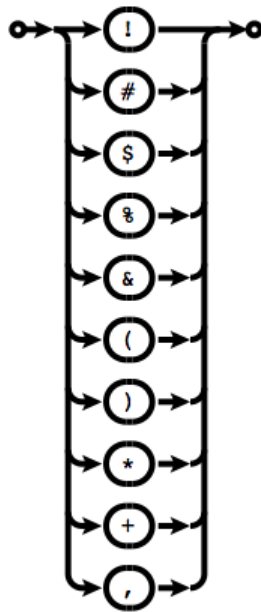
NonAlphaNumQuotable




NonAlphaNumQuotable2

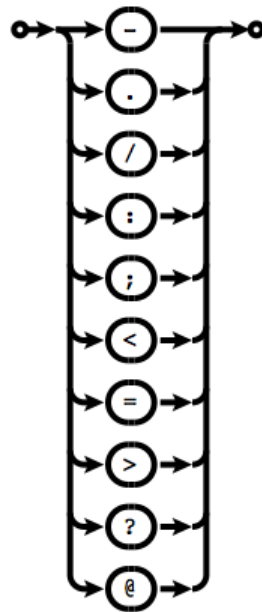

NonAlphaNumQuotable3

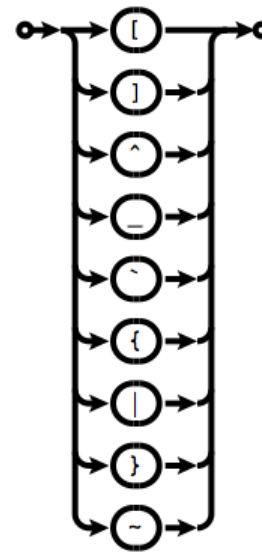

EscapedCharacter




## Ignore Symbols


Whitespace




LineComment








BlockComment

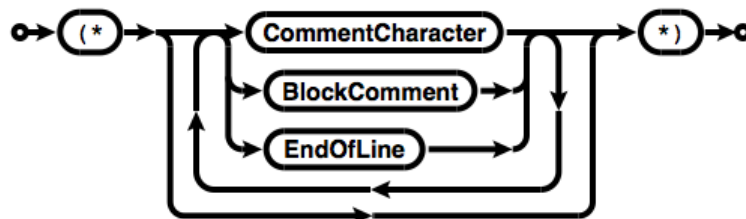

EndOfLine



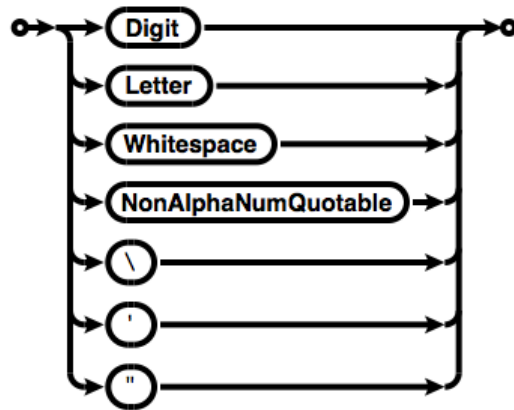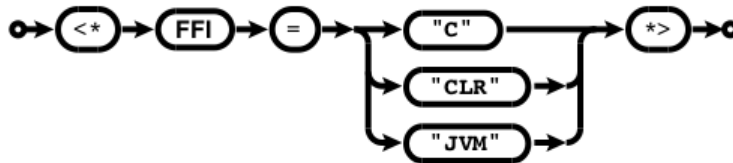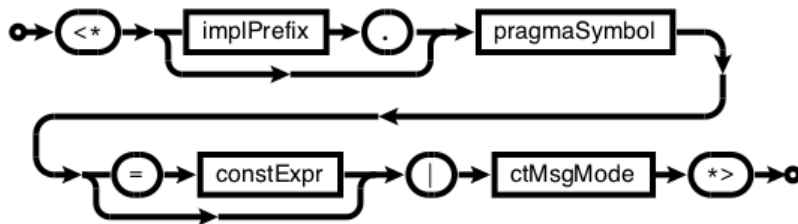**CommentCharacter****Pragmas****inlinePragma****deprecatedPragma****privatetoPragma****ffiPragma****ffidentPragma****implDefPragma****ctMsgMode****implPrefix****pragmaSymbol**

△ Implementation defined `implPrefix` and `pragmaSymbol` symbols follow the syntax of `StdIdent`

# Appendix E

## Naming Convention

### Module Identifiers

Module identifiers always start with a capital letter.

```
DEFINITION MODULE Foobar;
```

Multi-word module identifiers are in title case.

```
DEFINITION MODULE FileSystem;
```

A module identifier that coincides with a widely used acronym may be all-uppercase. However, as a general rule, the institution of all-uppercase identifiers should be avoided to prevent name conflicts with future reserved words and pervasive identifiers.

```
DEFINITION MODULE ASCII;
```

The identifier of a module that follows the module-as-a-type paradigm should be a singular noun, describing the type that the module provides.

```
DEFINITION MODULE String;  
TYPE String = OPAQUE;
```

The identifier of a module that follows the module-as-a-manager paradigm should be a singular noun, describing the management service the module provides.

```
DEFINITION MODULE Console;
```

However, in some cases it may be preferable for a module that follows the module-as-a-manager paradigm to use an identifier that is a plural noun, if that better describes its service.

```
DEFINITION MODULE CompilerOptions;
```

The use of single-letter module identifiers is **strictly prohibited** except in unit tests.

### Constant Identifiers

Constant identifiers always start with a capital letter.

```
CONST Separator = '/';
```

Multi-word constant identifiers are in title case.

```
CONST BufferSize = 4096;
```

A constant identifier that coincides with a widely used acronym may be all-uppercase. However, as a general rule, the institution of all-uppercase identifiers should be avoided.

```
DEFINITION MODULE NUL = 0u0; (* ASCII NUL *)
```

The enumerated values of enumeration types are constants and follow the naming convention for constants.

```
TYPE Status = ( Success, Failure );
```

The use of single-letter constant identifiers is **strictly prohibited** except in unit tests.

## Type Identifiers

Type identifiers always start with a capital letter.

```
TYPE Key = CARDINAL;
```

Multi-word type identifiers are in title case.

```
TYPE RegexStatus = RECORD ( Status ) code : RegexStatusCode END;
```

A type identifier that coincides with a widely used acronym may be all-uppercase. However, as a general rule, the institution of all-uppercase identifiers should be avoided.

```
TYPE AST = OPAQUE; (* Abstract Syntax Tree *)
```

The identifier of the primary type provided by a module that follows the module-as-a-type paradigm should match the module identifier verbatim.

```
DEFINITION MODULE String;  
TYPE String = OPAQUE;
```

The use of single-letter identifiers for public types is **strictly prohibited** except in unit tests.

## Variable Identifiers

Variable identifiers always start with a lowercase letter.

```
VAR ch : CHAR;
```

Multi-word variable identifiers are in camel case.

```
VAR sourceIndex, targetIndex : LONGCARD;
```

The use of single-letter variable identifiers should be avoided, except for modelling math formulas.

## Record Field Identifiers

Record field identifiers follow the convention for variable identifiers.

## Procedure Identifiers

Regular procedure identifiers always start with a capital letter.

```
PROCEDURE Write ( ch : CHAR );
```

Multi-word regular procedure identifiers are in title case.

```
PROCEDURE WriteString ( str : ARRAY OF CHAR );
```

The use of single-letter regular procedure identifiers is **strictly prohibited** except in unit tests.

## Function Identifiers

Function procedure identifiers always start with a lowercase letter.

```
PROCEDURE length ( str : String ) : LONGCARD;
```

Multi-word function procedure identifiers are in camel case.

```
PROCEDURE isQuotable ( ch : CHAR ) : BOOLEAN;
```

The use of single-letter function procedure identifiers is **strictly prohibited** except in unit tests.

## Formal Parameter Identifiers

Formal parameter identifiers follow the convention for variable identifiers.

The use of single-letter formal parameter identifiers should generally be avoided, but is permissible in math functions where parameters `n` and `m` denote unsigned integers, `i` and `j` denote signed integers and `r` denotes a real number.

```
PROCEDURE log2 ( n : CARDINAL ) : CARDINAL;
```

# Appendix F

## Library Interfaces

### Standard Library

#### Status

```
DEFINITION MODULE Status;
(** Status Root Type *)
TYPE Status = RECORD ( NIL )
    failed : BOOLEAN
END; (*Status*)
END Status.
```

#### StatusCode

```
DEFINITION MODULE StatusCode;
(** Status-Code Base Type *)
TYPE StatusCode =
    ( Success,
      Failure );
END StatusCode.
```

### Characters

#### ISO646

```
DEFINITION MODULE ISO646;
CONST (* Control Codes *)
    NUL=0u0; SOH=0u1; STX=0u2; ETX=0u3; EOT=0u4; ENQ=0u5; ACK=0u6; BEL=0u7; BS=0u8; TAB=0u9; LF=0u0A;
    VT=0u0B; FF=0u0C; CR=0u0D; SO=0u0E; SI=0u0F; DLE=0u10; DC1=0u11; DC2=0u12; DC3=0u13; DC4=0u14; NAK=0u15;
    SYN=0u16; ETB=0u17; CAN=0u18; EN=0u19; SUB=0u1A; ESC=0u1B; FS=0u1C; GS=0u1D; RS=0u1E; US=0u1F; DEL=0u7F;
CONST (* Printables *)
    SP=0u20; Exclamation=0u21; DoubleQuote=0u22; Octothorpe=0u23; Dollar=0u24; Percent=0u25; Ampersand=0u26;
    SingleQuote=0u27; LeftParenthesis=0u28; RightParenthesis=0u29; Asterisk=0u2A; Plus=0u2B; Comma=0u2C;
    Minus=0u2D; Period=0u2E; Solidus=0u2F; Colon=0u3A; Semicolon=0u3B; Less=0u3C; Equals=0u3D; Greater=0u3E;
    QuestionMark=0u3F; AtSign=0u40; LeftBracket=0u5B; Backslash=0u5C; RightBracket=0u5D; Caret=0u5E;
    Lowline=0u5F; Backquote=0u60; LeftBrace=0u7B; VerticalBar=0u7C; RightBrace=0u7D; Tilde=0u7E;
CONST (* Common Synonyms *)
    Whitespace=SP; Apostrophe=SingleQuote; LeftParen=LeftParenthesis; RightParen=RightParenthesis;
    HyphenMinus=Minus; Dot=Period; Slash=Solidus; LeftAngularBracket=Less; RightAngularBracket=Greater;
END ISO646.
```

### Char, Unichar

```
DEFINITION MODULE <#TitlecasedCharTypeIdent>;
PROCEDURE isDigit ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any digit *)
PROCEDURE isLetter ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any letter *)
PROCEDURE isLower ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any lowercase letter *)
PROCEDURE isUpper ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any uppercase letter *)
PROCEDURE isControl ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* 0u0..0u2F or 0u7F *)
PROCEDURE isAlphaNum ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any digit or letter *)
PROCEDURE isPrintable ( ch : <#CharTypeIdent#> ) : BOOLEAN; (* any non-alpha-numeric printable *)
PROCEDURE toLower ( ch : <#CharTypeIdent#> ) : <#CharTypeIdent#>;
    (* returns argument transformed to lowercase *)
PROCEDURE toUpper ( ch : <#CharTypeIdent#> ) : <#CharTypeIdent#>;
    (* returns argument transformed to uppercase *)
END <#TitlecasedCharTypeIdent#>.
```

Replace <#TitlecasedCharTypeIdent#> with Char / Unichar, and <#CharTypeIdent#> with CHAR / UNICHAR.

## Collation Order

Collation libraries bind custom collation tables to the language processor's internal table used by function `COLLATION()`.

Library collation tables contain the collation indices for characters in range `[0u20..0u7E]`. Control characters are excluded.

```

DEFINITION MODULE AsciiCollation;
(** ASCII Collation Order *)
CONST [COLLATION] Order = { 0..94 }; (* 95 values *)
END AsciiCollation.

```

```

DEFINITION MODULE EbcdicCollation;
(** EBCDIC Collation Order *)
CONST [COLLATION] Order = { 0, 6, 25, 21, 7, 15, 5, 23, 3, 9, 8, 4, 14, 11, 1, 12, 85, 86, 87, 88, 89, 90,
  91, 92, 93, 94, 20, 10, 2, 24, 17, 18, 22, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71,
  72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 54, 84, 55, 53, 16, 19, 26, 27, 28, 29, 30, 31, 32, 33, 34,
  35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 56, 13, 83, 52 }; (* 95 values *)
END EbcdicCollation.

```

## Dynamic Strings

### String, UniString

Template for dynamic string libraries `String` and `UniString`.

```

DEFINITION MODULE <#StringTypeIdent#>;
TYPE <#StringTypeIdent#> = OPAQUE;
CONST [TLIMIT] = CapacityLimit 0;
PROCEDURE [NEW] New ( VAR s : <#StringTypeIdent#> );
PROCEDURE [NEW+] NewWithStr ( VAR s : <#StringTypeIdent#>; CONST initStr : ARRAY OF <#CharTypeIdent#> );
PROCEDURE [NEW#] NewWithCapacity ( VAR s : <#StringTypeIdent#>; capacity : LONGCARD );
PROCEDURE [RETAIN] Retain ( VAR s : <#StringTypeIdent#> );
PROCEDURE [RELEASE] Release ( VAR s : <#StringTypeIdent#> );
PROCEDURE [_ATVALUE] charAtIndex ( CONST s : <#StringTypeIdent#>; atIndex : LONGCARD ) : <#CharTypeIdent#>;
PROCEDURE [_ATSTORE] storeAtIndex ( VAR s : <#StringTypeIdent#>; atIndex : LONGCARD; ch : <#CharTypeIdent#> );
PROCEDURE [LENGTH] length ( CONST s : <#StringTypeIdent#> ) : LONGCARD;
PROCEDURE [APPEND] AppendChars ( VAR s : <#StringTypeIdent#>; CONST chars : ARRAY OF <#CharTypeIdent#> );
PROCEDURE [_ATINSERT] InsertChars
  ( VAR s : <#StringTypeIdent#>; atIndex : LONGCARD; CONST chars : ARRAY OF <#CharTypeIdent#> );
PROCEDURE [_ATREMOVE] RemoveChars ( VAR s : <#StringTypeIdent#>; startIndex, endIndex : LONGCARD );
END <#StringTypeIdent#>.

```

Replace `<#StringTypeIdent#>` with `String` or `UniString`, and `<#CharTypeIdent#>` with `CHAR` or `UNICHAR` respectively.

## Key-Value Storage

Template for arbitrary dynamic key-value storage libraries.

```

DEFINITION MODULE <#TypeIdent#>;
TYPE <#TypeIdent#> = OPAQUE;
CONST [TLIMIT] = CapacityLimit 0;
PROCEDURE [NEW] New ( VAR dict : <#TypeIdent#> );
PROCEDURE [RETAIN] Retain ( VAR dict : <#TypeIdent#> );
PROCEDURE [RELEASE] Release ( VAR dict : <#TypeIdent#> );
PROCEDURE [_KVALUE] valueForKey ( CONST dict : <#TypeIdent#>; key : <#KeyTypeIdent#> ) : <#ValueTypeIdent#>;
PROCEDURE [_KVSTORE] StoreKV ( VAR dict : <#TypeIdent#>; key : <#KeyTypeIdent#>; value : <#ValueTypeIdent#> );
PROCEDURE [REMOVE] RemoveKeys ( VAR dict : <#TypeIdent#>; keys : ARGLIST OF <#KeyTypeIdent#> );
PROCEDURE [COUNT] count ( CONST dict : <#TypeIdent#> ) : LONGCARD;
(* Use of COPY and FOR statements are supported by bindings to FIRST, LAST, PREV and NEXT *)
PROCEDURE [FIRST] firstKey ( CONST dict : <#TypeIdent#> ) : <#KeyTypeIdent#>;
PROCEDURE [LAST] lastKey ( CONST dict : <#TypeIdent#> ) : <#KeyTypeIdent#>;
PROCEDURE [PREV] nextKey ( CONST dict : <#TypeIdent#>; key : <#KeyTypeIdent#> ) : <#KeyTypeIdent#>;
PROCEDURE [NEXT] prevKey ( CONST dict : <#TypeIdent#>; key : <#KeyTypeIdent#> ) : <#KeyTypeIdent#>;
END <#TypeIdent#>.

```

Replace `<#TypeIdent#>` with desired name, `<#KeyTypeIdent#>` with key type and `<#ValueTypeIdent#>` with value type.

## Math

### CardinalMath, LongCardMath

Template\* for `CARDINAL` and `LONGCARD` math libraries `CardinalMath` and `LongCardMath`.

```
DEFINITION MODULE <#TitlecasedTypeIdent#>Math;
PROCEDURE power ( n, exponent : <#TypeIdent#> ) : <#TypeIdent#>; (* n to the power of exponent *)
PROCEDURE digitCount ( n : <#TypeIdent#> ) : CARDINAL; (* number of digits of n in decimal notation *)
END <#TitlecasedTypeIdent#>Math.
```

### IntegerMath, LongIntMath

Template\* for `INTEGER` and `LONGINT` math libraries `IntegerMath` and `LongIntMath`.

```
DEFINITION MODULE <#TitlecasedTypeIdent#>Math;
PROCEDURE fdiv ( a, n : <#TypeIdent#> ) : <#TypeIdent#>; (* floored integer division *)
PROCEDURE fmod ( a, n : <#TypeIdent#> ) : <#TypeIdent#>; (* modulus of floored integer division *)
PROCEDURE tdiv ( a, n : <#TypeIdent#> ) : <#TypeIdent#>; (* truncated integer division *)
PROCEDURE tmod ( a, n : <#TypeIdent#> ) : <#TypeIdent#>; (* modulus of truncated integer division *)
PROCEDURE power ( i, exponent : <#TypeIdent#> ) : <#TypeIdent#>; (* i to the power of exponent *)
PROCEDURE digitCount ( i : <#TypeIdent#> ) : CARDINAL; (* number of digits of i in decimal notation *)
END <#TitlecasedTypeIdent#>Math.
```

### RealMath, LongRealMath

Template\* for `REAL` and `LONGREAL` math libraries `RealMath` and `LongRealMath`.

```
DEFINITION MODULE <#TitlecasedTypeIdent#>Math;
CONST
  e = 2.7182818284590452353602874713526;
  pi = 3.1415926535897932384626433832795;
  phi = 1.6180339887498948482045868343656;
  tau = 6.2831853071795864769252867665590;
PROCEDURE frac ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* fractional part of r *)
PROCEDURE ceil ( r : <#TypeIdent#> ) : <#TypeIdent#>; (*  $\lceil r \rceil$  *)
PROCEDURE floor ( r : <#TypeIdent#> ) : <#TypeIdent#>; (*  $\lfloor r \rfloor$  *)
PROCEDURE trunc ( r : <#TypeIdent#>; n : CARDINAL ) : <#TypeIdent#>; (* truncation of r to n places *)
PROCEDURE round ( r : <#TypeIdent#>; n : CARDINAL ) : <#TypeIdent#>; (* rounding of r to n places *)
PROCEDURE inv ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* multiplicative inverse of r *)
PROCEDURE power ( r, exponent : <#TypeIdent#> ) : <#TypeIdent#>; (* r to the power of exponent *)
PROCEDURE sqrt ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* square root of r *)
PROCEDURE ln ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* natural logarithm of r *)
PROCEDURE log ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* base-10 logarithm of r *)
PROCEDURE sin ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* sine of r *)
PROCEDURE cos ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* cosine of r *)
PROCEDURE tan ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* tangent of r *)
PROCEDURE arcsin ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* arcsine of r *)
PROCEDURE arccos ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* arccosine of r *)
PROCEDURE arctan ( r : <#TypeIdent#> ) : <#TypeIdent#>; (* arctangent of r *)
END <#TitlecasedTypeIdent#>Math.
```

## Memory Allocation

The storage library binds allocation and deallocation procedures to primitives `_ALLOC` and `_DEALLOC`.

```
DEFINITION MODULE Storage;
(* Allocates memory block of <size> octets and passes its address back in p. *)
PROCEDURE [_ALLOC] Allocate ( VAR p : CAST ADDRESS; size : LONGCARD );
(* Deallocates memory block pointed to by p and passes NIL back in p. *)
PROCEDURE [_DEALLOC] Deallocate ( VAR p : CAST ADDRESS );
END Storage.
```

\*Replace `<#TypeIdent#>` with type identifier and `<#TitlecasedTypeIdent#>` with titlecase transformed type identifier.

## Regular Expressions

### Grammar

```

/** non-terminals */
regex := term+ ( '|' term+ ) * ;
term := factor ( '*' /* 0..n */ | '+' /* 1..n */ | '?' /* 0..1 */ | arbitraryQuantifier )? ;
arbitraryQuantifier := '{' Digit+ ( ',' Digit+ )? '}' /* exact occurrences or min..max occurrences */
factor := ( '~' /* inverse match */ | '{a}' /* case insensitive match */ )? simpleFactor ;
simpleFactor := literal | Synonym | '[' range ( ',' range ) * ']' | '(' regex ')' ;
literal := Digit | Letter | RePrintable | CodePointOrRange ;
range := ( Digit '-' Digit ) | ( LowerLetter '-' LowerLetter ) | ( UpperLetter '-' UpperLetter ) ;
/** non-terminals */
Synonym := '{start}' | '{end}' | '{nul}' | '{sp}' | '{tab}' | '{ws}' | '{nl}' | '{ret}' | '{bar}' | '{tilde}' | '{qm}' |
  '{plus}' | '{ast}' | '{lparen}' | '{rparen}' | '{lbrack}' | '{rbrack}' | '{lbrace}' | '{rbrace}' | '{q}' | '{qq}' |
  '{sign}' | '{binary}' | '{lowerbool}' | '{upperbool}' | '{bool}' | '{digit}' | '{lowerhex}' | '{upperhex}' |
  '{hex}' | '{lower}' | '{upper}' | '{alpha}' | '{alnum}' | '{control}' | '{printable}' | '{nonalnum}' | '{int}' |
  '{real}' | '{escseq}' | '{word}' | '{allcaps}' | '{ident}' | '{camelident}' | '{titleident}' | '{allcapsident}' ;
RePrintable := ASCII(0x22..0x27) | ',' | ASCII(0x2E..0x3E) | ASCII(0x40..0x5A) | '\' | ASCII(0x5E..0x7A) ;
CodePointOrRange := '#' ( Digit | 'A' .. 'F' )+ ( '-' ( Digit | 'A' .. 'F' )+ )? '}' ;
Digit := '0' .. '9' ; LowerLetter := 'a' .. 'z' ; UpperLetter := 'A' .. 'Z' ; Letter := 'a' .. 'z' | 'A' .. 'Z' ;
/** verbatim whitespace and control characters are ignored */

```

### Regex

```

DEFINITION MODULE Regex;
IMPORT CharRE+, UnicharRE+;
END Regex.

```

### CharRE, UnicharRE

```

DEFINITION MODULE <#TitlecasedCharTypeIdent#>RE;
PROCEDURE matches ( CONST str, re : ARRAY OF <#CharTypeIdent#> ) : BOOLEAN;
END <#TitlecasedCharTypeIdent#>RE.

```

Replace <#CharTypeIdent#> with CHAR / UNICHAR and <#TitlecasedCharTypeIdent#> with Char / Unichar.

### StringRE, UniStringRE

```

DEFINITION MODULE <#StringTypeIdent#>RE;
IMPORT <#StringTypeIdent#>;
PROCEDURE matches ( CONST str : String; CONST re : ARRAY OF <#CharTypeIdent#> ) : BOOLEAN;
END <#StringTypeIdent#>RE.

```

Replace <#CharTypeIdent#> with CHAR / UNICHAR and <#StringTypeIdent#> with String / UniString.

### CharRegexNFA, UnicharRegexNFA

```

DEFINITION MODULE <#TitlecasedCharTypeIdent#>RegexNFA;
IMPORT RegexStatus, RegexStatusCode, RegexNotification;
TYPE <#TitlecasedCharTypeIdent#>RegexNFA : OPAQUE;
  NotificationHandler = PROCEDURE ( VAR (*notifiedEvent:*) RegexNotification;
    VAR (*char:*) <#CharTypeIdent#>; VAR (*index:*) LONGCARD; VAR (*stateCount:*) CARDINAL );
PROCEDURE [NEW] New ( VAR nfa : <#TitlecasedCharTypeIdent#>RegexNFA );
PROCEDURE [RETAIN] Retain ( nfa : <#TitlecasedCharTypeIdent#>RegexNFA );
PROCEDURE [RELEASE] Release ( VAR nfa : <#TitlecasedCharTypeIdent#>RegexNFA );
PROCEDURE installHandler ( nfa : <#TitlecasedCharTypeIdent#>RegexNFA; handler : NotificationHandler );
PROCEDURE matches
  ( nfa : <#TitlecasedCharTypeIdent#>RegexNFA; CONST str : ARRAY OF <#CharTypeIdent#> ) : BOOLEAN;
PROCEDURE status ( nfa : <#TitlecasedCharTypeIdent#>RegexNFA ) : RegexStatus;
END <#TitlecasedCharTypeIdent#>RegexNFA.

```

Replace <#CharTypeIdent#> with CHAR / UNICHAR and <#TitlecasedCharTypeIdent#> with Char / Unichar.

### RegexNotification

```

DEFINITION MODULE RegexNotification;
TYPE RegexNotification = ( SizeInfo, NoMatchInfo, IllegalChar, UnknownSynonym, AllocFailed );
END RegexNotification.

```

### RegexStatus

```

DEFINITION MODULE RegexStatus;
IMPORT Status;
TYPE RegexStatus =
  RECORD ( Status ) code : RegexStatusCode END;
END RegexStatus.

```

### RegexStatusCode

```

DEFINITION MODULE RegexStatusCode;
IMPORT StatusCode;
TYPE RegexStatusCode = ( +StatusCode, InvalidExpr,
  InvalidStr, InvalidNFA, StackFull, AllocFailed );
END RegexStatusCode.

```



## Hashing

### Hash32, UniHash32

```

DEFINITION MODULE <#LibIdent#>;
CONST MaxBits = 32;
TYPE Key = RECORD data : OCTETSEQ [MaxBits DIV 8] END;
(* functions for incremental hashing *)
PROCEDURE initialValue : Key;
PROCEDURE valueForNextChar ( hash : Key; ch : <#CharTypeIdent#> ) : Key;
PROCEDURE finalValue ( hash : Key ) : Key;
(* functions for en-bloc string hashing *)
PROCEDURE valueForArray ( CONST str : ARRAY OF <#CharTypeIdent#> ) : Key;
PROCEDURE valueForSlice ( CONST str : ARRAY OF <#CharTypeIdent#>; startIndex, endIndex : LONGCARD ) : Key;
END <#LibIdent#>.

```

Replace <#LibIdent#> with Hash32 / UniHash32 and <#CharTypeIdent#> with CHAR / UNICHAR .

### Hash64, UniHash64

```

DEFINITION MODULE <#LibIdent#>;
CONST MaxBits = 64;
TYPE Key = RECORD data : OCTETSEQ [MaxBits DIV 8] END;
(* functions for incremental hashing *)
PROCEDURE initialValue : Key;
PROCEDURE valueForNextChar ( hash : Key; ch : <#CharTypeIdent#> ) : Key;
PROCEDURE finalValue ( hash : Key ) : Key;
(* functions for en-bloc string hashing *)
PROCEDURE valueForArray ( CONST str : ARRAY OF <#CharTypeIdent#> ) : Key;
PROCEDURE valueForSlice ( CONST str : ARRAY OF <#CharTypeIdent#>; startIndex, endIndex : LONGCARD ) : Key;
END <#LibIdent#>.

```

Replace <#LibIdent#> with Hash64 / UniHash64 and <#CharTypeIdent#> with CHAR / UNICHAR .

## Filesystem

### Filesys

```

DEFINITION MODULE Filesys;
IMPORT DateTime, IOSize, FilesysStatus, FilesysStatusCode;
TYPE Status = ALIAS OF FilesysStatus; TYPE StatusCode = ALIAS OF FilesysStatusCode;
TYPE Attribute = ( Readable, Writable, Executable, Directory, Other );
TYPE AttrSet = SET OF Attribute;
CONST RO = { Attribute.Readable }; WO = { Attribute.Writable }; EO = { Attribute.Executable };
RW = { Attribute.Readable, Attribute.Writable }; RWE = RW + { Attribute.Executable };
PROCEDURE maxFilenameLength : LONGCARD;
PROCEDURE maxPathnameLength : LONGCARD;
PROCEDURE isFile ( CONST atPath : ARRAY OF CHAR; VAR status : Status ) : BOOLEAN;
PROCEDURE isDirectory ( CONST atPath : ARRAY OF CHAR; VAR status : Status ) : BOOLEAN;
PROCEDURE entryExists ( CONST atPath : ARRAY OF CHAR; VAR status : Status ) : BOOLEAN;
PROCEDURE attrSet ( CONST atPath : ARRAY OF CHAR; VAR status : Status ) : AttrSet;
PROCEDURE SetAttr ( CONST atPath : ARRAY OF CHAR; attr : AttrSet; VAR status : Status );
PROCEDURE GetFileSize ( CONST atPath : ARRAY OF CHAR; VAR size : IOSize; VAR status : Status );
PROCEDURE GetTimeCreated ( CONST atPath : ARRAY OF CHAR; VAR timestamp : DateTime; VAR status : Status );
PROCEDURE GetTimeModified ( CONST atPath : ARRAY OF CHAR; VAR timestamp : DateTime; VAR status : Status );
PROCEDURE CreateEntry ( CONST atPath : ARRAY OF CHAR; attr : AttrSet; VAR status : Status );
PROCEDURE RenameEntry ( CONST atPath, newFilename : ARRAY OF CHAR; VAR status : Status );
PROCEDURE MoveEntry ( CONST fromPath, toPath : ARRAY OF CHAR; VAR status : Status );
PROCEDURE RemoveEntry ( CONST atPath : ARRAY OF CHAR; VAR status : Status );
END Filesys.

```

### FilesysStatus

```

DEFINITION MODULE FilesysStatus;
IMPORT Status;
TYPE FilesysStatus =
  RECORD ( Status )
    code : FilesysStatusCode
  END;
END FilesysStatus.

```

### FilesysStatusCode

```

DEFINITION MODULE FilesysStatusCode;
IMPORT StatusCode;
TYPE FilesysStatusCode =
  ( +StatusCode, (* inherits Success and Failure *)
    AlreadyExists, InvalidPath, PathNotFound, PathTooLong, InvalidName,
    NameTooLong, InvalidAttr, AccessDenied, SizeOverflow, DeviceError );
END FilesysStatusCode.

```

## Runtime System Interface

### RTS

```

DEFINITION MODULE RTS;
TYPE Fault = ( DivByZero, DerefNil, NotRefCounted, InvalidAccessor, TypeOverflow,
  IndexOutOfBounds, CapacityExceeded, StackOverflow, OutOfMemory, LibAbort, UserAbort );
TYPE NotificationHandler = PROCEDURE ( VAR (*PC*) UNSAFE.ADDRESS; VAR (*SP*) UNSAFE.ADDRESS );
(* Callback procedure type for runtime fault notification handlers, passing back two addresses:
  PC = program counter at which the fault event occurred.
  SP = stack pointer at which the fault event occurred. *)
PROCEDURE RaiseFault ( fault : Fault );
(* Raises runtime fault and causes program abort, never returns. *)
PROCEDURE InstallNotificationHandler ( forFault : Fault; handler : NotificationHandler );
(* Installs the given notification handler for the specified runtime fault. *)
PROCEDURE InstallInitHasFinishedHandler ( handler : PROCEDURE );
(* Installs given procedure as the program's post-initialisation handler. *)
PROCEDURE InstallWillTerminateHandler ( handler : PROCEDURE );
(* Installs given procedure as the program's pre-termination handler. *)
END RTS.

```

## Host OS Interface

### System

```

DEFINITION MODULE System;
IMPORT Newline, DateTime;
CONST MaxOSNameLength = 65; (* POSIX.1—2001 *)
  MaxHostnameLength = 255; (* RFC 1123 *)
  CountryCodeLength = 2; (* ISO 3166—1 alpha-2 *)
  LanguageCodeLength = 2; (* ISO 639—1 *)
  CurrencyCodeLength = 3; (* ISO 4217 *)
PROCEDURE GetOSName ( VAR str : ARRAY OF CHAR );
PROCEDURE GetHostname ( VAR str : ARRAY OF CHAR );
PROCEDURE GetVersion ( VAR major, minor, subminor : CARDINAL );
PROCEDURE newlineMode : Newline.Mode; (* platform dependent default *)
PROCEDURE GetDateTime ( VAR timestamp : DateTime; VAR tzOffs : DateTime.TZOffset );
PROCEDURE GetSysLocale
  ( VAR tzOffset : DateTime.TZOffset; VAR decimalSep : CHAR;
    VAR countryCode, langCode, currencyCode : ARRAY OF CHAR );
END System.

```

### OSUserEnv

```

DEFINITION MODULE OSUserEnv;
IMPORT DateTime;
PROCEDURE GetCWD ( VAR dirStr : ARRAY OF CHAR ); (* get current working directory *)
PROCEDURE SetCWD ( CONST dirStr : ARRAY OF CHAR ); (* set current working directory *)
PROCEDURE GetUserLocale
  ( VAR tzOffset : DateTime.TZOffset; VAR decimalSep : CHAR;
    VAR countryCode, langCode, currencyCode : ARRAY OF CHAR );
PROCEDURE SetUserLocaleTZ ( tzOffs : DateTime.TZOffset; VAR succeeded : BOOLEAN );
PROCEDURE SetUserLocaleDecSep ( decimalSep : CHAR; VAR succeeded : BOOLEAN ); (* ",", " or "." *)
PROCEDURE SetUserLocaleCountry ( CONST countryCode : ARRAY OF CHAR; VAR succeeded : BOOLEAN );
PROCEDURE SetUserLocaleLanguage ( CONST langCode : ARRAY OF CHAR; VAR succeeded : BOOLEAN );
PROCEDURE SetUserLocaleCurrency ( CONST currencyCode : ARRAY OF CHAR; VAR succeeded : BOOLEAN );
END OSUserEnv.

```

## Date and Time

### DateTime

```

DEFINITION MODULE DateTime;
IMPORT INTEGER32;
CONST
  OneYear = { 1, 0, 0, 0, 0, 0, 0, 0, 0 };
  OneMonth = { 0, 1, 0, 0, 0, 0, 0, 0, 0 };
  OneDay = { 0, 0, 1, 0, 0, 0, 0, 0, 0 };
  OneHour = { 0, 0, 0, 1, 0, 0, 0, 0, 0 };
  OneMin = { 0, 0, 0, 0, 1, 0, 0, 0, 0 };
TYPE DateTime = RECORD
  year : Year;
  month : Month;
  day : Day;
  hour : Hour;
  min : Minute;
  sec : Second;
  msec : MilliSecond;
  tzOffs : TimeZoneOffset
END; (* DateTime *)

  Year = ALIAS OF INTEGER32;
  Month = [0..12] OF INTEGER32;
  Day = [0..31] OF INTEGER32;
  Hour = [0..23] OF INTEGER32;
  Minute = [0..59] OF INTEGER32;
  Second = [0..59] OF INTEGER32;
  MilliSecond = [0..999] OF INTEGER32;
  TimeZoneOffset = [-720..720] (*minutes*) OF INTEGER32;
  TZOffset = ALIAS OF TimeZoneOffset;

PROCEDURE isValidAbsoluteDate ( CONST time : DateTime ) : BOOLEAN; (* year, month, day > 0 *)
PROCEDURE isEarlier ( CONST t1, t2 : DateTime ) : BOOLEAN; (* t1 < t2 *)
PROCEDURE sum ( CONST t1, t2 : DateTime ) : DateTime; (* t1 + t2 *)
PROCEDURE diff ( CONST t1, t2 : DateTime ) : DateTime; (* t1 - t2 *)
PROCEDURE toDays ( CONST time : DateTime ) : INTEGER32; (* time → days *)
PROCEDURE scalarDelta ( CONST time : DateTime; deltaDays : INTEGER32 ) : DateTime; (* time +/- days *)
PROCEDURE scalarProduct ( CONST time : DateTime; factor : INTEGER32 ) : DateTime; (* time * factor *)
PROCEDURE scalarQuotient ( CONST time : DateTime; divisor : INTEGER32 ) : DateTime; (* time / divisor *)
END DateTime.

```

### DateTimeIO

```

DEFINITION MODULE DateTimeIO;
IMPORT DateTime, IOChannel;
PROCEDURE [WRITE] Write ( chan : IOChannel; value : DateTime );
PROCEDURE [WRITE#] Write ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; value : DateTime );
END DateTimeIO.

```

## Whole Number Types with Fixed Bitwidth

Implementations targeting multiple architectures may require target-specific versions of the library.

### CARDINAL32

```

DEFINITION MODULE CARDINAL32;
TYPE CARDINAL32 = ALIAS OF <#32BitCardinal#>;
END CARDINAL32.

```

### INTEGER32

```

DEFINITION MODULE INTEGER32;
TYPE INTEGER32 = ALIAS OF <#32BitInteger#>;
END INTEGER32.

```

For targets

- where `TSIZE(CARDINAL)=32`, replace `<#32BitCardinal#>` with `CARDINAL` and `<#32BitInteger#>` with `INTEGER`
- where `TSIZE(LONGCARD)=32`, replace `<#32BitCardinal#>` with `LONGCARD` and `<#32BitInteger#>` with `LONGINT`

# Appendix G

## IO Library Interfaces

### Group IO Aggregators

Group IO aggregators are modules that import and re-export the IO library modules for a given group of types. They represent the top user-level of the type specific IO library. The standard library defines two group IO aggregator modules:

#### PervasiveIO

IO aggregator `PervasiveIO` imports and re-exports the IO library modules for the pervasive types.

```
DEFINITION MODULE PervasiveIO;  
IMPORT BooleanIO+, CharIO+, UnicharIO+,  
    OctetIO+, CardinalIO+, LongCardIO+, IntegerIO+, LongIntIO+, RealIO+, LongRealIO+;  
END PervasiveIO.
```

#### MachineTypeIO

IO aggregator `MachineTypeIO` imports and re-exports the IO library modules for the *machine types*.

```
DEFINITION MODULE MachineTypeIO;  
IMPORT ByteIO+, WordIO+, LongWordIO+, AddressIO+;  
END MachineTypeIO.
```

### Type Specific IO Aggregators

The standard library defines 14 type specific IO aggregator modules, one for each pervasive type and one for each *machine type*. Each type specific IO aggregator imports and re-exports the IO modules for values and arrays of a given type.

The module identifier of a type specific IO aggregator for a given type `T` is composed from the titlecase transformed identifier of type `T`, followed by suffix `IO`. Type identifiers with prefix `LONG` are considered two words, others are considered one word. Thus, the titlecase transformation of `UNICHAR` is `Unichar`, but that of `LONGCARD` is `LongCard`.

The IO aggregator for a given type `T` may be generated from the template\* below by replacing

- all occurrences of `<#TypeID#>` with the identifier of type `T`, and
- all occurrences of `<#TitleCasedTypeID#>` with the titlecase transformation of the identifier of type `T`.

Common template for pervasive types and *machine types*

```
DEFINITION MODULE <#TitleCasedTypeID#>IO;  
IMPORT Sole<#TypeID#>IO+, Array<#TypeID#>IO+;  
END <#TitleCasedTypeID#>IO.
```

---

\*Template expansion may easily be automated using the Unix `awk` or `sed` utilities.

## Type Specific Value IO Modules

The standard library defines 14 type specific value IO modules, one for each pervasive type and one for each *machine type*. Each type specific value IO module provides IO bindings for reading and writing sole values of a given type.

The module identifier of a type specific value IO module for a given type `T` is composed from prefix `Sole`, followed by the titlecase transformed identifier of type `T`, followed by suffix `IO`.

The interface of a value IO module for a given type `T` may be generated from one of the two templates below by replacing

- all occurrences of `<#TypeIdent#>` with the identifier of type `T`, and
- all occurrences of `<#TitleCasedTypeIdent#>` with the titlecase transformation of the identifier of type `T`.

Template for pervasive types

```
DEFINITION MODULE Sole<#TitleCasedTypeIdent#>IO;
IMPORT IOChannel;
PROCEDURE [READ] Read ( chan : IOChannel; VAR value : <#TypeIdent#> );
PROCEDURE [WRITE] Write ( chan : IOChannel; value : <#TypeIdent#> );
PROCEDURE [WRITE#] WriteF ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; value : <#TypeIdent#> );
END Sole<#TitleCasedTypeIdent#>IO.
```

Template for machine types

```
DEFINITION MODULE Sole<#TitleCasedTypeIdent#>IO;
IMPORT UNSAFE, IOChannel;
PROCEDURE [READ] Read ( chan : IOChannel; VAR value : UNSAFE.<#TypeIdent#> );
PROCEDURE [WRITE] Write ( chan : IOChannel; value : UNSAFE.<#TypeIdent#> );
PROCEDURE [WRITE#] WriteF
  ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; value : UNSAFE.<#TypeIdent#> );
END Sole<#TitleCasedTypeIdent#>IO.
```

## Type Specific Array IO Modules

The standard library defines 14 type specific array IO modules, one for each pervasive type and one for each *machine type*. Each type specific array IO module provides IO bindings for reading and writing arrays of a given type.

The module identifier of a type specific array IO module for a given type `T` is composed from prefix `ArrayOf`, followed by the titlecase transformed identifier of type `T`, followed by suffix `IO`.

The interface of an array IO module for a given type `T` may be generated from one of the two templates below by replacing

- all occurrences of `<#TypeIdent#>` with the identifier of type `T`, and
- all occurrences of `<#TitleCasedTypeIdent#>` with the titlecase transformation of the identifier of type `T`.

Template for pervasive types

```
DEFINITION MODULE ArrayOf<#TitleCasedTypeIdent#>IO;
IMPORT IOChannel;
PROCEDURE [READ] Read ( chan : IOChannel; VAR array : ARRAY OF <#TypeIdent#> );
PROCEDURE [WRITE] Write ( chan : IOChannel; CONST array : ARRAY OF <#TypeIdent#> );
PROCEDURE [WRITE#] WriteF
  ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; CONST array : ARRAY OF <#TypeIdent#> );
END ArrayOf<#TitleCasedTypeIdent#>IO.
```

Template for *machine types*

```
DEFINITION MODULE ArrayOf<#TitleCasedTypeIdent#>IO;
IMPORT UNSAFE, IOChannel;
PROCEDURE [READ] Read ( chan : IOChannel; VAR array : ARRAY OF UNSAFE.<#TypeIdent#> );
PROCEDURE [WRITE] Write ( chan : IOChannel; CONST array : ARRAY OF UNSAFE.<#TypeIdent#> );
PROCEDURE [WRITE#] WriteF
  ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; CONST array : ARRAY OF UNSAFE.<#TypeIdent#> );
END ArrayOf<#TitleCasedTypeIdent#>IO.
```

## Channel Based IO

### StdIO

```

DEFINITION MODULE StdIO;
IMPORT IOChannel, IOStatus;
PROCEDURE [_STDIN] in : IOChannel <*INLINE*>;
PROCEDURE [_STDOUT] out : IOChannel <*INLINE*>;
PROCEDURE err : IOChannel <*INLINE*>; (* for use by RTS *)
PROCEDURE SetStdIn ( chan : IOChannel; VAR status : IOStatus );
PROCEDURE SetStdOut ( chan : IOChannel; VAR status : IOStatus );
PROCEDURE SetStdErr ( chan : IOChannel; VAR status : IOStatus );
END StdIO.

```

### IOChannel

```

DEFINITION MODULE IOChannel;
(** Generic IO Channel Type *)
IMPORT IOStatus, IOAccessMode, IOSize;
TYPE IOChannel = POINTER TO Descriptor;
TYPE Descriptor = RECORD ( NIL )
  (* method slots for status handling *)
  statusOf : PROCEDURE ( IOChannel ) : IOStatus;
  StatusMsg : PROCEDURE ( IOChannel; IOStatus );
  SetStatus : PROCEDURE ( IOChannel; IOStatus; BOOLEAN );
  (* method slots for access mode query *)
  isReadable : PROCEDURE ( IOChannel ) : BOOLEAN;
  isWritable : PROCEDURE ( IOChannel ) : BOOLEAN;
  (* method slots for generic input *)
  dataReady : PROCEDURE ( IOChannel; IOSize ) : BOOLEAN;
  ReadOctet : PROCEDURE ( IOChannel; VAR OCTET );
  ReadBlock : PROCEDURE ( IOChannel; VAR ARRAY OF OCTET );
  insertReady : PROCEDURE ( IOChannel ) : BOOLEAN;
  Insert : PROCEDURE ( IOChannel; OCTET );
  (* method slots for generic output *)
  WriteOctet : PROCEDURE ( IOChannel; OCTET );
  WriteBlock : PROCEDURE ( IOChannel; ARRAY OF OCTET; VAR IOSize );
  isFlushable : PROCEDURE ( IOChannel ) : BOOLEAN;
  Flush : PROCEDURE ( IOChannel )
END; (*Descriptor*)
END IOChannel.

```

### IOSize

```

DEFINITION MODULE IOSize;
TYPE IOSize = ALIAS OF LONGCARD;
END IOSize.

```

On systems where the maximum file size exceeds `LONGCARD`, type `IOSize` may be redefined and the IO library rebuilt.

### IOAccessMode

```

DEFINITION MODULE IOAccessMode;
(** IO Access Mode Common to all Channel Drivers *)
CONST
  RO = { Flags.Read };
  WO = { Flags.Write };
  RW = { Flags.Read, Flags.Write };
TYPE IOAccessMode = SET OF Flags;
TYPE Flags =
  ( Read,      (* reading is permitted if set *)
    Write );  (* writing is permitted if set *)
END IOAccessMode.

```

## FileChannel

```

DEFINITION MODULE FileChannel;
(** FileIO Specific IO Channel Type *)
IMPORT IOChannel, IOStatus, FileMode, IOSize, FileIO;
TYPE FileChannel = POINTER TO Descriptor;
PROCEDURE [NEW] New ( VAR chan : FileChannel ); (* allocates channel, initialises method slots *)
PROCEDURE [RETAIN] Retain ( VAR chan : FileChannel ); (* prevents inadvertent closing of channel *)
PROCEDURE [RELEASE] Release ( VAR chan : FileChannel ); (* closes channel when refcount is zero *)
PROCEDURE isFileChannel ( chan : IOChannel ) : BOOLEAN;
TYPE FilePos = ALIAS OF IOSize;
TYPE Descriptor = RECORD ( IOChannel )
  (* inherits generic channel method slots *)
  (* FileChannel specific method slots *)
  Open : PROCEDURE ( FileChannel; (*filename:*) CONST ARRAY OF CHAR; FileMode; VAR IOStatus );
  ReOpen : PROCEDURE ( FileChannel; FileMode );
  (* method slots for access mode and filename query *)
  modeOf : PROCEDURE ( FileChannel ) : FileMode;
  nameLen : PROCEDURE ( FileChannel ) : LONGCARD;
  GetName : PROCEDURE ( FileChannel; (*filename:*) VAR ARRAY OF CHAR );
  (* positioning *)
  isValidPos : PROCEDURE ( FileChannel; FilePos ) : FilePos;
  lastValidSetPos : PROCEDURE ( FileChannel ) : FilePos;
  SetPos : PROCEDURE ( FileChannel; (*position:*) FilePos );
  Advance : PROCEDURE ( FileChannel; (*offset:*) FilePos );
  Rewind : PROCEDURE ( FileChannel );
  handle : FileIO.File (* file handle is a FileIO handle *)
END; (*Descriptor*)
END FileChannel.

```

## FileIO

```

DEFINITION MODULE FileIO; (* Abstract Low-level File IO *)
IMPORT IOSize, IOStatus, FileMode;
TYPE File = OPAQUE; FilePos = ALIAS OF IOSize;
(*!!!*) PROCEDURE defaultInFile : File; PROCEDURE defaultOutFile : File; PROCEDURE defaultErrFile : File;
PROCEDURE isValidAccessor ( file : File ) : BOOLEAN;
PROCEDURE isSpecialFile ( file : File ) : BOOLEAN;
PROCEDURE Open ( NEW file : File; CONST filename : ARRAY OF CHAR; mode : FileMode; VAR status : IOStatus );
PROCEDURE ReOpen ( file : File; mode : FileMode );
PROCEDURE statusOf ( file : File ) : IOStatus;
PROCEDURE StatusMsg ( file : File; status : IOStatus );
PROCEDURE SetStatus ( file : File; status : IOStatus; VAR valid : BOOLEAN );
PROCEDURE modeOf ( file : File ) : FileMode;
PROCEDURE nameLen ( file : File ) : CARDINAL;
PROCEDURE GetName ( file : File; VAR filename : ARRAY OF CHAR );
PROCEDURE eof ( file : File ) : BOOLEAN;
PROCEDURE currentPos ( file : File ) : FilePos;
PROCEDURE isValidPos ( file : File; pos : FilePos ) : BOOLEAN;
PROCEDURE lastValidSetPos ( file : File ) : FilePos;
PROCEDURE SetPos ( file : File; pos : FilePos );
PROCEDURE Advance ( file : File; offset : FilePos );
PROCEDURE Rewind ( file : File );
PROCEDURE dataReady ( file : File; octets : IOSize ) : BOOLEAN;
PROCEDURE ReadOctet ( file : File; VAR data : OCTET );
PROCEDURE ReadBlock ( file : File; VAR data : ARRAY OF OCTET );
PROCEDURE insertReady ( file : File ) : BOOLEAN;
PROCEDURE Insert ( file : File; data : OCTET );
PROCEDURE WriteOctet ( file : File; data : OCTET );
PROCEDURE WriteBlock ( file : File; data : ARRAY OF OCTET; VAR octetsWritten : IOSize );
PROCEDURE isFlushable ( file : File ) : BOOLEAN;
PROCEDURE Flush ( file : File );
PROCEDURE Close ( VAR file : File; VAR status : IOStatus );
END FileIO.

```

## IOStatus

```

DEFINITION MODULE IOStatus;
IMPORT Status, StatusCode;
TYPE IOStatus = RECORD ( Status )
  (* inherits failed : BOOLEAN *)
  code : IOStatusCode
END; (*IOStatus*)
END IOStatus.

```

## DecimalSep

```

DEFINITION MODULE DecimalSep;
  (* Used for Formatted Output *)
TYPE Mode = ( Comma, Point );
PROCEDURE mode : Mode;
PROCEDURE SetMode ( mode : Mode );
  (* default setting is locale dependent *)
END DecimalSep.

```

## IOStatusCode

```

DEFINITION MODULE IOStatusCode;
TYPE IOStatusCode =
  ( +StatusCode,          (* inherits Success and Failure *)
    FileNotFound,         (* no file found with this filename *)
    NameTooLong,          (* the passed filename is too long *)
    IllegalCharsInName,   (* illegal chars in passed filename *)
    InvalidMode,          (* the passed mode is invalid *)
    AlreadyOpen,          (* the passed file is already open *)
    MayNotOpenDirectory,  (* attempt to open a directory *)
    AccessDenied,         (* the filesystem denied file access *)
    AccessBeyondEOF,      (* attempt to read past end of file *)
    NotOpenForReading,    (* file is not in Read mode *)
    NotOpenForWriting,    (* file is not in Write/Append mode *)
    OutOfRange,           (* input data is out of target range *)
    WrongFormat,          (* input data is in unexpected format *)
    UnexpectedEndOfLine,  (* unexpected end-of-line in input *)
    UnexpectedEndOfInput, (* unexpected end of input data *)
    ConnectionClosed,     (* remote end closed the connection *)
    InvalidFilePos,       (* attempt to set a invalid position *)
    InsertBufferFull,     (* capacity of insert buffer exceeded *)
    FileSizeLimitExceeded, (* attempt to write past size limit *)
    OpenFileLimitExceeded, (* attempt to open too many files *)
    OperationNotSupported, (* unsupported operation attempted *)
    DeviceFull,           (* the device capacity is exceeded *)
    DeviceError );        (* the device reported a failure *)
END IOStatusCode.

```

## FileMode

```

DEFINITION MODULE FileMode;
IMPORT IOAccessMode;
CONST
  RO = { Flags.Read };
  WO = { Flags.Write };
  RW = { Flags.Read, Flags.Write };
TYPE FileMode = SET OF Flags;
  (* The file access mode consists of four flags: read, write, append and sync.
     These flags may be combined arbitrarily, subject to the following rules:
     (1) a file mode may not be the empty set
     (2) append may not be set if read is set
     (3) append may only be set if write is set
     (4) sync may only be set if write is set *)
TYPE Flags =
  ( +IOAccessMode.Flags, (* inherits Read and Write *)
    Append,              (* writing always appends if set *)
    Sync );              (* writing always flushes if set *)
PROCEDURE isValid ( mode : FileMode ) : BOOLEAN;
  (* Returns TRUE if mode is a valid file access mode, otherwise FALSE. *)
END FileMode.

```

## Tabulator

```

DEFINITION MODULE Tabulator; (* "\t" *)
TYPE Range = [0..80] OF CARDINAL;
PROCEDURE width : Range;
PROCEDURE SetWidth ( width : Range );
END Tabulator. (* default setting is 0 *)

```

## Newline

```

DEFINITION MODULE Newline; (* "\n" *)
TYPE Mode = ( LF, CR, CRLF );
PROCEDURE mode : Mode;
PROCEDURE SetMode ( mode : Mode );
END Newline. (* OS dependent default *)

```



## Low-Level File IO

### FilePtrIO

```

DEFINITION MODULE FilePtrIO; (* Low-level File IO *)
IMPORT IOSize, IOStatus, FileMode;
CONST DefaultBufferSize = 1024*16 (*16 KOctets*)
TYPE File = OPAQUE; FilePos = ALIAS OF IOSize;
(*!!!*) PROCEDURE defaultInFile : File; PROCEDURE defaultOutFile : File; PROCEDURE defaultErrFile : File;
PROCEDURE isValidAccessor ( file : File ) : BOOLEAN;
PROCEDURE isSpecialFile ( file : File ) : BOOLEAN;
PROCEDURE Open ( NEW file : File; CONST filename : ARRAY OF CHAR; mode : FileMode; VAR status : IOStatus );
PROCEDURE OpenWithBufferSize
  ( NEW file : File; CONST filename : ARRAY OF CHAR; mode : FileMode; bufSize : IOSize; VAR status : IOStatus );
PROCEDURE ReOpen ( file : File; mode : FileMode );
PROCEDURE statusOf ( file : File ) : IOStatus;
PROCEDURE StatusMsg ( file : File; status : IOStatus );
PROCEDURE SetStatus ( file : File; status : IOStatus; VAR valid : BOOLEAN );
PROCEDURE modeOf ( file : File ) : FileMode;
PROCEDURE namelen ( file : File ) : CARDINAL;
PROCEDURE GetName ( file : File; VAR filename : ARRAY OF CHAR );
PROCEDURE eof ( file : File ) : BOOLEAN;
PROCEDURE currentPos ( file : File ) : FilePos;
PROCEDURE isValidPos ( file : File; pos : FilePos ) : BOOLEAN;
PROCEDURE lastValidSetPos ( file : File ) : FilePos;
PROCEDURE SetPos ( file : File; pos : FilePos );
PROCEDURE Advance ( file : File; offset : FilePos );
PROCEDURE Rewind ( file : File );
PROCEDURE dataReady ( file : File; octets : IOSize ) : BOOLEAN;
PROCEDURE ReadOctet ( file : File; VAR data : OCTET );
PROCEDURE ReadBlock ( file : File; VAR data : ARRAY OF OCTET );
PROCEDURE insertReady ( file : File ) : BOOLEAN;
PROCEDURE Insert ( file : File; data : OCTET );
PROCEDURE WriteOctet ( file : File; data : OCTET );
PROCEDURE WriteBlock ( file : File; data : ARRAY OF OCTET; VAR octetsWritten : IOSize );
PROCEDURE isFlushable ( file : File ) : BOOLEAN;
PROCEDURE Flush ( file : File );
PROCEDURE Close ( VAR file : File; VAR status : IOStatus );
END FilePtrIO.

```

### FileDescIO

```

DEFINITION MODULE FileDescIO; (* Low-level File IO *)
IMPORT IOSize, IOStatus, FileMode;
CONST InvalidFile = -1;
TYPE File = INTEGER; FilePos = ALIAS OF IOSize; RelPos = ALIAS OF LONGINT; From = ( Start, Current, End );
(*!!!*) PROCEDURE defaultInFile : File; PROCEDURE defaultOutFile : File; PROCEDURE defaultErrFile : File;
PROCEDURE Open ( VAR fd : File; CONST filename : ARRAY OF CHAR; mode : FileMode; VAR status : IOStatus );
PROCEDURE modeOf ( fd : File ) : FileMode;
PROCEDURE statusOf ( fd : File ) : IOStatus;
PROCEDURE isValidFile ( fd : File ) : BOOLEAN;
PROCEDURE isSpecialFile ( fd : File ) : BOOLEAN;
PROCEDURE Read ( fd : File; VAR data : OCTET );
PROCEDURE ReadBlock ( fd : File; VAR data : ARRAY OF OCTET; octetsRead : IOSize );
PROCEDURE ReadBlockAtOffset ( fd : File; VAR data : ARRAY OF OCTET; VAR octetsRead : IOSize; offset : FilePos );
PROCEDURE Write ( fd : File; data : OCTET );
PROCEDURE WriteBlock ( fd : File; CONST data : ARRAY OF OCTET; octetsWritten : IOSize );
PROCEDURE WriteBlockAtOffset ( fd : File; data : ARRAY OF OCTET; VAR octetsRead : IOSize; offset : FilePos );
PROCEDURE eof ( fd : File ) : BOOLEAN;
PROCEDURE SetPos ( fd : File; pos : FilePos );
PROCEDURE Advance ( fd : File; offset : FilePos );
PROCEDURE Rewind ( fd : File );
PROCEDURE SetRelPos ( fd : File; from : From; offset : RelPos; VAR newPos : FilePos );
PROCEDURE Close ( VAR fd : File; VAR status : IOStatus );
PROCEDURE CloseAll ( VAR status : IOStatus );
END FileDescIO.

```

## Appendix H

# IO Library Format Specifiers

### Format Specifier Syntax for Type BOOLEAN

```
boolFmtStr := shortBool | longBool ;
shortBool := '[' ( trueSym | falseSym ) ']' ;
alias trueSym, falseSym = PrintableChar ;
longBool := 'TF' | 'Tf' | 'tf' | 'YN' | 'Yn' | 'yn' ;
```

```
WRITE #("TF", bool); (*TRUE or FALSE*) WRITE #("[0|1]", bool); (*0 or 1*)
```

### Format Specifier Syntax for Character Types

```
charFmt := quoted? glyph | codePoint ;
quoted := 'Q' | 'QQ' ;
glyph = 'A' | 'UTF8' ;
codePoint := 'U+' digitCount | '0u' digitFmt? ;
digitFmt := digitCount digitGrouping? ;
digitCount := leastNumOfDigits | fixedNumOfDigits ;
alias leastNumOfDigits = '*' ;
fixedNumOfDigits := Digit+ ;
digitGrouping := digitSep digitsPerGroup ;
digitSep := localeDependent | apostrophe | space ;
alias digitsPerGroup = fixedNumOfDigits ;
alias localeDependent = ':' ;
alias apostrophe = "'" ;
alias space = ' ' ;
```

```
WRITE #("Q", char); (*'$'*) WRITE #("QQ", char); (*"$"*) WRITE #("0u8'2", char); (*0u00'00'00'24*)
```

### Format Specifier Syntax for Type OCTET

```
octetFmt := decimalOctet | octetBase16 | base2 ;
decimalOctet := leadSpace? compact | leadZeroes ;
alias leadSpace = '_' ;
alias leadZeroes = 'Z' ;
alias compact = '*' ;
octetBase16 := '0x' | 'X' ;
base2 := ( '0b' | 'B' ) digitFmt ;
```

```
WRITE #("0x", n); (*0x2A*) WRITE #("Z", n); (*042*) WRITE #("0b8'4", n); (*0b0010'1010*)
```

## Format Specifier Syntax for Cardinal Types

```

cardinalFmt := decimalCardinal | base16 | base2 ;
decimalCardinal := leadZeroes? ( digitFmt justification? )? ;
alias leadZeroes = 'Z' ;
digitFmt := intDigits digitGrouping? ;
alias intDigits, digitsPerGroup = digitCount ;
digitCount := Digit+ ;
digitGrouping := digitSep digitsPerGroup ;
digitSep := ':' | '_' | "" ;
justification := '|' position '|' ;
position := '<' | '>' ;
base16 := ( '0x' | 'X' ) digitFmt ;
base2 := ( '0b' | 'B' ) digitFmt ;

```

## Format Specifier Syntax for Integer Types

```

integerFmt := sign? decimalCardinal | base16 | base2 ;
sign := '+' | '-' ;

```

```

WRITE #("0x", i); (*0x2A*) WRITE #("Z", i); (*042*) WRITE #("0b8'4", i); (*0b0010'1010*)

```

## Format Specifier Syntax for Real Number Types

```

realFmt := engOrSciFmt | acctFmt ;
engOrSciFmt := ( 'E' )? sign? significand exponent? justification? ;
sign := '+' | '-' ;
significand := intDigits digitGrouping? ';' fracDigits digitGrouping? ;
digitGrouping := ':' digitsPerGroup ;
exponent := 'e' sign? expDigits digitGrouping? ;
alias intDigits, fracDigits, expDigits, digitsPerGroup = digitCount ;
digitCount := Digit+ ;
acctFmt := 'A' ( standard | ledger ) ;
standard := ( sign spacer? | spacer sign ) significand ;
alias spacer = '_' ;
ledger := filler? significand acctSign ;
filler := '*' | '=' ;
acctSign := 'CR' | '(' ;

```

```

WRITE #("E-2;9e3", r); (* 12.345,678,900e006*) WRITE #("A7:3;2_CR", r); (*1,234,567.89 CR*)

```

## Format Specifier Syntax for Character Arrays

```

strFmt := quoted? glyphs ;
quoted := 'Q' | 'QQ' ;
glyphs = 'A' | 'UTF8' ;

```

## Format Specifier Syntax for Non-Character Arrays

```

arrayFmt := '{' itemSep '}' ( '|' valueFmt )? ;
itemSep := ( ',' | ';' )? '_' ;
valueFmt := boolFmt | octetFmt | cardinalFmt | integerFmt | realFmt ;

```

# Supplementary Material

Library interfaces **not** included in the printed edition.

## Templating

Libraries for expanding placeholders in templates.

### StringTE, UniStringTE

```
DEFINITION MODULE <#StringTypeIdent#>TE;
IMPORT <#StringTypeIdent#>, Status;
CONST MaxKeyLength = 32;
TYPE Key = ARRAY MaxKeyLength OF CHAR;
CONST MaxValueLength = 80;
TYPE Value = ARRAY MaxValueLength OF <#CharTypeIdent#>;
TYPE KeyValuePair = RECORD
    key : Key; value : Value
END; (*KeyValuePair*)
PROCEDURE expandWithList
    ( CONST template, openingDelim, closingDelim : ARRAY OF <#CharTypeIdent#>;
      list : ARGLIST OF KeyValuePair; VAR status : Status ) : String;
PROCEDURE expandWithDict
    ( CONST template, openingDelim, closingDelim : ARRAY OF <#CharTypeIdent#>;
      dict : KeyValueDict; VAR status : Status ) : String;
END <#StringTypeIdent#>TE.
```

Replace <#StringTypeIdent#> with String / UniString and <#CharTypeIdent#> with CHAR / UNICHAR .

## Regular Expression IO

Libraries for IO through regular expressions.

### CharRegexIO, UnicharRegexIO

```
DEFINITION MODULE <#TitlecasedCharTypeIdent#>RegexIO;
IMPORT IOChannel, <#TitlecasedCharTypeIdent#>RegexNFA, RegexStatus;
PROCEDURE SkipMatchingStr
    ( chan : IOChannel; nfa : <#TitlecasedCharTypeIdent#>RegexNFA; VAR status : RegexStatus );
PROCEDURE ReadMatchingStr
    ( chan : IOChannel; nfa : <#TitlecasedCharTypeIdent#>RegexNFA;
      VAR str : ARRAY OF <#CharTypeIdent#>; VAR status : RegexStatus );
PROCEDURE WriteMatchingStr
    ( chan : IOChannel; nfa : <#TitlecasedCharTypeIdent#>RegexNFA;
      CONST str : ARRAY OF <#CharTypeIdent#>; VAR status : RegexStatus );
```

Replace <#CharTypeIdent#> with CHAR / UNICHAR and <#TitlecasedCharTypeIdent#> with Char / Unichar .

## Regular Expression Conversion

Libraries for converting regular expressions between AWK and Modula-2.

### CharRegexConv, UnicharRegexConv

```
DEFINITION MODULE <#TitlecasedCharTypeIdent#>RegexConv;
IMPORT <#StringTypeIdent#>, RegexStatus;
PROCEDURE awkToM2 ( CONST awkRe : ARRAY OF <#CharTypeIdent#>; VAR status : RegexStatus ) : <#StringTypeIdent#>;
PROCEDURE m2ToAwk ( CONST m2Re : ARRAY OF <#CharTypeIdent#>; VAR status : RegexStatus ) : <#StringTypeIdent#>;
END <#TitlecasedCharTypeIdent#>RegexConv.
```

Replace <#StringTypeIdent#> with String / UniString and <#TitlecasedCharTypeIdent#> with Char / Unichar .

## Alternative File Channels

File channels bypassing the `FileIO` abstraction layer.

### FPChannel

```

DEFINITION MODULE FPChannel;
(** FilePtrIO Specific IO Channel Type *)
IMPORT IOChannel, IOStatus, FileMode, IOSize, FilePtrIO;
TYPE FPChannel = POINTER TO Descriptor;
PROCEDURE [NEW] New ( VAR chan : FPChannel ); (* allocates channel, initialises method slots *)
PROCEDURE [RETAIN] Retain ( VAR chan : FPChannel ); (* prevents inadvertent closing of channel *)
PROCEDURE [RELEASE] Release ( VAR chan : FPChannel ); (* closes channel when refcount is zero *)
PROCEDURE isFPChannel ( chan : IOChannel ) : BOOLEAN;
CONST DefaultBufferSize = FilePtrIO.DefaultBufferSize;
TYPE FilePos = ALIAS OF IOSize;
TYPE Descriptor = RECORD ( IOChannel )
  (* inherits generic channel method slots *)
  (* FPChannel specific method slots *)
  Open : PROCEDURE ( FPChannel; (*filename:*) CONST ARRAY OF CHAR; FileMode, VAR IOStatus );
  OpenWithBufferSize :
    PROCEDURE ( FPChannel; (*filename:*) CONST ARRAY OF CHAR; FileMode; IOSize; VAR IOStatus );
  ReOpen : PROCEDURE ( FPChannel; FileMode );
  (* method slots for access mode and filename query *)
  modeOf : PROCEDURE ( FPChannel ) : FileMode;
  namelen : PROCEDURE ( FPChannel ) : LONGCARD;
  GetName : PROCEDURE ( FPChannel; (*filename:*) VAR ARRAY OF CHAR );
  (* positioning *)
  isValidPos : PROCEDURE ( FPChannel; FilePos ) : FilePos;
  lastValidSetPos : PROCEDURE ( FPChannel ) : FilePos;
  SetPos : PROCEDURE ( FPChannel; (*position:*) FilePos );
  Advance : PROCEDURE ( FPChannel; (*offset:*) FilePos );
  Rewind : PROCEDURE ( FPChannel );
  handle : FilePtrIO.File (* file handle is a file pointer *)
END; (*Descriptor*)
END FPChannel.

```

### FDChannel

```

DEFINITION MODULE FDChannel;
(** FileDescIO Specific IO Channel Type *)
IMPORT IOChannel, IOStatus, FileMode, IOSize, FileDescIO;
TYPE FDChannel = POINTER TO Descriptor;
PROCEDURE [NEW] New ( VAR chan : FDChannel ); (* allocates channel, initialises method slots *)
PROCEDURE [RETAIN] Retain ( VAR chan : FDChannel ); (* prevents inadvertent closing of channel *)
PROCEDURE [RELEASE] Release ( VAR chan : FDChannel ); (* closes channel when refcount is zero *)
PROCEDURE isFDChannel ( chan : IOChannel ) : BOOLEAN;
TYPE FilePos = ALIAS OF IOSize;
TYPE Descriptor = RECORD ( IOChannel )
  (* inherits generic channel method slots *)
  (* FDChannel specific method slots *)
  Open : PROCEDURE ( FDChannel; (*filename:*) CONST ARRAY OF CHAR; FileMode; VAR IOStatus );
  ReOpen : PROCEDURE ( FDChannel; FileMode );
  (* method slots for access mode and filename query *)
  modeOf : PROCEDURE ( FDChannel ) : FileMode;
  namelen : PROCEDURE ( FDChannel ) : LONGCARD;
  GetName : PROCEDURE ( FDChannel; (*filename:*) VAR ARRAY OF CHAR );
  (* positioning *)
  isValidPos : PROCEDURE ( FDChannel; FilePos ) : FilePos;
  lastValidSetPos : PROCEDURE ( FileDescChannel ) : FilePos;
  SetPos : PROCEDURE ( FDChannel; (*position:*) FilePos );
  Advance : PROCEDURE ( FDChannel; (*offset:*) FilePos );
  Rewind : PROCEDURE ( FDChannel );
  handle : FileDescIO.File (* file handle is a token, falsely called "file descriptor" *)
END; (*Descriptor*)
END FDChannel.

```

## Character Sets

### CharSet

```

DEFINITION MODULE CharSet;
TYPE CharSet = RECORD segment : OCTETSEQ [16] END;
(* element insertion and removal *)
PROCEDURE Insert ( VAR set : CharSet; chars : ARGLIST OF CHAR );
PROCEDURE InsertAll ( VAR set : CharSet );
PROCEDURE Remove ( VAR set : CharSet; chars : ARGLIST OF CHAR );
PROCEDURE RemoveAll ( VAR set : CharSet );
(* membership and subset tests *)
PROCEDURE isSubset ( CONST set1, set2 : CharSet ) : BOOLEAN;
PROCEDURE isSubsetOrEq ( CONST set1, set2 : CharSet ) : BOOLEAN;
PROCEDURE charsInSet ( CONST set : CharSet; chars : ARGLIST OF CHAR ) : BOOLEAN;
(* set operations *)
PROCEDURE setUnion ( CONST set1, set2 : CharSet ) : CharSet;
PROCEDURE setDiff ( CONST set1, set2 : CharSet ) : CharSet;
PROCEDURE interSet ( CONST set1, set2 : CharSet ) : CharSet;
PROCEDURE symDiff ( CONST set1, set2 : CharSet ) : CharSet;
END CharSet.

```

### CharSetIO

```

DEFINITION MODULE CharSetIO;
IMPORT CharSet, IOChannel;
PROCEDURE [READ] Read ( chan : IOChannel; VAR value : CharSet );
PROCEDURE [WRITE] Write ( chan : IOChannel; value : CharSet );
PROCEDURE [WRITE#] WriteF ( chan : IOChannel; CONST fmtStr : ARRAY OF CHAR; value : CharSet );
END CharSetIO.

```

## Numeric Subrange Types

### QUARTET

```

DEFINITION MODULE QUARTET;
TYPE QUARTET = [0..15] OF OCTET;
END QUARTET.

```

### SEPTET

```

DEFINITION MODULE SEPTET;
TYPE SEPTET = [0..127] OF OCTET;
END SEPTET.

```

### POSINT

```

DEFINITION MODULE POSINT;
TYPE POSINT = [0..TMAX(INTEGER)] OF INTEGER;
END POSINT.

```

### LONGPOSINT

```

DEFINITION MODULE LONGPOSINT;
TYPE LONGPOSINT = [0..TMAX(LONGINT)] OF LONGINT;
END LONGPOSINT.

```

## Legacy Functions

### Legacy

```

DEFINITION MODULE Legacy;
(* primarily for documentation, actual use is discouraged *)
PROCEDURE CAP ( ch : CHAR ) : CHAR; (* better: replace with Char.toUpper() *)
PROCEDURE FLOAT ( i : INTEGER ) : REAL; (* better: replace with i::REAL *)
PROCEDURE TRUNC ( r : REAL ) : INTEGER; (* better: replace with RealMath.trunc(r)::INTEGER *)
(* PROCEDURE HIGH ( a : ARRAY OF T ); replace with COUNT(a)—1 *)
(* PROCEDURE HIGH ( str : ARRAY OF CHAR ); replace with LENGTH(str)—1 *)
(* PROCEDURE MAX/MIN ( x : T ); replace with TMAX/TMIN(x) *)
(* PROCEDURE SIZE ( T ); replace with TSIZE(T) *)
(* PROCEDURE VAL ( T, v ) : T; replace with v::T *)
(* PROCEDURE INC/DEC ( n ); replace with n++/n— *)
(* PROCEDURE INCL/EXCL ( s, e ); replace with INSERT/REMOVE(s, e) *)
END Legacy.

```

# Atomic Operations

Built-in module `ATOMIC` provides type-safe atomic operations. Its provision is **optional**.

## ATOMIC

```

DEFINITION MODULE ATOMIC; (* OPTIONAL *)
(* Atomic Operations *)
TYPE OPERATION =
  ( SWAP,      (* atomic swap *)
    CAS,      (* atomic compare and swap *)
    INC,      (* atomic increment *)
    DEC,      (* atomic decrement *)
    BWAND,    (* atomic bitwise AND *)
    BWNAND,   (* atomic bitwise NAND *)
    BWOR,     (* atomic bitwise OR *)
    BWXOR );  (* atomic bitwise XOR *)

PROCEDURE AVAIL ( op : OPERATION; bitwidth : CARDINAL ) : BOOLEAN;
(* Returns TRUE if the given operation is available for the given bitwidth,
   otherwise FALSE. The value of bitwidth must be a compile time expression. *)

PROCEDURE SWAP = ( VAR target : T; newVal : T ) : T;
(* Atomically writes newVal to target and returns the prior value of target.
   Both arguments must be of the same type. The return type matches the argument type. *)

PROCEDURE CAS ( VAR target : T; oldVal, newVal : T ) : T;
(* Atomically compares oldVal and target. If they match, newVal is written to
   target and oldVal is returned. Otherwise, the prior value of target is returned.
   All arguments must be of the same type. The return type matches the argument type. *)

PROCEDURE INC ( VAR target : T; increment : T ) : T;
(* Atomically increments target by increment and returns the prior value of target.
   Both arguments must be of the same type, which must be a built-in whole number type.
   The increment must be larger than zero. The returned type matches the target type. *)

PROCEDURE DEC ( VAR target : T; decrement : T ) : T;
(* Atomically decrements target by decrement and returns the prior value of target.
   Both arguments must be of the same type, which must be a built-in whole number type.
   The decrement must be larger than zero. The returned type matches the target type. *)

PROCEDURE BWAND ( VAR target : T; mask : T ) : T;
(* Atomically performs bitwise AND of target and mask, writes the result to target and
   returns the prior value of target. The arguments may be of a built-in whole number type
   or a record with an octet sequence field. The returned type matches the target type. *)

PROCEDURE BWNAND ( VAR target : T; mask : T ) : T;
(* Atomically performs bitwise NAND of target and mask, writes the result to target and
   returns the prior value of target. The arguments may be of a built-in whole number type
   or a record with an octet sequence field. The returned type matches the target type. *)

PROCEDURE BWOR ( VAR target : T; mask : T ) : T;
(* Atomically performs bitwise OR of target and mask, writes the result to target and
   returns the prior value of target. The arguments may be of a built-in whole number type
   or a record with an octet sequence field. The returned type matches the target type. *)

PROCEDURE BWXOR ( VAR target : T; mask : T ) : T;
(* Atomically performs bitwise XOR of target and mask, writes the result to target and
   returns the prior value of target. The arguments may be of a built-in whole number type
   or a record with an octet sequence field. The returned type matches the target type. *)

END ATOMIC.

```

Functions of module `ATOMIC` may not be assigned nor passed as arguments to any procedure, function or macro.

## Inline Assembler

Built-in module `ASSEMBLER` provides a target dependent inline assembler facility. Its provision is **optional**.

### ASSEMBLER

```
DEFINITION MODULE ASSEMBLER; (* OPTIONAL *)
(* This module provides access to CPU registers and a raw machine code
 * inline facility. Use of this module is unsafe and non-portable.
 * All facilities are optional, subject to the following constraints:
 * o module ASSEMBLER may not be provided void of any facilities
 * o type REGISTER is required for SETREG and GETREG
 * o SETREG and GETREG are required if macro CODE is provided
 * o SETREG and GETREG may only be provided as a pair *)
CONST ARCH = <string constant with architecture name>;
TYPE REGISTER = <target architecture dependent enumeration type>;
(* Type REGISTER is a target architecture dependent enumeration
 * with mnemonics for the target architecture's registers. *)
(* Access to CPU registers *)
PROCEDURE SETREG( r : REGISTER; value : <ValueType> ) <*INLINE*>;
(* Copies <value> to register <r> where <value> may be of any type
 * as long as TSIZE(ValueType) does not exceed the bitwidth of <r>. *)
PROCEDURE GETREG( r : REGISTER; VAR value : <ValueType> ) <*INLINE*>;
(* Copies the contents of <r> to <value> where <value> may be of any
 * type as long as the bitwidth of <r> does not exceed TSIZE(ValueType). *)
(* Raw machine code inline facility *)
PROCEDURE CODE( <arglist> ) <*INLINE*>;
(* Inserts the raw machine code represented by <arglist>. Its EBNF is:
 * arglist := code ( ' , ' code ) * ;
 * code := <any constant expression of type [0..255] OF CARDINAL> ;
 * A compile time error occurs if any argument value is out of range. *)
END ASSEMBLER.
```

Procedures of module `ASSEMBLER` may not be assigned nor passed as arguments to any procedure, function or macro.

### AMD64 (aka x86-64)

```
CONST ARCH = "amd64";
TYPE REGISTER = ( ah, al, bh, bl, ch, cl, dh, dl, ax, bx, cx, dx, eax, ebx, ecx, edx, cs, ds, es, fs, gs,
ss, di, si, bp, sp, ip, edi, esi, ebp, esp, eip, eflags, rax, rbx, rcx, rdx, rsi, rdi, rsp, rbp, rflags,
r8, r9, r10, r11, r12, r13, r14, r15, r8d, r9d, r10d, r11d, r12d, r13d, r14d, r15d, r8w, r9w, r10w, r11w,
r12w, r13w, r14w, r15w, r8b, r9b, r10b, r11b, r12b, r13b, r14b, r15b, xmm0, xmm1, xmm2, xmm3, xmm4, xmm5,
xmm6, xmm7, xmm8, xmm9, xmm10, xmm11, xmm12, xmm13, xmm14, xmm15, ymm0, ymm1, ymm2, ymm3, ymm4, ymm5,
ymm6, ymm7, ymm8, ymm9, ymm10, ymm11, ymm12, ymm13, ymm14, ymm15 );
```

### ARM

```
CONST ARCH = "arm";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15 );
```

### Atmel AVR

```
CONST ARCH = "avr";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, x, y, z, rampx, rampy, rampz, rampd, eind );
```

### Intel MCS-51 (aka 8051)

```
CONST ARCH = "i8051";
TYPE REGISTER = ( a, b, r0, r1, r2, r3, r4, r6, r7, dp, sp, psw );
```

### Intel IA-32 (aka x86)

```
CONST ARCH = "x86";
TYPE REGISTER = ( ah, al, bh, bl, ch, cl, dh, dl, ax, bx, cx, dx, eax, ebx, ecx, edx, cs, ds, es, fs, gs,
ss, di, si, bp, sp, ip, edi, esi, ebp, esp, eip, eflags, xmm0, xmm1, xmm2, xmm3, xmm4, xmm5, xmm6, xmm7,
xmm8, xmm9, xmm10, xmm11, xmm12, xmm13, xmm14, xmm15, ymm0, ymm1, ymm2, ymm3, ymm4, ymm5, ymm6, ymm7,
ymm8, ymm9, ymm10, ymm11, ymm12, ymm13, ymm14, ymm15 );
```



**LatticeMico32**

```
CONST ARCH = "lm32";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
  r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, gp, fp, sp, ra, ea, ba, pc, ie, im, ip, icc,
  dcc, cc, cfg, eba );
```

**Xilinx MicroBlaze**

```
CONST ARCH = "microblaze";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
  r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, pc, msr, ear, esr, btr, fsr, edr, pid, zpr,
  tlblo, tlbhi, tlbx, tlbsx, pvr0, pvr1, pvr2, pvr3, pvr4, pvr5, pvr6, pvr7, pvr8, pvr9, pvr10, pvr11 );
```

**MIPS**

```
CONST ARCH = "mips";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
  r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, zero, at, v0, v1, a0, a1, a2, a3, t0, t1,
  t2, t3, t4, t5, t6, t7, s0, s1, s2, s3, s4, s5, s6, s7, t8, t9, k0, k1, gp, sp, fp, ra, s8 );
```

**Motorola M68K and ColdFire**

```
CONST ARCH = "m68k";
TYPE REGISTER = ( d0, d1, d2, d3, d4, d5, d6, d7, a0, a1, a2, a3, a4, a5, a6, a7, a7tick, sp, usp, ssp, pc, ccr );
```

**Texas Instruments MSP430**

```
CONST ARCH = "msp430";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15 );
```

**Altera Nios II**

```
CONST ARCH = "nios2";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
  r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, zero, at, et, bt, gp, sp, fp, ea, ba, ra );
```

**IBM PowerPC**

```
CONST ARCH = "ppc64";
TYPE REGISTER = ( r0, r1, r2, r3, r4, r5, r6, r7, r8, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19,
  r20, r21, r22, r23, r24, r25, r26, r27, r28, r29, r30, r31, fr0, fr1, fr2, fr3, fr4, fr5, fr6, fr7, fr8,
  fr9, fr10, fr11, fr12, fr13, fr14, fr15, fr16, fr17, fr18, fr19, fr20, fr21, fr22, fr23, fr24, fr25, fr26,
  fr27, fr28, fr29, fr30, fr31, cr, lr, ctr, xer, fpscr, pc );
```

**Berkeley University RISC-V**

```
CONST ARCH = "riscv";
TYPE REGISTER = ( x0, x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, x11, x12, x13, x14, x15, x16, x17, x18, x19,
  x20, x21, x22, x23, x24, x25, x26, x27, x28, x29, x30, x31, f0, f1, f2, f3, f4, f5, f6, f7, f8, f9, f10,
  f11, f12, f13, f14, f15, f16, f17, f18, f19, f20, f21, f22, f23, f24, f25, f26, f27, f28, f29, f30, f31 );
```

**Fujitsu/Oracle/Sun SPARC**

```
CONST ARCH = "sparc";
TYPE REGISTER = ( g0, g1, g2, g3, g4, g5, g6, g7, g8, g9, g10, g11, g12, g13, g14, g15, g16, g17, g18, g19,
  g20, g21, g22, g23, g24, g25, g26, g27, g28, g29, g30, g31 );
```

**Zilog Z80/eZ80**

```
CONST ARCH = "z80";
TYPE REGISTER = ( A, F, B, C, D, E, H, L, Atick, Ftick, Btick, Ctick, Dtick, Etick, Htick, Ltick, BC, DE, HL,
  Bctick, Detick, Hltick, PC, SPS, SPL, I, MBASE, ADL, MADL, IEF1, IEF2, R, IXH, IXL, IYL, IX, IY );
```

## Foreign Identifier Option

While the `FFIDENT` pragma is perfectly adequate for mapping Modula-2 identifiers to foreign API identifiers, the ability to define or declare certain foreign identifiers directly may be desirable on some platforms where the use of such identifiers is ubiquitous such as is the case on OpenVMS. For this purpose an **optional** language extension is specified below.

### Foreign Identifiers

In addition to letters and digits, a foreign identifier may contain leading, non-trailing, non-consecutive `$` characters and non-leading, non-trailing, non-consecutive `_` characters.

```
ForeignIdent :=
  '$' ( Letter | Digit ) ForeignIdentTail* | StdIdent ForeignIdentTail* ;
ForeignIdentTail :=
  ( '$' | '_' ) ( Letter | Digit )+ ;
```

Foreign identifiers must be disabled by default. Their use must be enabled by compiler option.

### Caution

The use of foreign identifiers will render source code **non-portable**.

The use of pragma `FFIDENT` should therefore be given preference.

### Implementation Notes

This language extension should only be deployed on implementations for platforms where the use of foreign identifiers is ubiquitous in the platform's operating system API.

If this language extension is deployed, it should be implemented **exactly** as specified in order to prevent potential conflicts with the Modula-2 core language not only at present but also in the future.

An implementation that provides this language extension should also provide a compiler switch to issue compile time informational messages for each use of a foreign identifier so that these uses can be easily located.

## Debugging Aid

During debugging it is useful to temporarily disable sections of source code. However, comment delimiters should categorically **never** be used for this purpose. Instead, language processors should provide syntax specifically for this purpose.

### Disabling Source Code

To temporarily disable a section of source code during debugging, the section may be enclosed by delimiters `?<` and `>?`. Such delimiters must be placed at the very beginning of a line to avoid accidental matches within a quoted string literal.

```
DisabledCodeSection :=
  '?<' /* strictly in first column of a line */
  ( AnyPrintable | BlockComment | EndOfLine )*
  '>?' /* strictly in first column of a line */ ;
AnyPrintable := 0u20 .. 0u7E ; /* greedy */
```

Where a language processor distinguishes between debug and production builds, the syntax should be automatically enabled when compiling in debug mode and disabled when compiling in production mode.

For every disabled section of source code a compile time warning should be emitted.