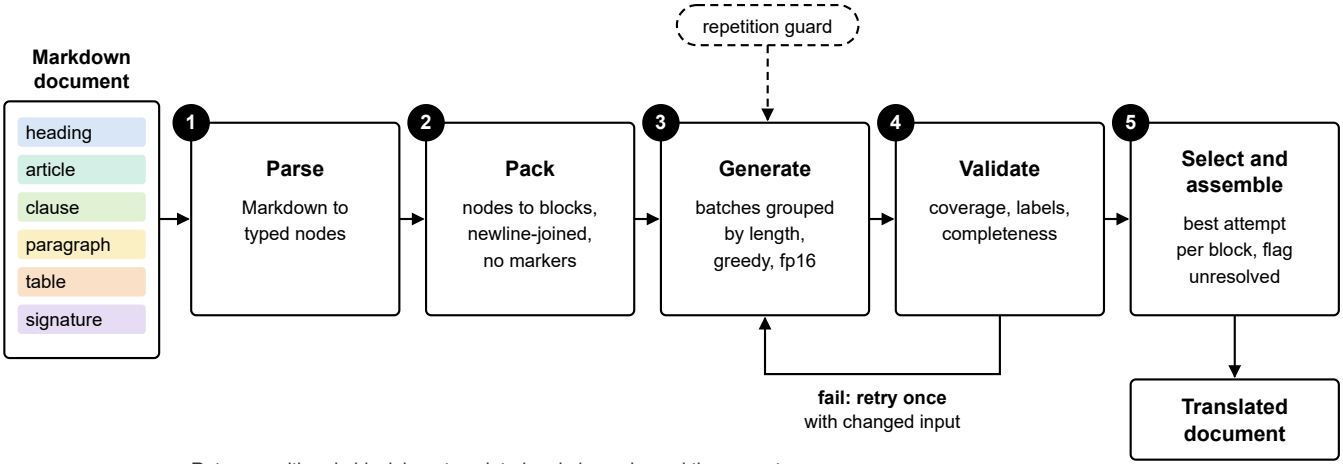


Retry: a multi-node block is re-translated node by node, and the prompt, token budget or repetition penalty is adjusted to the failure type.
An empty output keeps the source text, flagged.