aart n' ud

ten n Le nen

J ne 1

o t ts

The Parser 14
.1 Introduction 1
.2 Reference Guide 15
.3 Events 20
. Attributes 21
.5 Conditions 23

Logs, Error Codes and Debugging Info 3
7.1 Introduction 23

8 Appendix A - Table Description 5

9 Appendix B - Field Description

10 Appendix C - Database Structure 3

11 Appendix D - Poll Analysis 38

1 Appendix E - Example of Skill 40

13 Appendix F - Links to Visit 41

14 Appendix G - Glossary 4

0.1 License Notice

```
/*-----------------------------------------------------------------------
Maarten's Mud, WWW-based MUD using MYSQL
Copyright (C) 1999 Maarten van Leunen

This program is free software; you can redistribute it and/or
modify it under the terms of the GNU General Public License
as published by the Free Software Foundation; either version
of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  See the
```

0.3 About the Author

Well, let me introduce myself. I am nt n n un n, currently living in O , the Netherlands, Europe. ically, when I entered College I for the first time got into contact with Unix-like Operating systems, not by studying, but by joining in the local Internet Users Association Int nk. I acquired a lot of experience and knowledge there.

The first t to d cr tin mud, of course, , in on . I h n d to fr qu nt om time on An lon, h d 7(28(, -2 (in -28(time -28(on -282(h -282(m 28(bition -2
n3 , just

1 Installation

1.1 Root Privileged

.3 ooki

Coo n o nt nt t of th , th o d ch n for ch c n f c t n on bu ult n , . . h h u n t o d nt ult 2ct on th co ut ccount o h h u n t t o

2 Play g t ga

2. h ct D ult

Th fi n ttribut of ou ch ct

tr n th
ou c n c mon f ou tron .

Int nc (nt l kill

t lt (h c l kill
t lt um nt of t nd coordn tion. c l t
ho clum ou (o not .

Con titution

dom

Th fi n ttribut of n Elf

tr n th 2

Int nc (nt l kill 2

t lt (h c l kill

Con titution 2

dom 2

Th fi n ttribut of n f

tr n th 2

Int nc (nt l kill

t lt (h c l kill 2

Con titution 2

dom 0

Th fi n ttribut of t nd d um n

tr n th

Int nc (nt l kill

t lt (h c l kill

Con titution

1 dom 1

2. D m oll

A d m oll don n ond to ho much d m ou to do to ou o on nt. A f th n c n ct th mount of d m ou do, fo n t nc

mou

on

2.8 L nin nd Improvin You h ct

mn nd Im o n ou ch ct c n b don b lot of d nt .

k n bot (N C - Non Ch ct

ol n qu t

Th t o t n d bo and3(irning)]TJ/F15 9.963 Tf1-184762 0 lev(Impro)28(ving)-yourharacte nc ont . n nou n nc o nt h b n th .qu t 8(o -327(-" (on]T2 5 . 32 5. . 20 d[( ]TJ
n th

Special Tools

3.1 Mon ych n r Office

l ct . , . from tm _u nt bl , tm _u nt bl h r
.fi htln ho = .n m nd . l = 0 nd . l = 0 nd .room =
.room nd . od l= 2 nd .fi ht bl = l nd .fi ht bl = l;

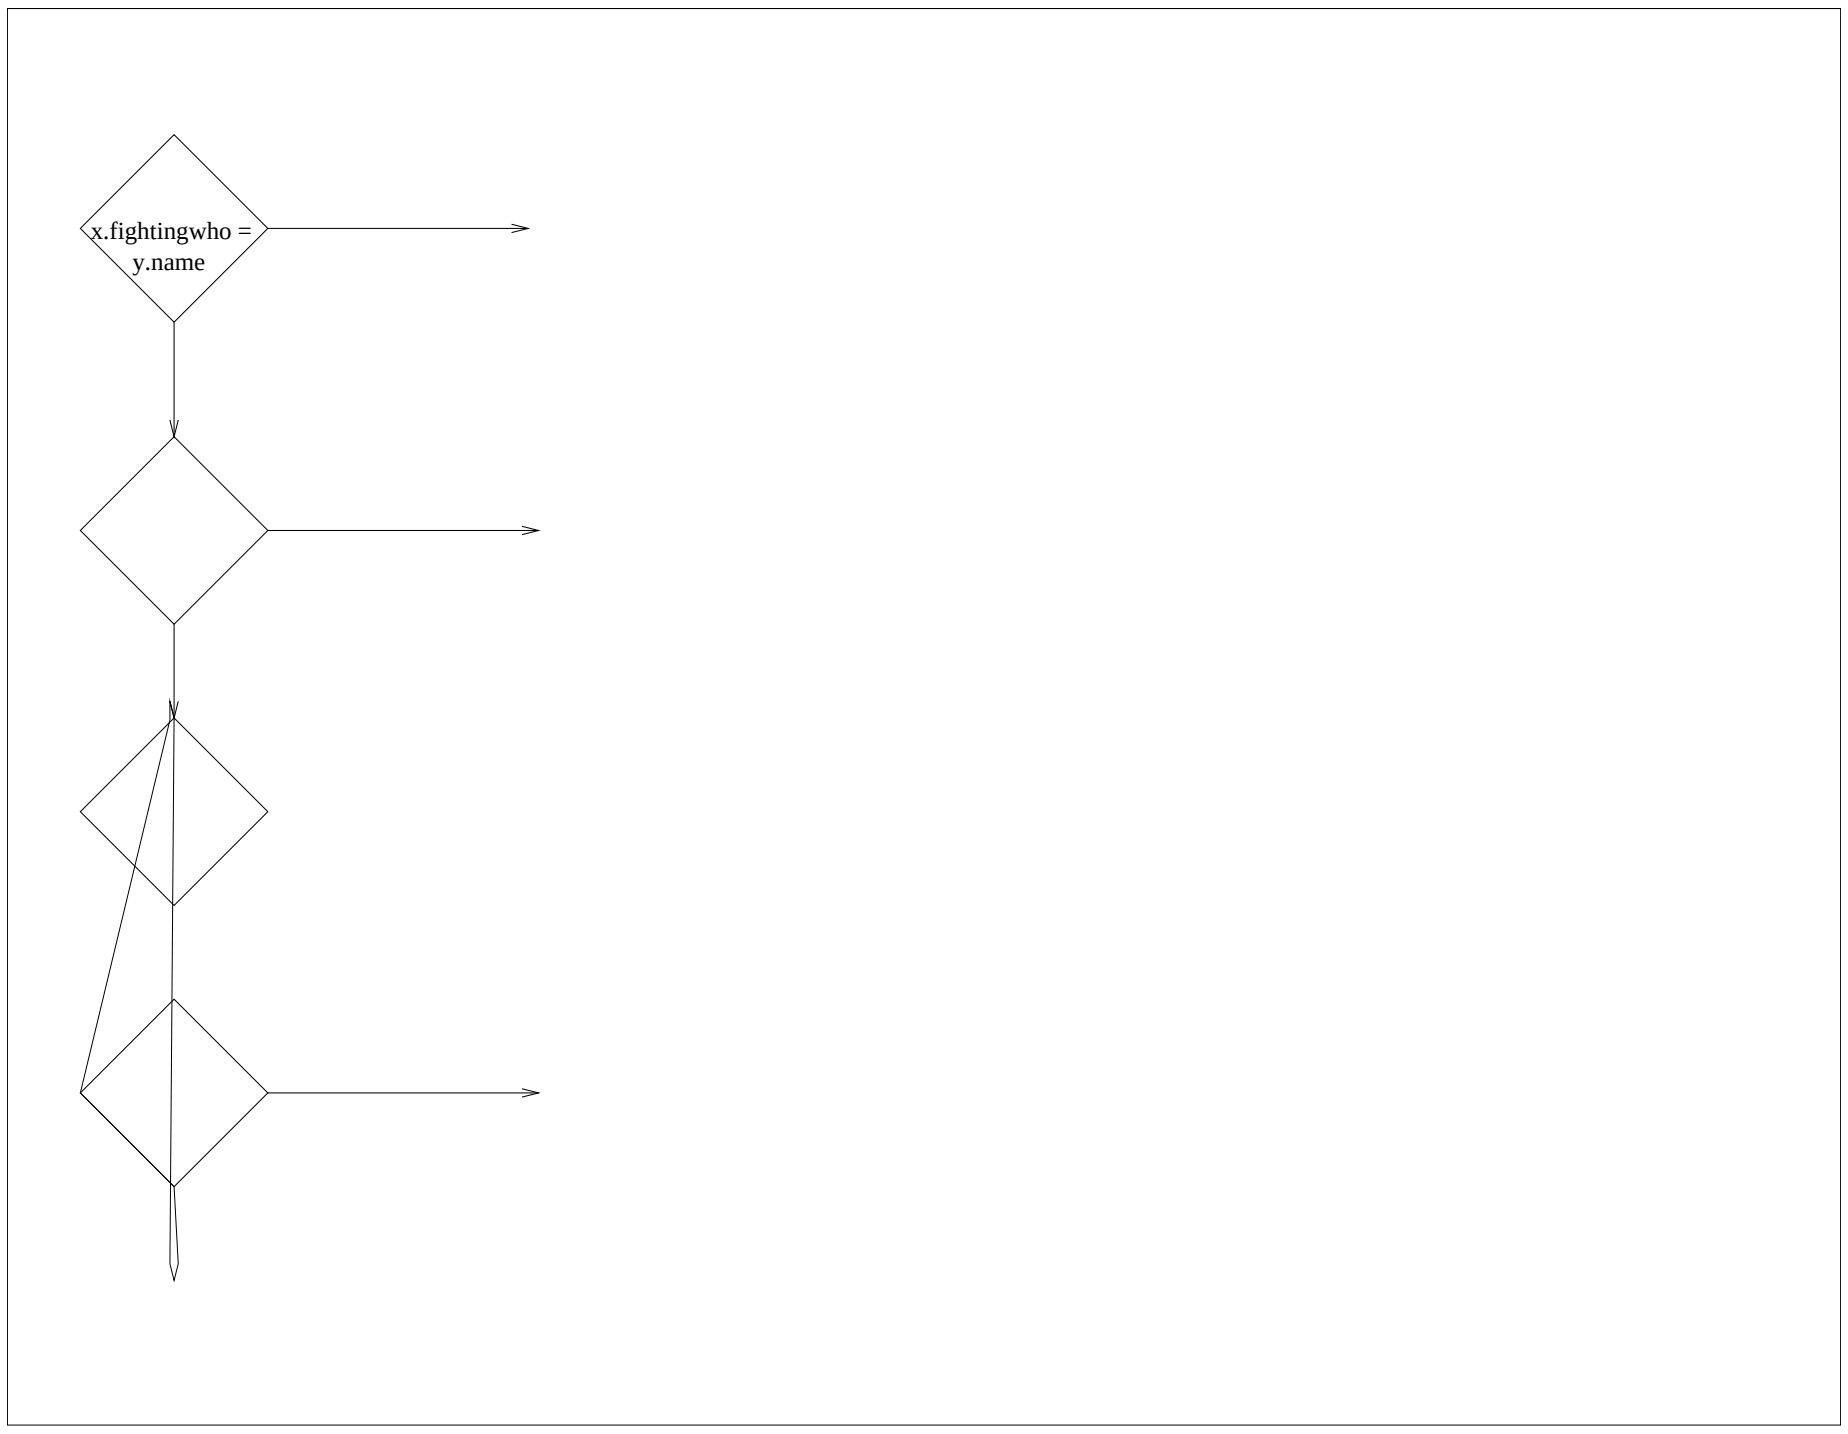
x.fightingwho =
y.name

.2 D n

E r lt m th t ou u ln comb t h both l d f n nd n ctl

Tot l d m f cton (on m l d m f cton i th tt c n' o n d m- f cton m nu th d f nd n' d f n d m f cton.

.3 n , in u y nd F ti u

. ic

5 G rat g M sc a o s F s

5. p

b c t d u n G . Th t t cont n d on th "t " nd th z = 2.

5.2 nn

nn fo u on oth b t b c t d u n G . uc du f- . 55Td[(nd -3(3

Note [illegible] this statement should be put immediately before the n-

efl roo $=\#$

```
if sql("select 1 from tm_usertable where name='$me' and room in [1,3,164]"
  say("Fighting is not allowed in this area.<BR>"
  sayeveryone("$me yawns.<BR>"
  showstandard
  end
return
```

"Go Down in Karcas Shop"

```
if sql("select 1 from tm_usertable where name='Karcas' and room=16"
  say("You try to move behind the counter, but Karcas immediately\
    intervenes.<BR>"
  sayeveryone("$me tries to move behind the counter, but Karcas immediately\
    intervenes.<BR>"
else
  # if second adject = "uadden" then the attic is closed
  # if second adject = "open" then the attic is open
  if sql("select 1 from items where adject ="uadden" and id=150"
    say("You can't go that way.<BR>
  else
    say("You go down the attic.<BR>"
```

6.3 v nt

It l o o bl th t, n t d of u n l uln comm nd th t t t u m thod, ou ould h to h m thod t t d t ticul tim .

6. Attribut

Th t bl ' ttribut ' com in h nd h n t n c n to dd cl lu

6.5 ow it work

7 Logs, Error od s a d ggl g I fo

.1 Introduction

Th ntl mud ls ll mon cod nd ctlon ln numb n of fil ln n t d t il. Th com ln qult h nd h n d bu ln c nt ln nobl m .

Error Co e

- ql mon cod
- comb t mon cod
- fil lo mon cod
  - mon.t t, cont ln ql mon cod
  - bl fil , cont ln ll u n ln ut n n n t d b ll u n chnonlc ll
  - fil mon.lo , cont ln ll out ut fnom th comb t t m

pp dix a l scriptio

iion t bl cont inin d cri tion of cl l ction th t r llo d in om noom

n er t bl cont inin ll th di r nt n r b bot on qu tion k d

b ni ble t bl cont inin ho l b nn d, h , b hom, for ho lon t hich tim , tc.

bogn _ifie i ble thi l n tn n t bl th t l cum ntl b in u d t m on n t bl for th cl nin u of con in th m . (l o th cri t m ql_h lin

boili ble t bl cont inin th bot , t co l d niodic ll to th tm _u nt bl

illyn e ti ble cont in ill n m b d l n u in ord r to root out b d lo onld in nt rin th m

Eill

Appendix [illegible] Field Descriptions

Interface table

gold amount of gold coins on c m in (default: 0)

silver amount of silver coins on c m in (default: 0)

copper amount of copper coins on c m in (default: 2)

room roomnumber on t in in t the moment (default:

lok

lastlogin last time command was issued

birth first time logon

god god mode, 0=normal player, 1=god, 2=non-killable bot, 3=killable bot (default 0)

gmail

giServerSoftware environment variable

giServerName environment variable

giGatewayInterface environment variable

giServerProtocol environment variable

giServerPort environment variable

giRequestMethod environment variable

giPathInfo environment variable

giPathTranslated environment variable

giScriptName environment variable

giRemoteHost environment variable

giRemoteAddr environment variable

giAuthType environment variable

giRemoteUser environment variable

giRemoteIdent environment variable

giContentType environment variable

gi e environment variable

giUserAgent environment variable

jn n in ncn on m c h n h n (d f ult

jn o ein ncn on mo m nt h n h n (d f ult

jn i l ncn on d m h n h n (d f ult

kill

nu ber th d number of th kill (conn ction ith killt bl

n e

[illegible] re e [illegible]ncr [illegible] mount of d[illegible] don b fi ht[illegible]n b o [illegible]on

[illegible] re e [illegible]ncr d[illegible] t nc [illegible] b o [illegible]on (h[illegible] h [illegible]-t[illegible]

o(b) (y) 5 (y) 5e e[illegible]e e

eight mount of i ht in "unit ".

room contains the room number. When the room is not 0, '[illegible]'-command and '[illegible]'-command and all other output commands are directed to person in that room.

Attribute

name a name for the attribute, it is perfectly possible to have a lot of

10 Appendix Database Structure

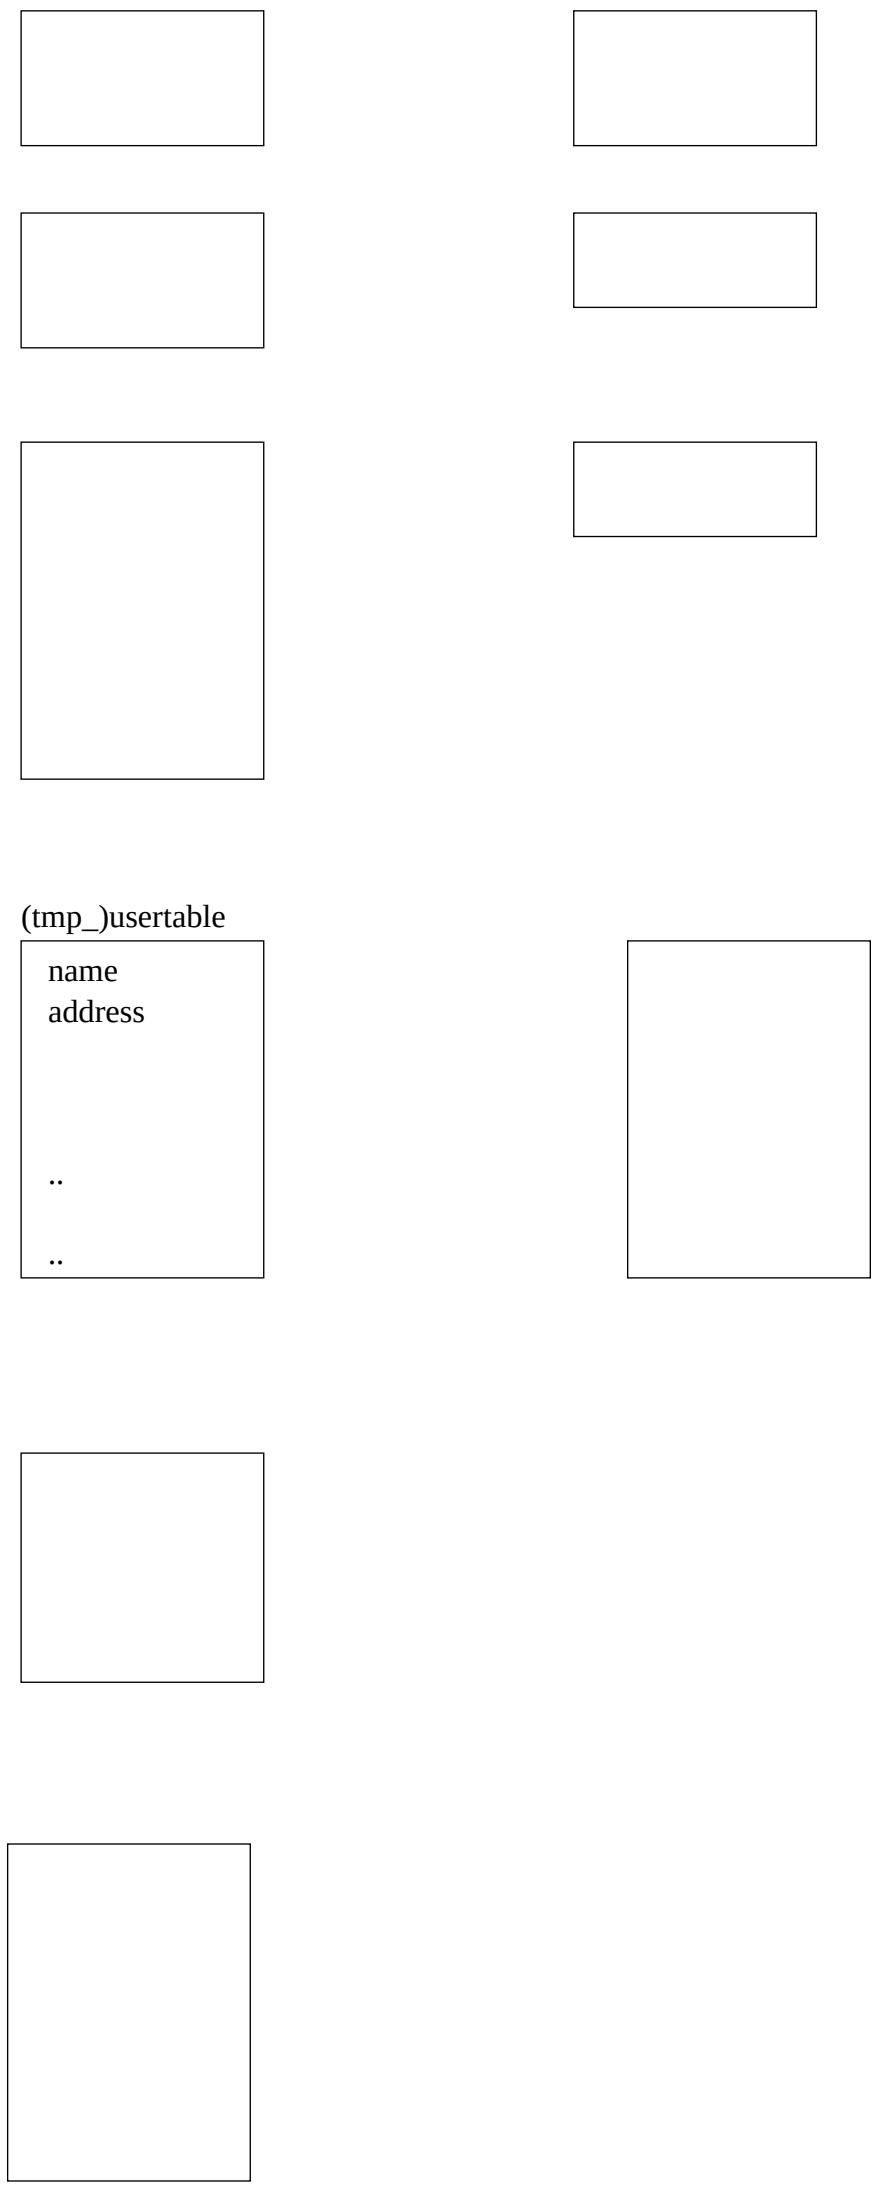
(tmp_)usertable
name
address
..
..

11 pp dix olls alysis

[illegible] t "[illegible] in" t nt d.
"[illegible] in" t nt " t nt Q[illegible]".

1 pp dix F Li s to isit

FSF Free Software Foundation, a foundation established by Richard [illegible].