Servicios en Red 4.1 Apache

Manuel Acosta

Índice

1) Instalación de apache..... 2
2) Configuración de un módulo.....3
3) Virtualhost por nombre:.....6
4) Virtualhost por puerto y privado:.....7

1) Instalación de apache

En la máquina secundaria instalo apache:

```
root@secundario:/home/usuario# sudo apt install apache2 -y
```

Veo desde el navegador del host si funciona la pagina por defecto de apache y lo hace:

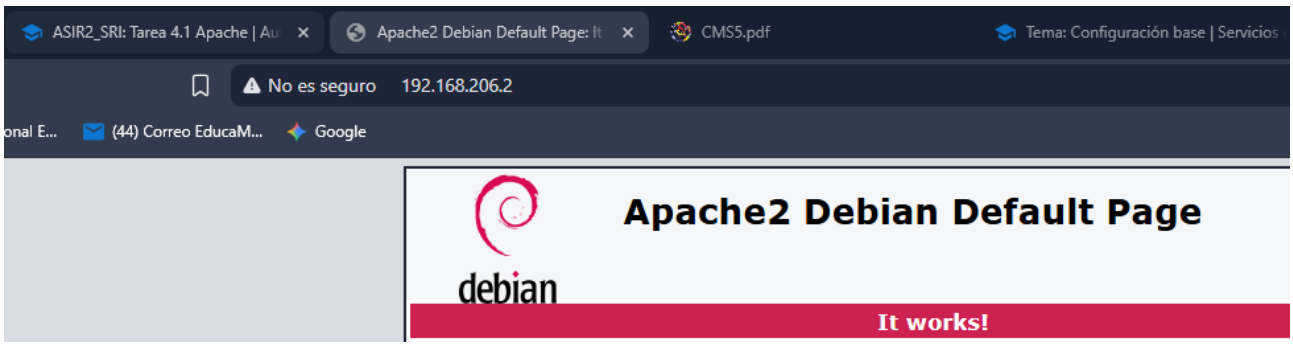

El fichero de configuración de Virtual Host:

```
root@secundario:/etc/apache2/sites-available# ls
000-default.conf  default-ssl.conf
```

El del puerto 80 es el 000-default.conf y el 443 es el default-ssl.conf:

```
<VirtualHost *:80>
        # The ServerName directive sets the request scheme, hostname and port that
        # the server uses to identify itself. This is used when creating
        # redirection URLs. In the context of virtual hosts, the ServerName
        # specifies what hostname must appear in the request's Host: header to
        # match this virtual host. For the default virtual host (this file) this
        # value is not decisive as it is used as a last resort host regardless.
        # However, you must set it for any further virtual host explicitly.
        #ServerName www.example.com

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/html

        # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
        # error, crit, alert, emerg.
        # It is also possible to configure the loglevel for particular
        # modules, e.g.
        #LogLevel info ssl:warn

        ErrorLog ${APACHE_LOG_DIR}/error.log
        CustomLog ${APACHE_LOG_DIR}/access.log combined

        # For most configuration files from conf-available/, which are
        # enabled or disabled at a global level, it is possible to
        # include a line for only one particular virtual host. For example the
        # following line enables the CGI configuration for this host only
        # after it has been globally disabled with "a2disconf".
        #Include conf-available/serve-cgi-bin.conf
</VirtualHost>
```

2) Configuración de un módulo

Instalo php y el modulo que integra PHP con Apache:

```
root@secundario:/etc/apache2/sites-available# sudo apt install php libapache2-mod-php
```

Me descargo el template y lo descomprimo:

```
root@secundario:/tmp# wget https://github.com/ffuentese/quiz-php/archive/refs/heads/master.zip
 -O quiz-php.zip
```

Lo muevo a /var/www/html:

```
root@secundario:/tmp# sudo cp -r quiz-php-master/* /var/www/html/
```

Para cambiar el servername voy a 000-default.conf y agrego:

```
ServerName quiz.manuel.org
```

He añadido esto a mi archivo de configuración DNS:

```
; Añadir Registros para los Virtual Hosts
quiz        IN      A       192.168.206.2
shop        IN      A       192.168.206.2
```

Para ver con Indexes en 000-default.conf (hay que quitar todos los archivos que se llamen index.):

```
ServerAdmin webmaster@localhost
DocumentRoot /var/www/html
<Directory /var/www/html/>
        Options Indexes FollowSymLinks
        AllowOverride None
        Require all granted
</Directory>
```

Accedo al Quiz:

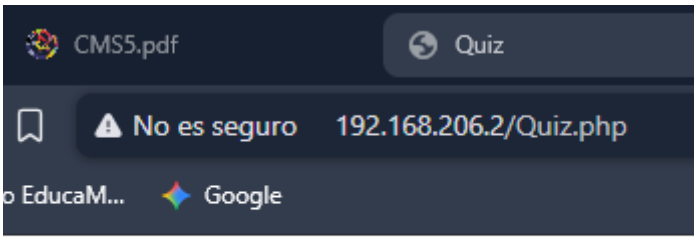

Quiz

Para añadir preguntas:

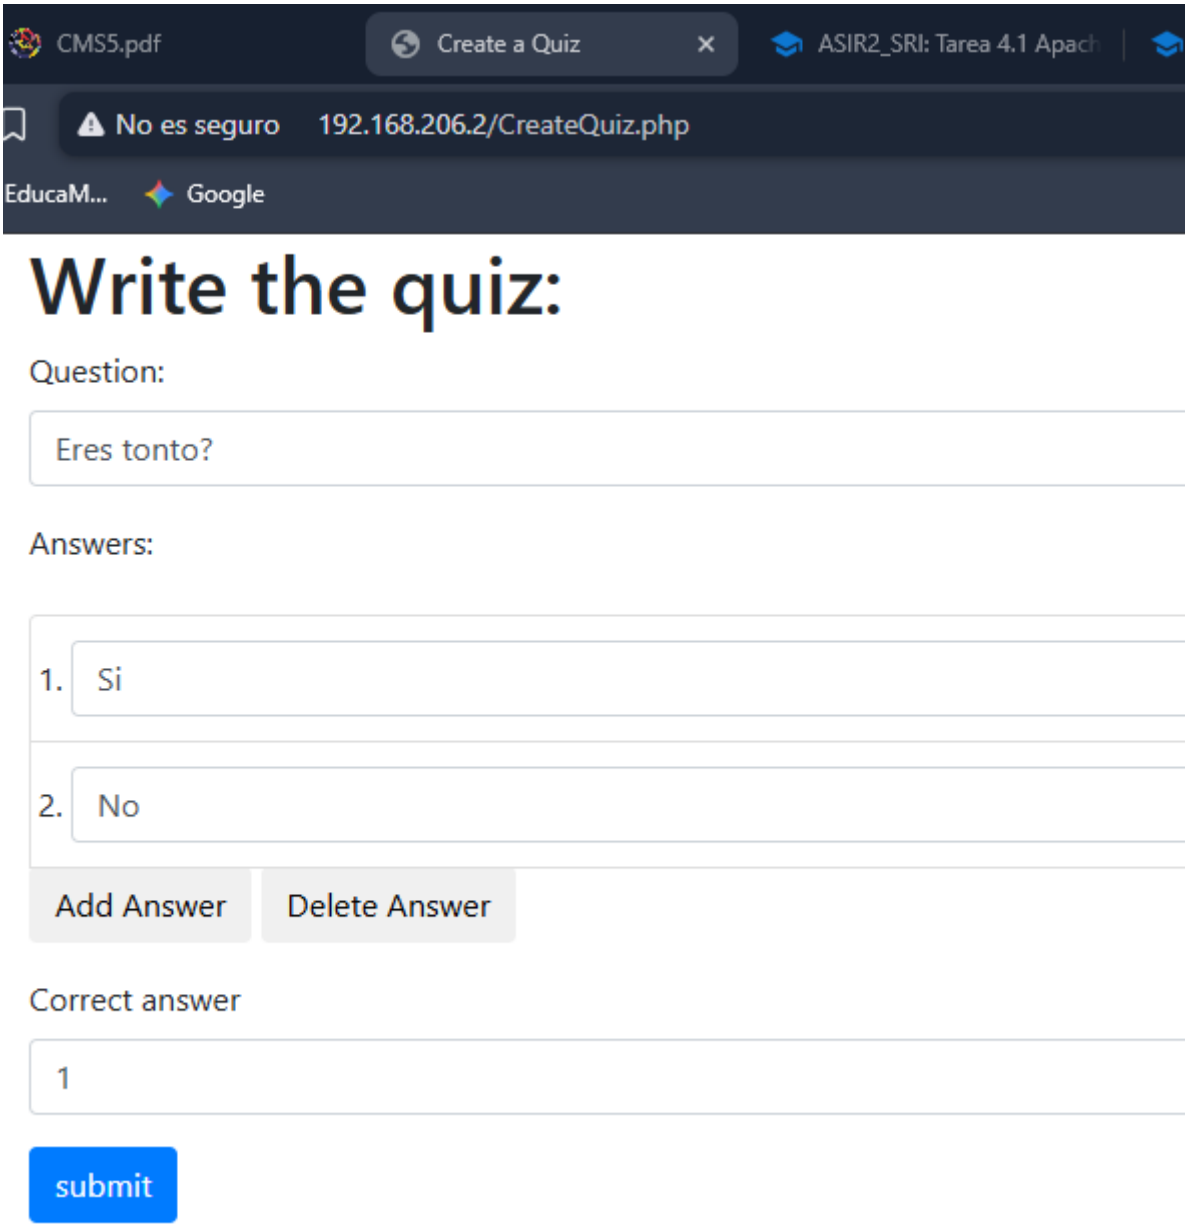

Muestra el acceso a través de http://ip_del_servidor y de http://quiz.tudominio/quiz.ph

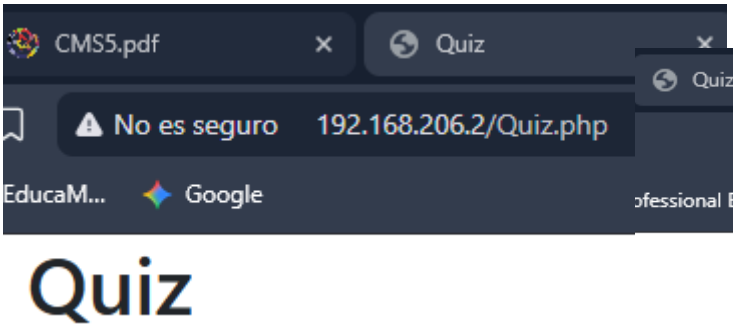

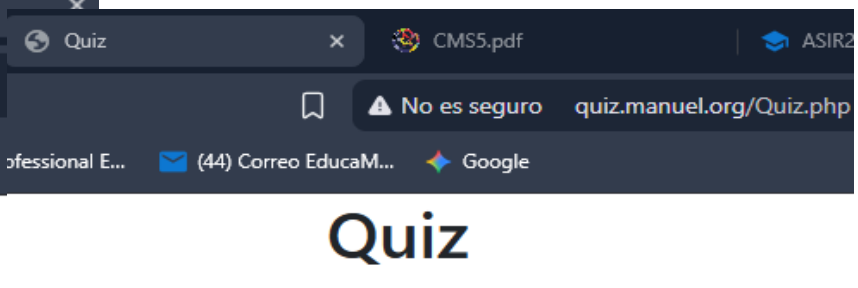

3) Virtualhost por nombre:

Creo un fichero en etc/apache2/sites-avaible:

```
  GNU nano 7.2                /etc/apache2/sites-available/001-default.conf
<VirtualHost *:80>
        # The ServerName directive sets the request scheme, hostname and po
        # the server uses to identify itself. This is used when creating
        # redirection URLs. In the context of virtual hosts, the ServerName
        # specifies what hostname must appear in the request's Host: header
        # match this virtual host. For the default virtual host (this file)
        # value is not decisive as it is used as a last resort host regardl
        # However, you must set it for any further virtual host explicitly.
        ServerName shop.manuel.org

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/html/mitienda
```

Creo el directorio:

```
root@secundario:/var/www/html# mkdir /var/www/html/mitienda
```

Descargo el template y lo llevo a mi tienda, y descomprimo:

```
root@secundario:/var/www/html/mitienda# ls
startbootstrap-shop-homepage-master.zip
root@secundario:/var/www/html/mitienda# unzip startbootstrap-shop-homepage-master.zip
```

Para establecer DirectoryIndex en dist/index.html:

```
  GNU nano 7.2                /etc/apache2/sites-available/001-default.conf
<VirtualHost *:80>
        # The ServerName directive sets the request scheme, hostname and po
        # the server uses to identify itself. This is used when creating
        # redirection URLs. In the context of virtual hosts, the ServerName
        # specifies what hostname must appear in the request's Host: header
        # match this virtual host. For the default virtual host (this file)
        # value is not decisive as it is used as a last resort host regardl
        # However, you must set it for any further virtual host explicitly.
        ServerName shop.manuel.org

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/html/mitienda
        DirectoryIndex /dist/index.html
```

Hay que habilitar la configuración con sudo a2ensite desde sites-available

Funciona la pagina apache:

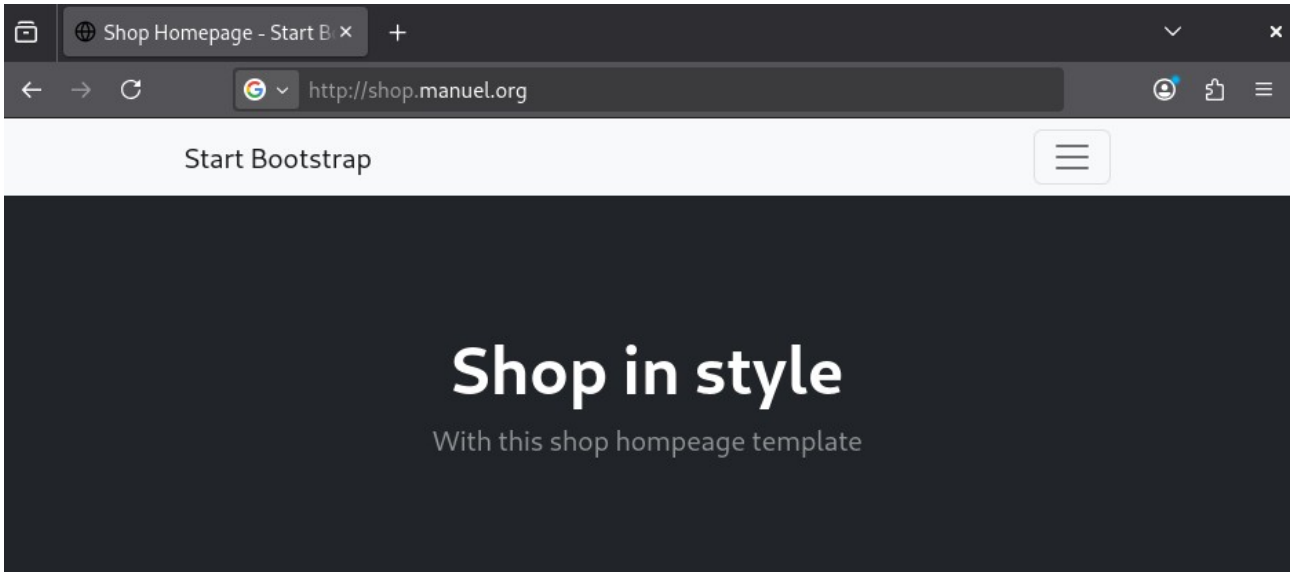

4) Virtualhost por puerto y privado:

Da de alta en el dns el dominio shop.tudominio:

```
shop          IN      A       192.168.206.2
```

Funciona en el puerto 80 ya que lo puse en el 001-default.conf y puedo acceder desde shop.manuel.org o desde la IP desde el host:

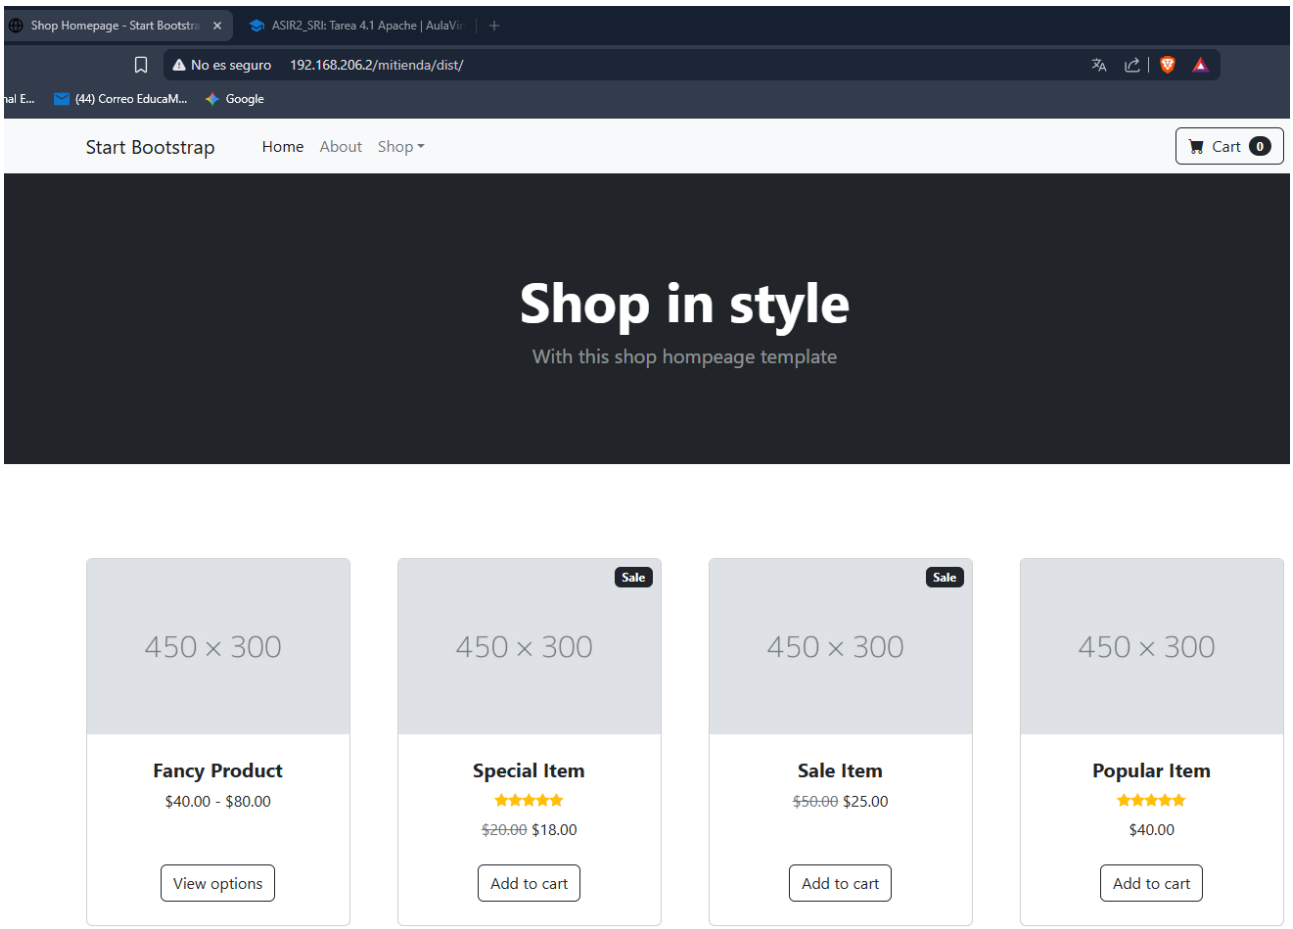

Para que utilice el puerto 8080

Creo el directorio:

```
root@secundario:/var/www# sudo mkdir /var/www/admin
root@secundario:/var/www# sudo chown -R www-data:www-data /var/www/admin
root@secundario:/var/www# sudo chmod -R 755 /var/www/admin
```

Descargo el template y lo extraigo con unzip en la ruta de admin:

```
root@secundario:/var/www/admin# wget https://github.com/stisla/stisla/archive/refs/
heads/master.zip
```

Genera otro fichero de configuración de apache:

```
  GNU nano 7.2                          shop.manuel.org_8080.conf
<VirtualHost *:8080>
    ServerAdmin webmaster@manuel.org
    ServerName shop.manuel.org:8080
    DocumentRoot /var/www/html/admin
    DirectoryIndex src/pages/index.html

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined

    <Directory /var/www/html/admin/>
        Options Indexes FollowSymLinks
        AllowOverride None
        Require ip 192.168.206.3

    </Directory>

    ErrorDocument 403 /error_403.html

</VirtualHost>
```

Modifica el servername para que coincida con el dominio, he puesto que sea shop.manuel.org:8080.

Para habilita el puerto en el virtualhost para que trabaje en el puerto 8080:

```
  GNU nano 7.2                      /etc/apache2/ports.conf
# If you just change the port or add more ports here, y
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 80
Listen 8080
```

Para que solo acceda el cliente (192.168.206.3):

```
<Directory /var/www/admin>
    Options Indexes FollowSymLinks
    AllowOverride None
    Require ip 192.168.206.3

</Directory>
```

Para que configure la página en caso de error:

```
    </Directory>

    ErrorDocument 403 /error_403.html

</VirtualHost>
```

Tengo que crear un html en la ruta de /var/www/admin:

```
  GNU nano 7.2                          error_403.html
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Error 403 - Acceso Denegado</title>
    <style>
        h1 {
            color: #d9534f;
            font-size: 4em;
            margin-bottom: 0.1em;
        }
    </style>
</head>
<body>
    <div>
        <h1>ERROR 403 LO SENTIMOS - SHOP.MANUEL.ORG</h1>
    </div>
</body>
</html>
```

Hay que habilitar el sitio web:

```
root@secundario:/etc/apache2/sites-available# sudo a2ensite shop.manuel.org_8080.conf
Enabling site shop.manuel.org_8080.
To activate the new configuration, you need to run:
  systemctl reload apache2
root@secundario:/etc/apache2/sites-available# systemctl reload apache2
```

Ahora si accedo desde mi host (192.168.0.8) no carga sale nuestra página de error 403:



ERROR 403 LO SENTIMOS - SHOP.MANUEL.ORG

Desde la maquina cliente (192.168.206.3):

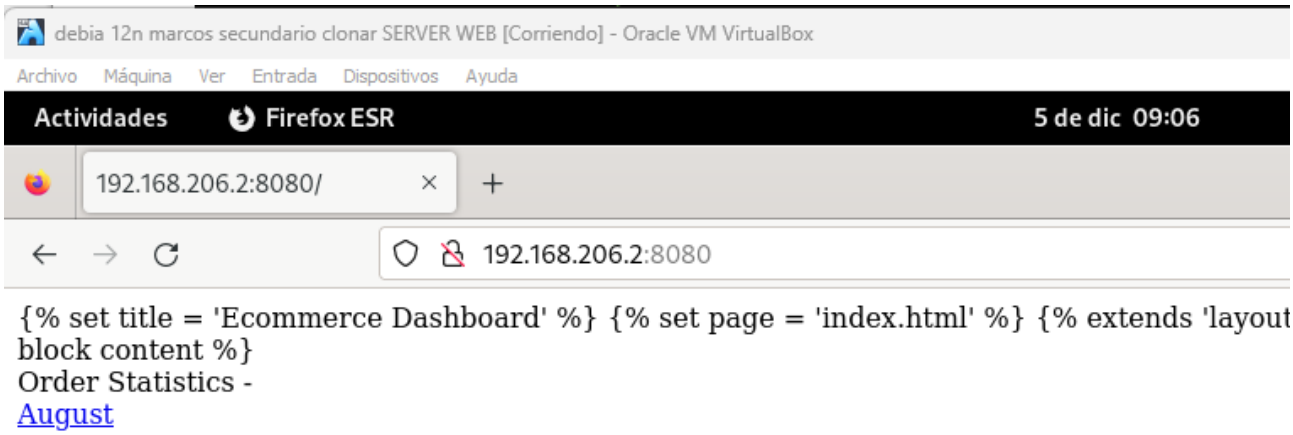

{% set title = 'Ecommerce Dashboard' %} {% set page = 'index.html' %} {% extends 'layout
block content %}
Order Statistics -
August