Servicios en Red 4.2 Https y Estadísticas

Manuel Acosta

Índice

1) Configuración ssl.....3
2) Estadísticas.....7

1) Configuración SSL

Creamos el directorio:

```
mkdir /var/www/landing
```

Deposito los archivos del template dentro:

```
root@secundario:/var/www/landing# ls
main.zip  Simple-Landing-Page-main
root@secundario:/var/www/landing# cp Simple-Landing-Page-main/* /var/www/landing/
cp: -r not specified; omitting directory 'Simple-Landing-Page-main/assets'
root@secundario:/var/www/landing# cp -r Simple-Landing-Page-main/* /var/www/landing/
root@secundario:/var/www/landing# ls
assets  index.html  LICENSE  main.zip  README.md  Simple-Landing-Page-main
```

Cambio el dominio de la página desde /etc/bind:

```
; Añadir Registros para los Virtual Hosts
landing        IN      A       192.168.206.2
```

```
  GNU nano 7.2                                  resolv.conf
# Generated by NetworkManager
nameserver 192.168.206.1
```

Para utilizar el certificado:

```
root@secundario:/etc# sudo a2enmod ssl
Considering dependency setenvif for ssl:
Module setenvif already enabled
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Enabling module socache_shmcb.
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create self-signed
 certificates.
To activate the new configuration, you need to run:
  systemctl restart apache2
root@secundario:/etc# systemctl restart apache2
```

(Activa el MOD _SSL)

```
root@secundario:/etc# systemctl restart apache2
root@secundario:/etc# sudo openssl req -x509 -nodes -days 365 -newkey rsa:2048 -keyout
 /etc/ssl/private/apache-selfsigned.key -out /etc/ssl/certs/apache-selfsigned.crt
```

(Crear el certificado SSL)

```
  GNU nano 7.2        /etc/apache2/sites-available/soporte.clockwork.local.conf
<VirtualHost *:80>
    ServerName landing.manuel.org
    # ServerAlias www.soporte.clockwork.local
    # DocumentRoot /var/www/soporte.clockwork.local
    Redirect / https://landing.manuel.org/
</VirtualHost>
<VirtualHost *:443>
    SSLEngine on
    SSLCertificateFile /etc/ssl/certs/apache-selfsigned.crt
    SSLCertificateKeyFile /etc/ssl/private/apache-selfsigned.key

    ServerAdmin soporte@clockworkcomputer.local
    ServerName landing.manuel.org
    ServerAlias www.landing.manuel.org
    DocumentRoot /var/www/landing
    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
</VirtualHost>
```

(Configurar Apache para que use SSL y redirija del 80 al 443)

```
root@secundario:/etc/apache2/sites-available# sudo a2ensite soporte.clockwork.local.conf
Enabling site soporte.clockwork.local.
To activate the new configuration, you need to run:
  systemctl reload apache2
```

(Subimos la configuración)

```
root@secundario:/etc/apache2/sites-available# sudo apache2ctl configtest
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using
 192.168.206.2. Set the 'ServerName' directive globally to suppress this message
Syntax OK
```

(Ver si hay errores)

```
root@secundario:/etc/apache2/sites-available# sudo a2dissite default-ssl.conf
```

(Hay que deshabilitar las otras configuraciones con sudo a2dissite)

Ahora si entramos a nuestra página sale un certificado:

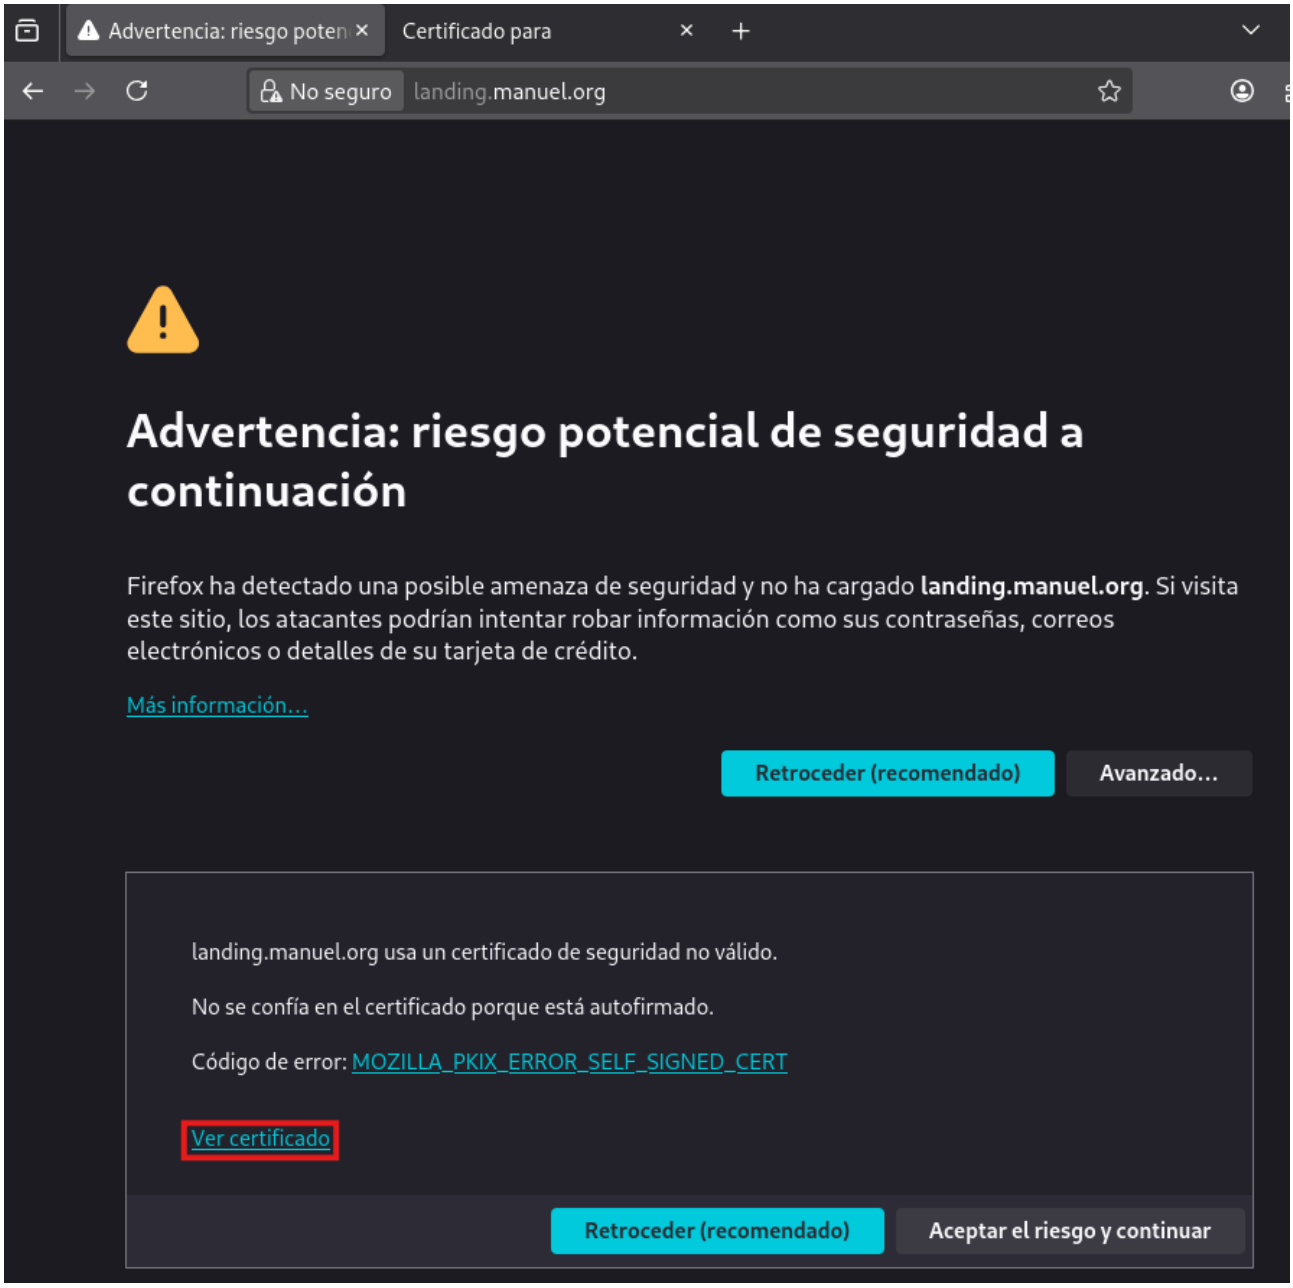

(Los datos que salen son los que te piden al crear el certificado y que he puesto yo)

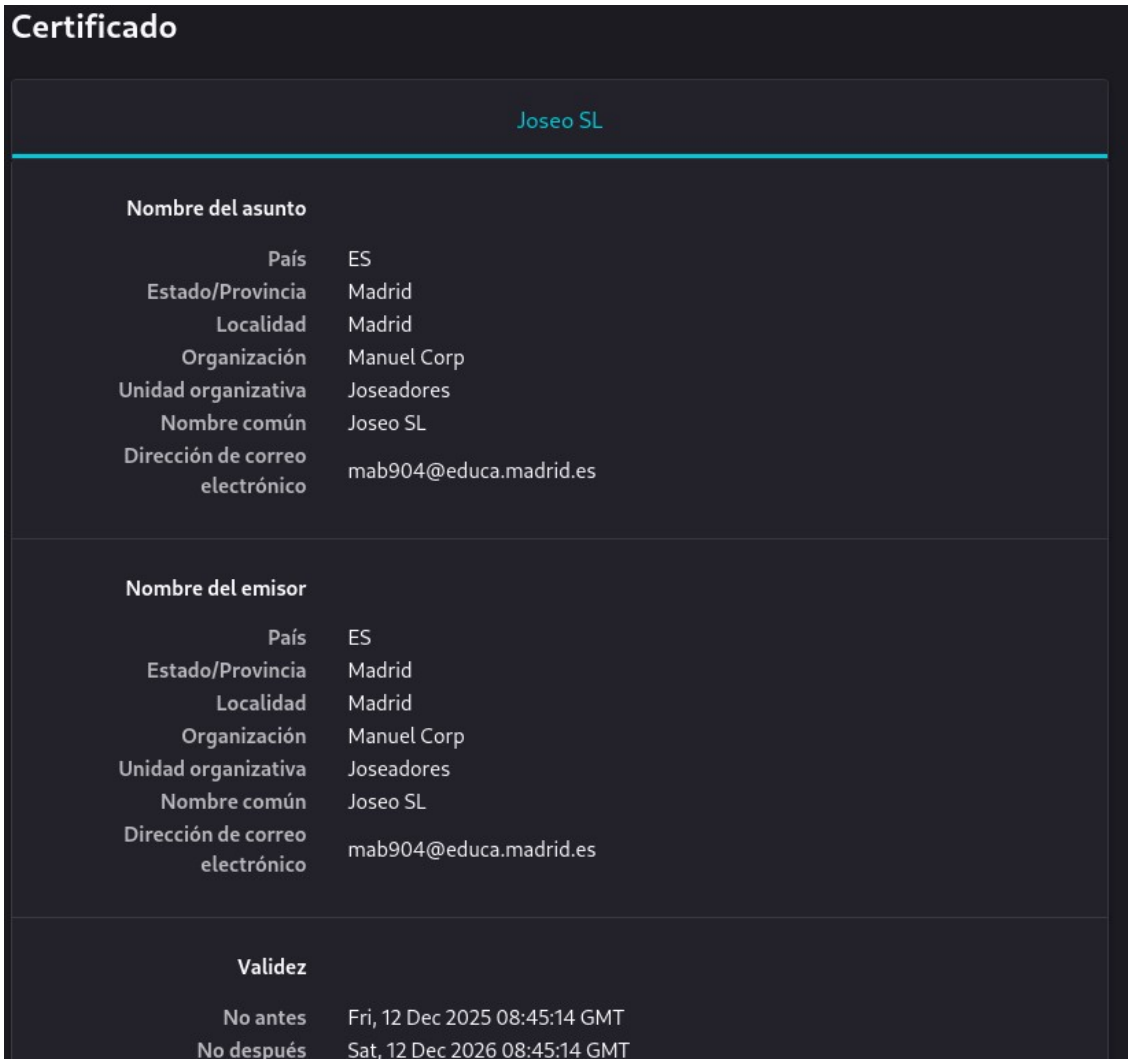

La página al aceptar el certificado (pone que no es seguro porque el navegador confía en la conexión HTTPS solo si el certificado es validado por una Autoridad Certificadora):

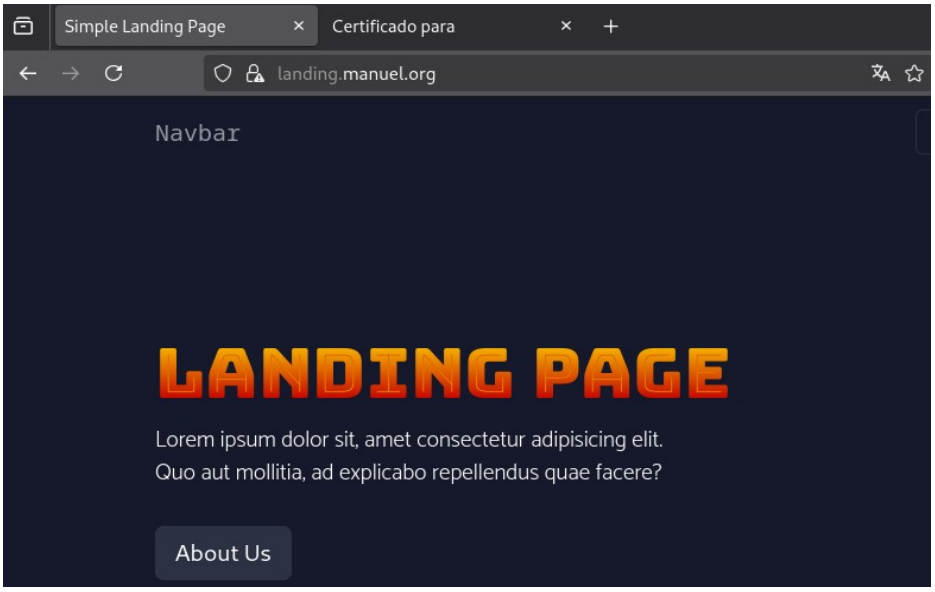

2) Estadísticas

Creo el subdirectorio:

```
sudo mkdir /var/www/landing/server-status
```

Miro si tengo el módulo que tiene las estadísticas:

```
root@secundario:/etc/apache2/sites-available# ls /etc/apache2/mods-enabled/status*
/etc/apache2/mods-enabled/status.conf  /etc/apache2/mods-enabled/status.load
root@secundario:/etc/apache2/sites-available# sudo a2enmod status
Module status already enabled
```

Archivo de configuración para poder ver las estadísticas desde una IP determinada:

```
  GNU nano 7.2                  /etc/apache2/mods-enabled/status.conf *
# Allow server status reports generated by mod_status,
# with the URL of http://servername/server-status
# Uncomment and change the "192.0.2.0/24" to allow access from other host

<Location /server-status>
        SetHandler server-status
        Require local
        Require ip 192.168.206.2/24
</Location>
```

Reiniciamos:

```
sudo systemctl restart apache2
```

Y ahora si vamos a la dirección http://landing.manuel.org/server-status nos salen las estadísticas y puedo ver qué está haciendo el servidor en este momento, los clientes conectados, la carga de la CPU, el tiempo que lleva encendido y qué archivos específicos están solicitando los usuarios en tiempo real.

Apache Status

landing.manuel.org/server-status/

Apache Server Status for landing.manuel.org (via 192.168.206.2)

Server Version: Apache/2.4.65 (Debian) OpenSSL/3.0.17
Server MPM: prefork
Server Built: 2025-07-29T20:18:46

Current Time: Tuesday, 16-Dec-2025 10:11:45 CET
Restart Time: Tuesday, 16-Dec-2025 10:10:50 CET
Parent Server Config. Generation: 1
Parent Server MPM Generation: 0
Server uptime: 54 seconds
Server load: 0.26 0.18 0.16
Total accesses: 2 - Total Traffic: 5 kB - Total Duration: 1
CPU Usage: u.01 s.01 cu0 cs0 - .037% CPU load
.037 requests/sec - 94 B/second - 2560 B/request - .5 ms/request
2 requests currently being processed, 0 workers gracefully restarting, 3 idle workers

```
KW___.......................................................
............................................................
......................
```

Scoreboard Key:
"_" Waiting for Connection, "s" Starting up, "R" Reading Request,
"W" Sending Reply, "K" Keepalive (read), "D" DNS Lookup,
"C" Closing connection, "L" Logging, "G" Gracefully finishing,
"I" Idle cleanup of worker, "." Open slot with no current process

Srv	PID	Acc	M	CPU	SS	Req	Dur	Conn	Child	Slot	Client	Protocol	VHost	Request
0-0	13416	1/1/1	**K**	0.00	0	0	0	0.9	0.00	0.00	192.168.206.2	http/1.1	landing.manuel.org:80	GET /server-status HTTP/1.1
1-0	13417	1/1/1	**W**	0.00	0	0	0	4.7	0.00	0.00	192.168.206.2	http/1.1	landing.manuel.org:443	GET /server-status/ HTTP/1.1

Srv	Child Server number - generation
PID	OS process ID
Acc	Number of accesses this connection / this child / this slot
M	Mode of operation
CPU	CPU usage, number of seconds
SS	Seconds since beginning of most recent request
Req	Milliseconds required to process most recent request
Dur	Sum of milliseconds required to process all requests
Conn	Kilobytes transferred this connection
Child	Megabytes transferred this child
Slot	Total megabytes transferred this slot

SSL/TLS Session Cache Status:
cache type: **SHMCB**, shared memory: **512000** bytes, current entries: **2**
subcaches: **32**, indexes per subcache: **88**
time left on oldest entries' objects: avg: **299** seconds, (range: 299...299)
index usage: **0%**, cache usage: **0%**
total entries stored since starting: **2**
total entries replaced since starting: **0**
total entries expired since starting: **0**
total (pre-expiry) entries scrolled out of the cache: **0**
total retrieves since starting: **0** hit, **0** miss
total removes since starting: **0** hit, **0** miss

Apache/2.4.65 (Debian) Server at landing.manuel.org Port 443