Keep the evidence.
Bound the work.
Verify the commitment.

Omega Hive × ASI

Private cognition, explicit delivery closure and verified chain commitments

THROUGH M4 · C1–C4 + CHAIN

HIVE · DETTA · PLN · F1R3

Architecture and evidence • 16 October 2026 • supported local scope

ELI16: remember, weigh evidence, do the calculation

Think of a student investigating a question with a notebook, evidence ledger and calculator.

C1 · NOTEBOOK

Keep the original story

Record what happened and where each report came from. Keep contrary observations; replay does not add another event.

C2 · EVIDENCE LEDGER

Know what supports a belief

A copy is still the same source. A conclusion keeps its parents; it does not become a fresh observation.

PLN · CALCULATOR

Apply a guarded formula

Use the existing pinned mathematics on exact inputs. C2 checks and saves the result; the calculator owns no beliefs.

What this gives us

An inspectable trail from original observations to admitted conclusions.

A repeated message, a new conclusion and an independent observation mean different things.

ELI16: a priority list and a limited attempt budget

There are two prepared questions, but time for only one calculation. Which should run first?

C3 · Priority list

Give each eligible task an integer score. Rank it, decay it explicitly, and remember feedback once.

C4 · Work coordinator

Choose from that list. Save the attempt reservation before calculation, then track admission and feedback.

Restart · Same budget

Reopening the notebook does not refill the budget. Recover a saved decision; do not credit it twice.

Observed in real Hive

One native action, one admitted conclusion, one feedback credit; restart and replay tested.

The deliberate tradeoff

A crash can spend the last attempt without producing a conclusion. The receipt says so.

Priority is not truth. A bounded step finishing is not a promise that a conclusion was found.

ELI16: finishing the job and settling its receipts

A notebook entry, a calculation and a reward can finish at different times.

C1 + RELAY

The report was processed

The notebook gets a delivery receipt even when a report cannot change a number. Contrary evidence stays in the story.

C3 · ATTENTION

The reward has one outcome

Ask the priority-list owner: already credited, retired without credit, or still pending. A lost reply never earns a second reward.

C4 + HIVE

The receipt tells both stories

Show the original work result and the later cleanup progress separately. Cleanup does not buy another attempt.

Observed

33 observations drained; 20 new process-kill cases; no new formula calls during reconciliation.

M3.1 settles recorded effects. It does not extend the deadline, change the past or start new thinking.

ELI16: approve a fingerprint, then check the receipt

Imagine signing a sealed envelope containing the fingerprint of one shareable result.

1 · APPROVE

Name the exact result

Hive finishes a generated task. The operator approves that result, its destination and who may sign it.

2 · SAVE, THEN SEND

Keep the same envelope

Save the signed request before sending. After a crash, retry those same bytes; a lost reply does not mean a new request.

3 · VERIFY

Read what was stored

Check the fingerprint in the block’s resulting state and the matching deployment’s finalized effect. Repeat after restart.

Private notebooks stay private

Only the approved generated workflow is eligible. Episodes, beliefs and their identifying hashes stay off-chain.

A stored fingerprint identifies the approved result. It does not establish that the reasoning is true.

Fifteen modules; four responsibility groups

A module owns a responsibility. It need not be a separate process or repository.

CLIENT / COGNITION

- Episodic memory
- Belief revision
- PLN · one rule
- STI attention
- Inference control

APPLICATION PORTS

- AtomStorage
- Relations · future
- Search projection · future
- Agent messaging
- Delegated execution

CONTROL & POLICY

- Registry
- Compatibility resolver
- Authorization

Local test policy
and static descriptors

PROVIDER ADAPTERS

DA storage

Real local DeTTa

Consensus / finality

Real isolated
F1R3node · M4

SPECIFIED / FUTURE

IMPLEMENTED LOCAL

REAL PROVIDER

One grounded rule; no ECAN or LTI

Data responsibilities: bytes → references → history

Persistence, identity, structure, discovery and provenance have different owners.

MODULE	FUNCTION / PRIMARY OPERATIONS	OWNED STATE / STATUS
DA storage	Persist opaque bytes put · get · availability	Payloads + shares REAL LOCAL PROVIDER
AtomStorage	Scoped immutable envelopes create · get · getMany · availability	Reference + replay metadata IMPLEMENTED
Relations	Represent ordered structural roles assertRelation · getRelation	Immutable relation records SPECIFIED
Search projection	Find refs at a known watermark query	Rebuildable index SPECIFIED
Episodic memory C1	Record / append / read ordered events pendingEvidence · trusted completion	Private history + delivery intents IMPLEMENTED · M3.1

DA persists bytes. Only the application owners interpret events, claims or beliefs.

Cognitive responsibilities: four separate roles

Attention, belief admission, pure mathematics and work coordination remain separate.

MODULE	FUNCTION / PRIMARY OPERATIONS	OWNED STATE / BOUNDARY
Belief revision C2	submitEvidence · readBelief submitDerivation · readDerivation	Supports, snapshots, attempts Only C2 commits belief changes
PLN kernel	Apply one grounded rule to exact premises profiles · applyRule	No mutable domain state Pure native proposal
Attention C3	select · advance · submitStimulus submitFeedback · resolveFeedback	STI, clock, causal receipts / retirement No cognition dependency
Inference control C4	Run one immutable workset step · readProgress · reconcile	Selection, budgets, closure progress No truth or attention ownership

C4 calls C2 for admission. C2 invokes the kernel, then checks authority and commits its decision.


Control responsibilities: move work, preserve authority

The remaining six modules connect owners and report specific facts.

MODULE	FUNCTION / PRIMARY OPERATIONS	OWNED STATE / STATUS
Messaging	Accept, deliver, acknowledge send · poll · ack	Inbox + deduplication · IMPLEMENTED
Execution	Run one named operation submit · status · result	Jobs + completion outbox · IMPLEMENTED
Registry	Describe configured providers descriptors	Static configuration · IMPLEMENTED
Resolver	Match required semantics resolve	No mutable state · IMPLEMENTED
Consensus / finality	Submit approved commitment; observe submit · observe	Signed intents + observations · REAL M4
Authorization	Check current caller + scope + method authorize / live policy checks	Operator policy · LOCAL FIXTURE

Function dependencies: the exercised M3.1 path

Arrows point from caller to provider; the relay and every state owner commit separately.

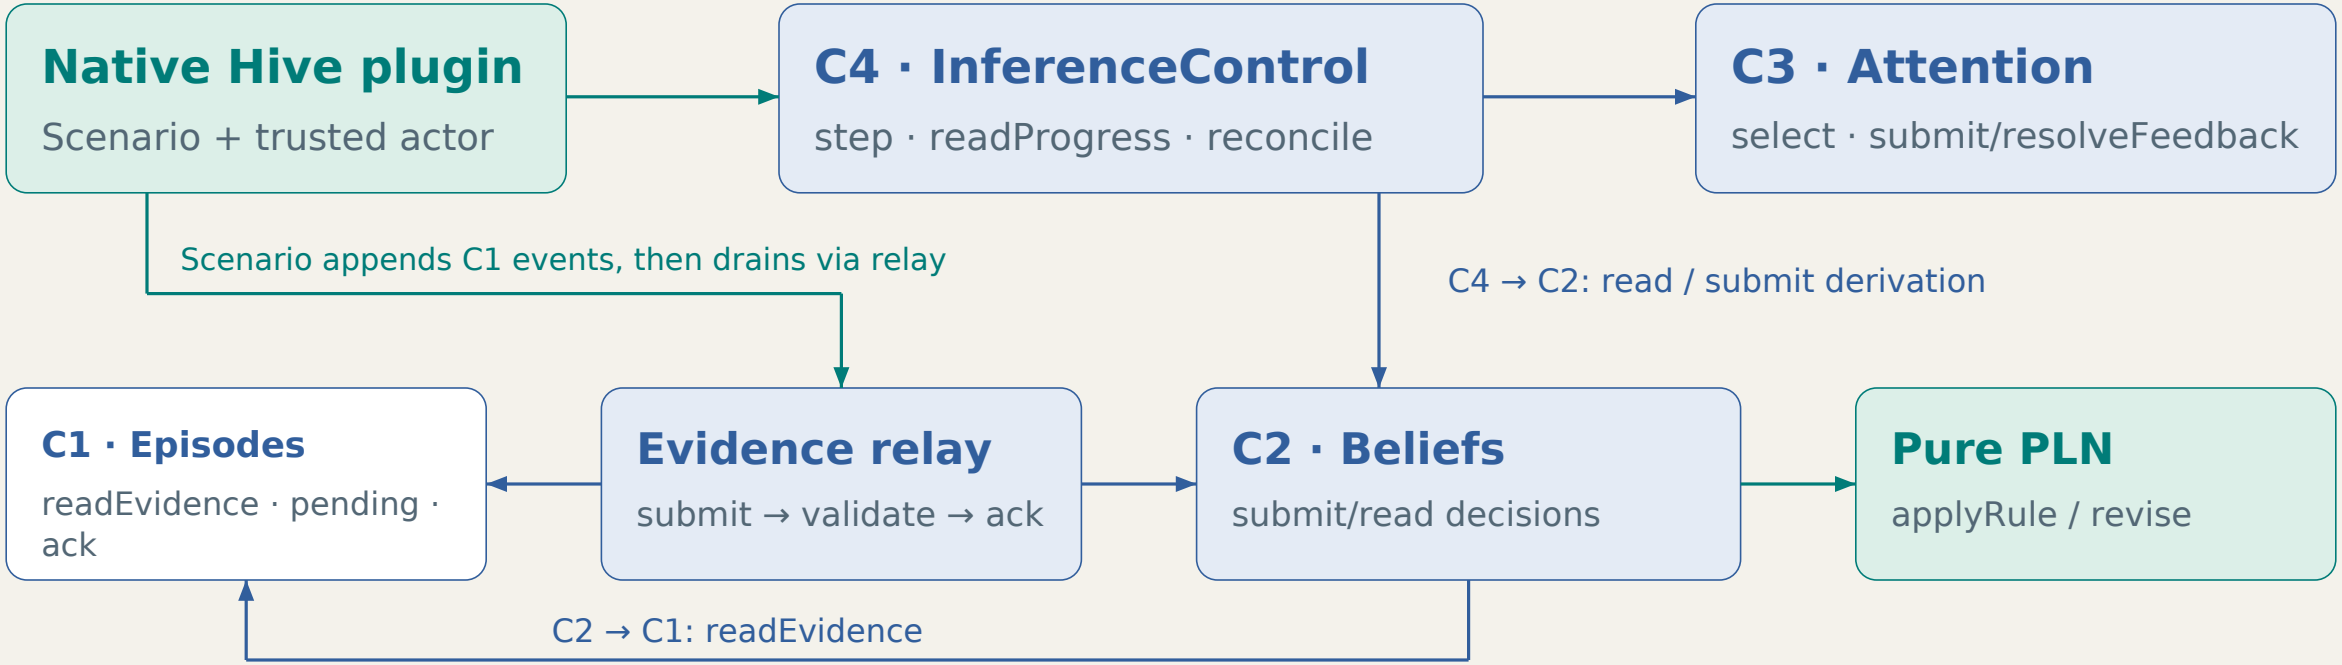

C1 / C2 / C4 → private AtomStorage → real DeTTa


Opaque bytes below the application boundary; each owner keeps its own journal.

Authority + descriptors

Checked at every owner port

Function dependencies: the preserved M1.2 path


Solid arrows = exercised calls. Every provider effect crosses an existing validated interface.

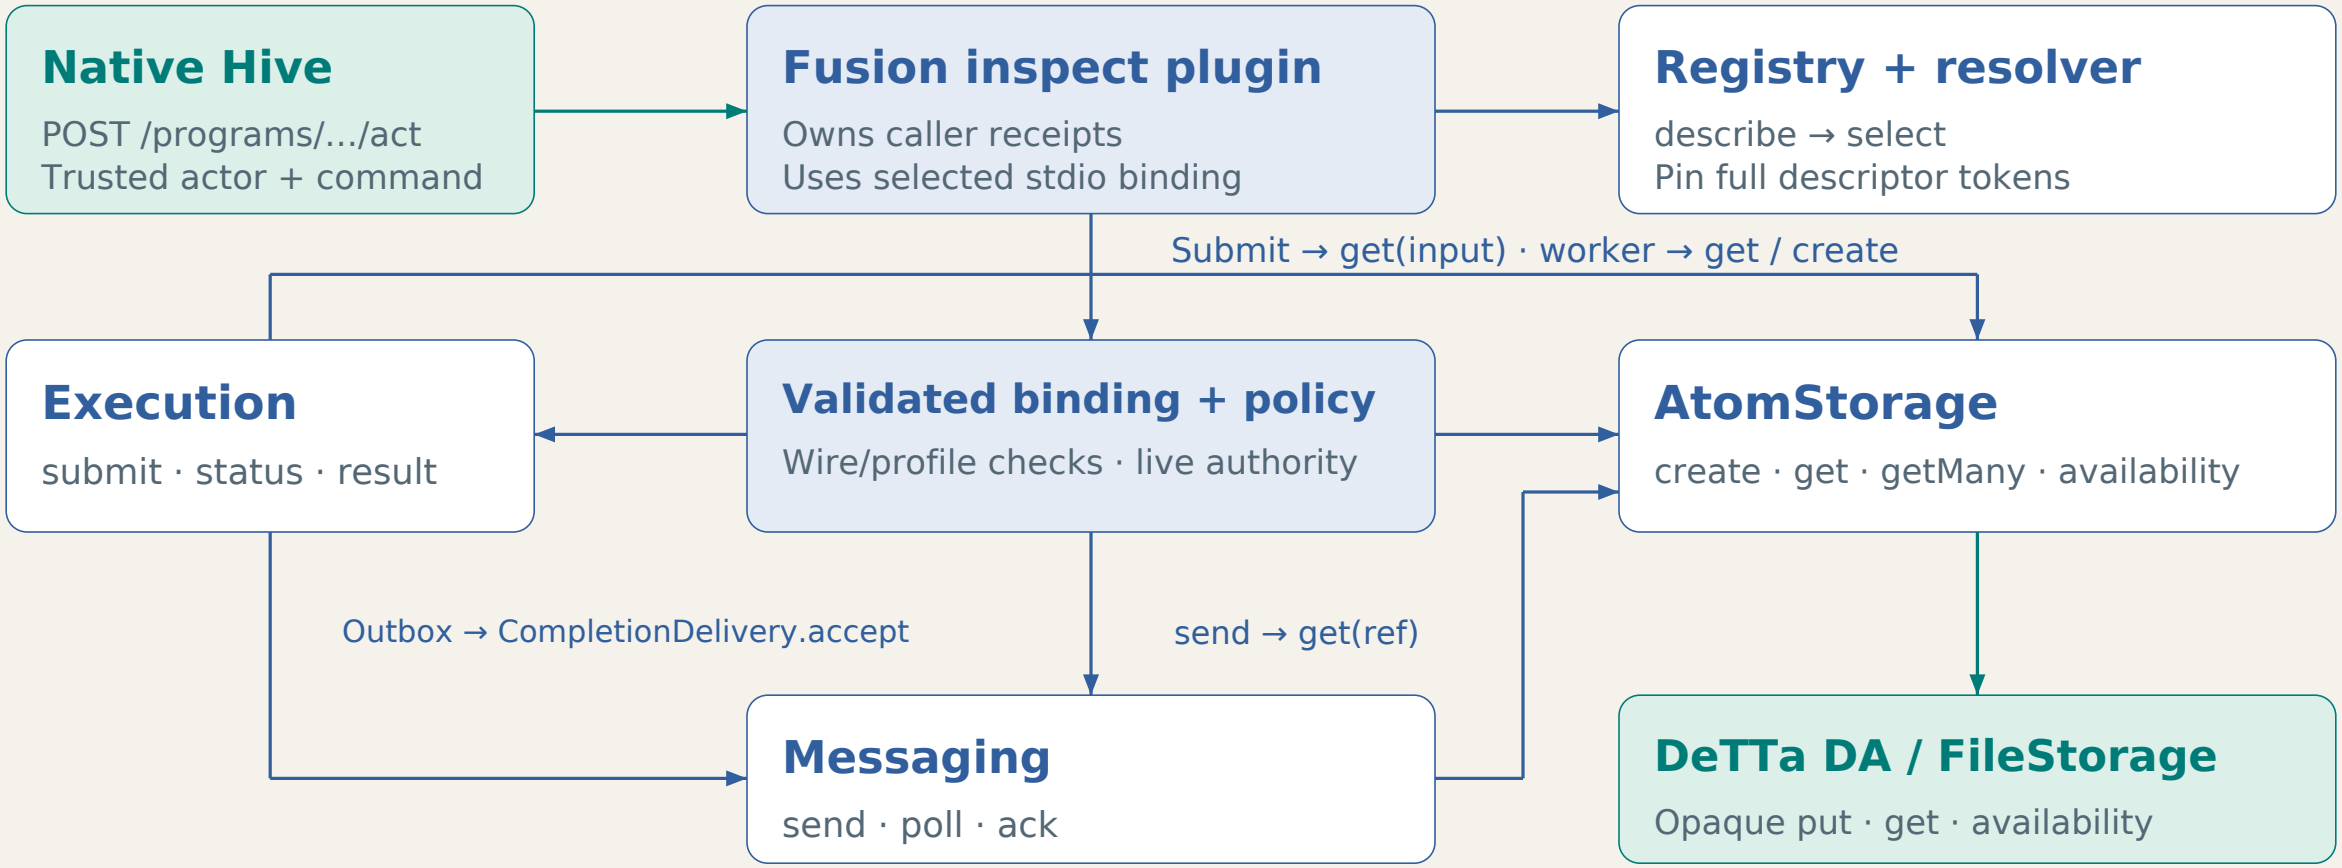

M4 adds a separate commitment caller after acceptance; this original inspect path stays unchanged.

Function dependencies: an approved result reaches finality

A native sibling consumes the completed inspect result; private cognition has no chain dependency.

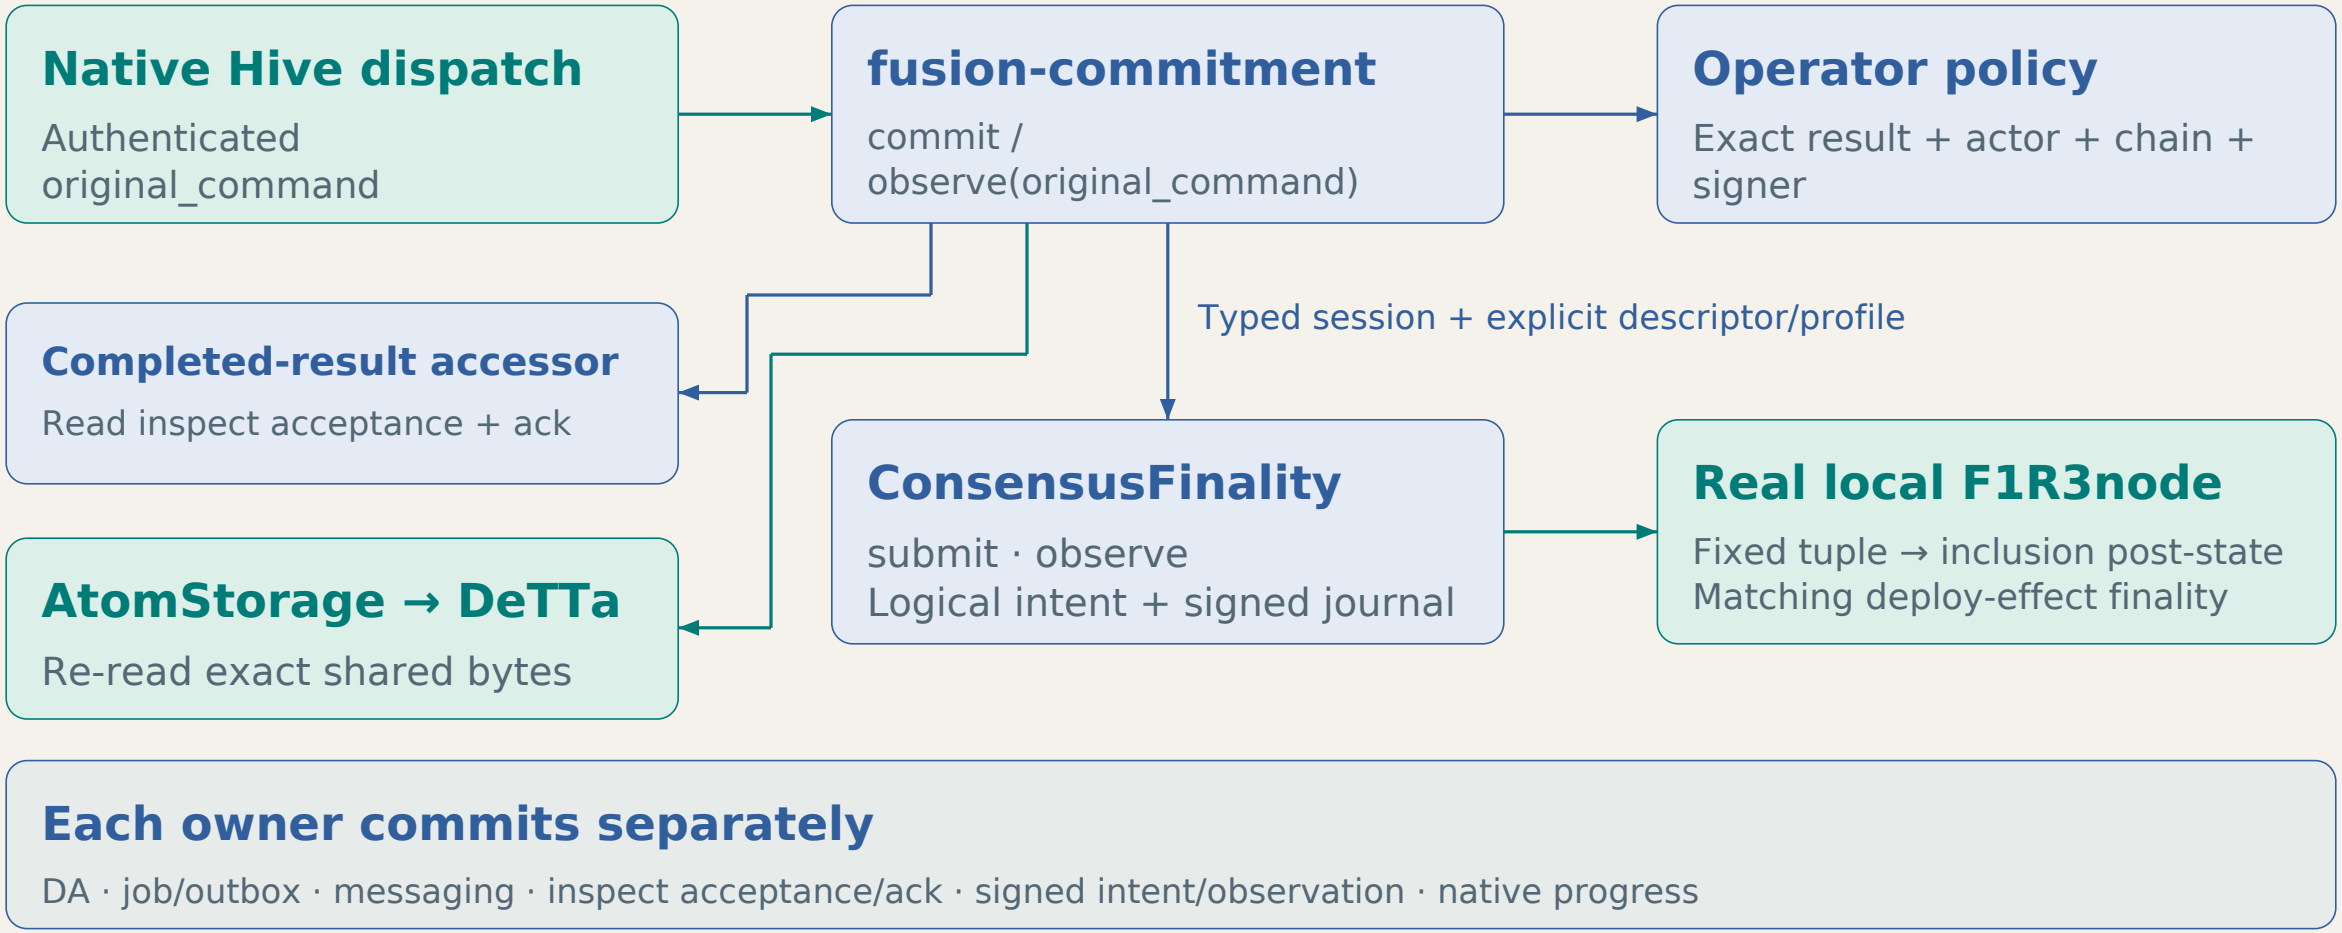

The DA boundary remains application-neutral

The external adapter translates application references into generic coordinates and opaque bytes.

Application contracts

Scope · references · replay identity

→

External adapter

Opaque payload + generic coordinate

→

DeTTa core

DA encoding + FileStorage

4 data shares + 2 parity shares

S1	S2	S3	S4	S5	S6
present	present	present	present	removed	removed

Observed reconstruction

Cached payload + two shares removed: exact bytes recovered. A third missing share is unavailable.

The DA core does not interpret Hive identities, truth values, attention balances or job state.

Two independent substitutions, one design principle

Select semantics and capabilities explicitly; keep callers independent of provider internals.

AtomStorage · preserved M1/M2

Real local DeTTa or an independent atomic-file fixture.

In-process and private stdio bindings pass the same workflow.

Attention · new in M3

SQLite owner or an independent atomic-file fixture.

Same STI policy, tasks and budgets; unchanged consumer produces matching outcomes.

No shared owner transitions, inheritance or private-table access in the attention replacement.

These are fresh-store replacements. Existing accepted state is not migrated.

Private state has explicit owners and placement

A trusted Hive actor maps to an operator-configured private scope and credential.

PRIVATE LOCAL COMPOSITION

C1 · Episodes

History + delivery intents

C2 · Beliefs

Supports + exact attempts

C3 · Attention

STI + clock + causal replay

C4 · Controller

Budgets + progress + feedback

Public Hive receipt

Generated counters, status and public command receipt ID.

Private trace

Task/support hashes, premises, lineage, attention and payloads stay private.

Shared M1 wire and DA contracts stay unchanged; every owner rechecks current authorization.

Executable contracts make the inference step finite

The supported task is explicit, immutable and grounded before the controller starts.

CONTRACT	WHAT IS FIXED	WHY IT MATTERS
Context + task	Private context; exact role references	Labels cannot merge distinct identities
Workset	1–16 unique immutable tasks	No search or automatic task expansion
Premise snapshot	Claim / context / revision / support ID	No silent substitution with latest state
Derived support	Closed tag + inherited roots / ancestry	No fresh observation or evidence count
Work budget	Candidates, attempts, generation, deadline	Restart cannot silently refill the allowance

Profile mismatch, malformed response or changed semantic intent fails explicitly.

C1: one occurrence, one position in the story

Immutable event atoms sit behind a stable episode identity and a committed sequence.

EpisodeRef = scope + ID

1 · Report

No numerical claim

2 · Assessment

Explicit strength / confidence

3 · Copy

Inherits original roots

4 · Contrary

Kept in the history

Same occurrence + same body

Return the original receipt, even under a new request key. The head does not advance.

Same occurrence + changed meaning

Conflict on body or provenance changes. Distinct real occurrences may share identical bytes.

C1 commits event + evidence intent together; AtomStorage has already committed independently.

C1 delivery closes without understanding PLN

Completion attests durable processing. Belief support and numerical truth remain C2 responsibilities.

C1 event
Event + delivery intent

C2 decision
Full selected-profile result

Relay decision
Validate + save completion

C1 acknowledgment
Exact identity + live consumer

Relay acknowledgment
Save progress; recover replies

33 events · one persistent episode

Append 16 → drain to 0
Append 16 → drain to 0
Append 1 → drain to 0

Acknowledgment is model-independent

The trusted relay checks C2's full decision. C1 checks its event, delivery, request and selected consumer; it parses no PLN snapshot.

16 pending deliveries is still the bound. Draining frees pending capacity; episode lifetime stays 256 events.

C2: admitting evidence and changing belief are separate

New observations remain visible even when they cannot change the current aggregate.

Evidence submission

C1 evidence reference or an existing C2 support; exact claim and context.

Admission decision

ADMITTED or DUPLICATE
Track occurrence and provenance.

Numerical decision

Initialize, revise, no change, retain alternative, or model-inapplicable.

Aggregate with exact coverage

Every numerical result names the contributing leaves, origins, premises, formula and assumption.


Unaggregated alternatives

Copied or contrary observations remain in the snapshot. Later eligible assumptions can combine existing supports.

One saved truth value is not a summary of every observation. Read its coverage and alternatives.

A derived conclusion inherits its evidence trail

The result is a new support record, while its original observations and ancestry remain the same.

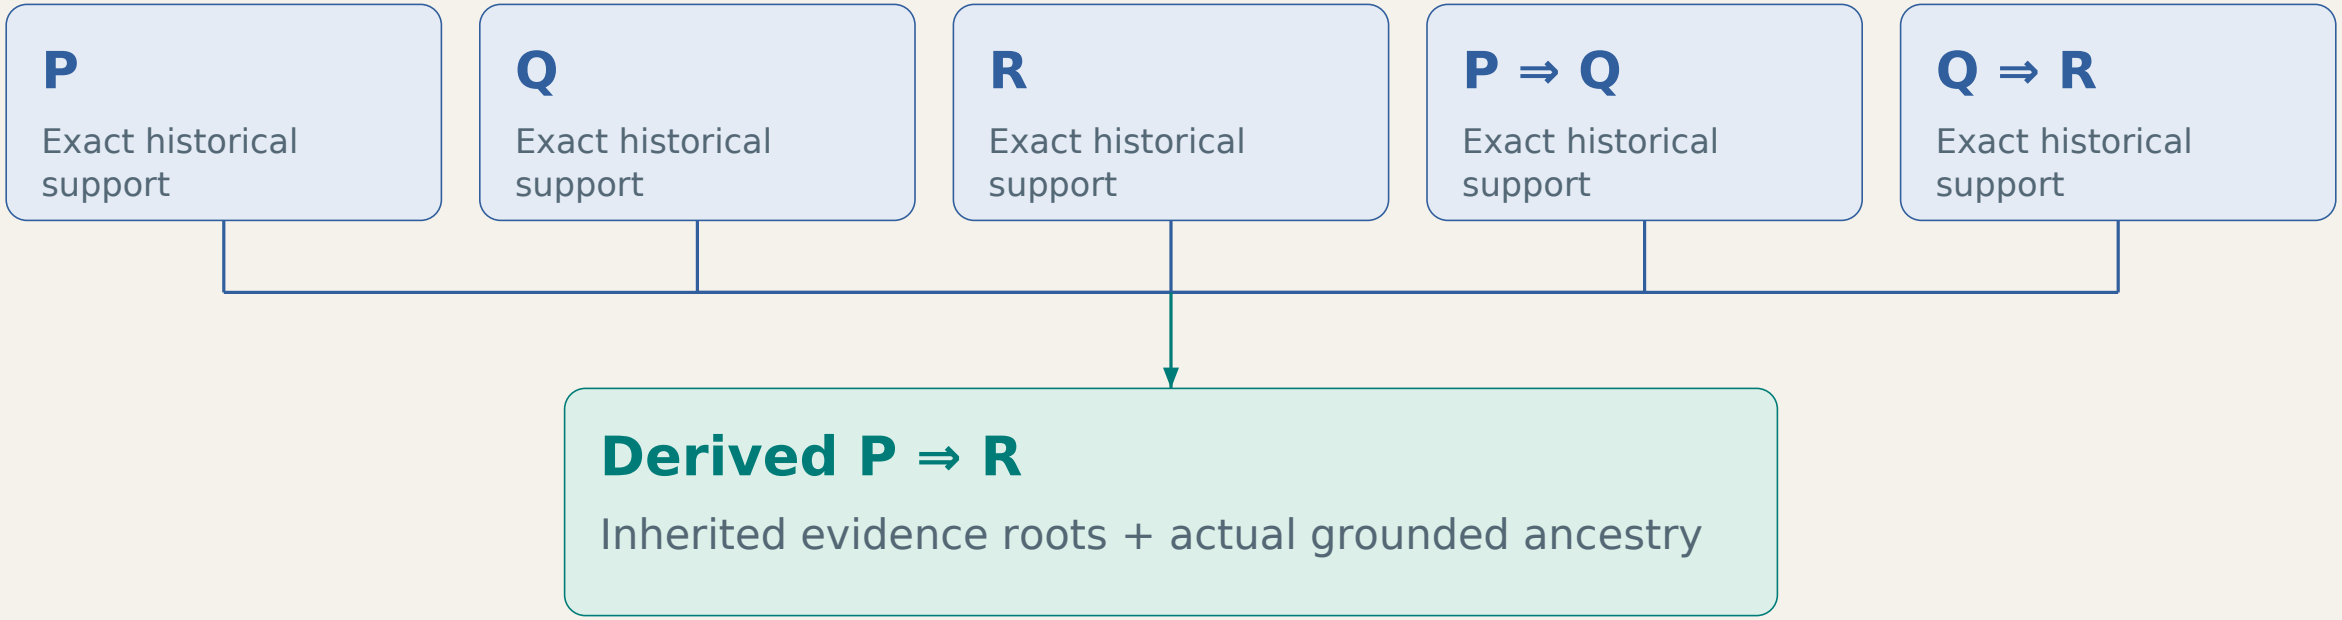

Unknown target: initialize inferential support. Existing truth: keep the alternative.

No new observation, root, independence assertion or evidence count is created.

One grounded rule reuses the actual native PLN

No replacement arithmetic and no general search loop: five explicit premises produce one proposal.

Fusion PLNKernel

Exact bindings, source/profile checks and remaining deadline

→

Pinned Reachability

PLNAdapter.apply_rule
DeductionRule + guards

→

Native PLN / PeTTa

Truth_Deduction
SWI 10.1.14 + Janus

Two probability checks

Upstream exact Python precheck and the native consistency guard both apply.

Separate compatibility profile

Deduction has its own source/runtime allowlist; the revision-only profile stays intact.

Kernel output is a proposal. C2 performs final authorization, CAS and admission.

Native goldens check deduction and preserved revision

Independent expected values check pinned native formulas; no replacement math runs in the owners.

M3 · Grounded deduction

P, Q, R = (0.5, 0.8)
P⇒Q, Q⇒R = (0.8, 0.7)

Expected P⇒R: (0.68, 0.3136)

M2 · Guarded revision

(0.75, 0.50) + (0.25, 0.50)
→ (0.50, 2/3)

Unequal confidence 0.50 / 0.75
→ (0.375, 0.80)

`Observed deduction: 0.6800000000000002 / 0.31360000000000005`

Absolute tolerance 1e−12; finite-domain and lineage guards remain active.

These are model-specific heuristics, not calibrated real-world confidence or proven entailment.

C3: a small, independent attention policy

sti-additive-linear-decay/1 · integer STI · explicit logical time · persistent causal identity

Stimulate

Add within per-target saturation. Refuse the whole change if the context budget would be exceeded.

Select

Rank positive eligible targets by descending STI, then the full canonical reference. Reads do not decay state.

Advance

Explicitly decay by logical steps. Stored causal generation survives decay, new ingress and new step IDs.

Default limits: 100 STI per target · 300 per context · decay 1 per logical step

Only authority and opaque-reference syntax are required; no Hive, storage or PLN runtime.

This reference policy is implemented. ECAN, LTI, diffusion and new attention research are out of scope.

Attention replacement preserves the measured outcome

Recorded M3 comparison: same tasks, evidence, policy and budgets; provider and preference vary.

ATTENTION PROVIDER	PREFER	SELECTION ORDER	STEP TIME
SQLite	B	b → a	0.744361 s
SQLite	A	a → b	0.677157 s
Atomic-file fixture	B	b → a	0.726126 s
Atomic-file fixture	A	a → b	0.641150 s

Every case

1 native call · 1 unique admission · 1 feedback credit

Reopen all owners

Same receipt · zero additional native calls

Four local observations demonstrate substitution and selection effect; they are not a performance ranking.

C4: reserve work durably before invoking the rule

A work budget limits physical evaluation opportunities, even when the process dies.

1 · Freeze selection

Read the immutable workset and exact attention order.

2 · Reserve attempt

Commit candidate progress and a physical attempt slot.

3 · Ask C2

Recover a decision or dispatch the exact derivation attempt.

4 · Reconcile

Save decision and causal feedback acknowledgment.

Budget survives restart

Candidate count, reserved attempts, generation limit and absolute deadline are persisted.


Selection changes next step

Current selection is frozen. A unique admission records one causal feedback intent.

No refund for a lost pending attempt. A new evaluation needs another slot and attempt identity.

C3 alone settles the feedback outcome

C4 asks about the exact recorded intent. Attention serializes application and retirement.

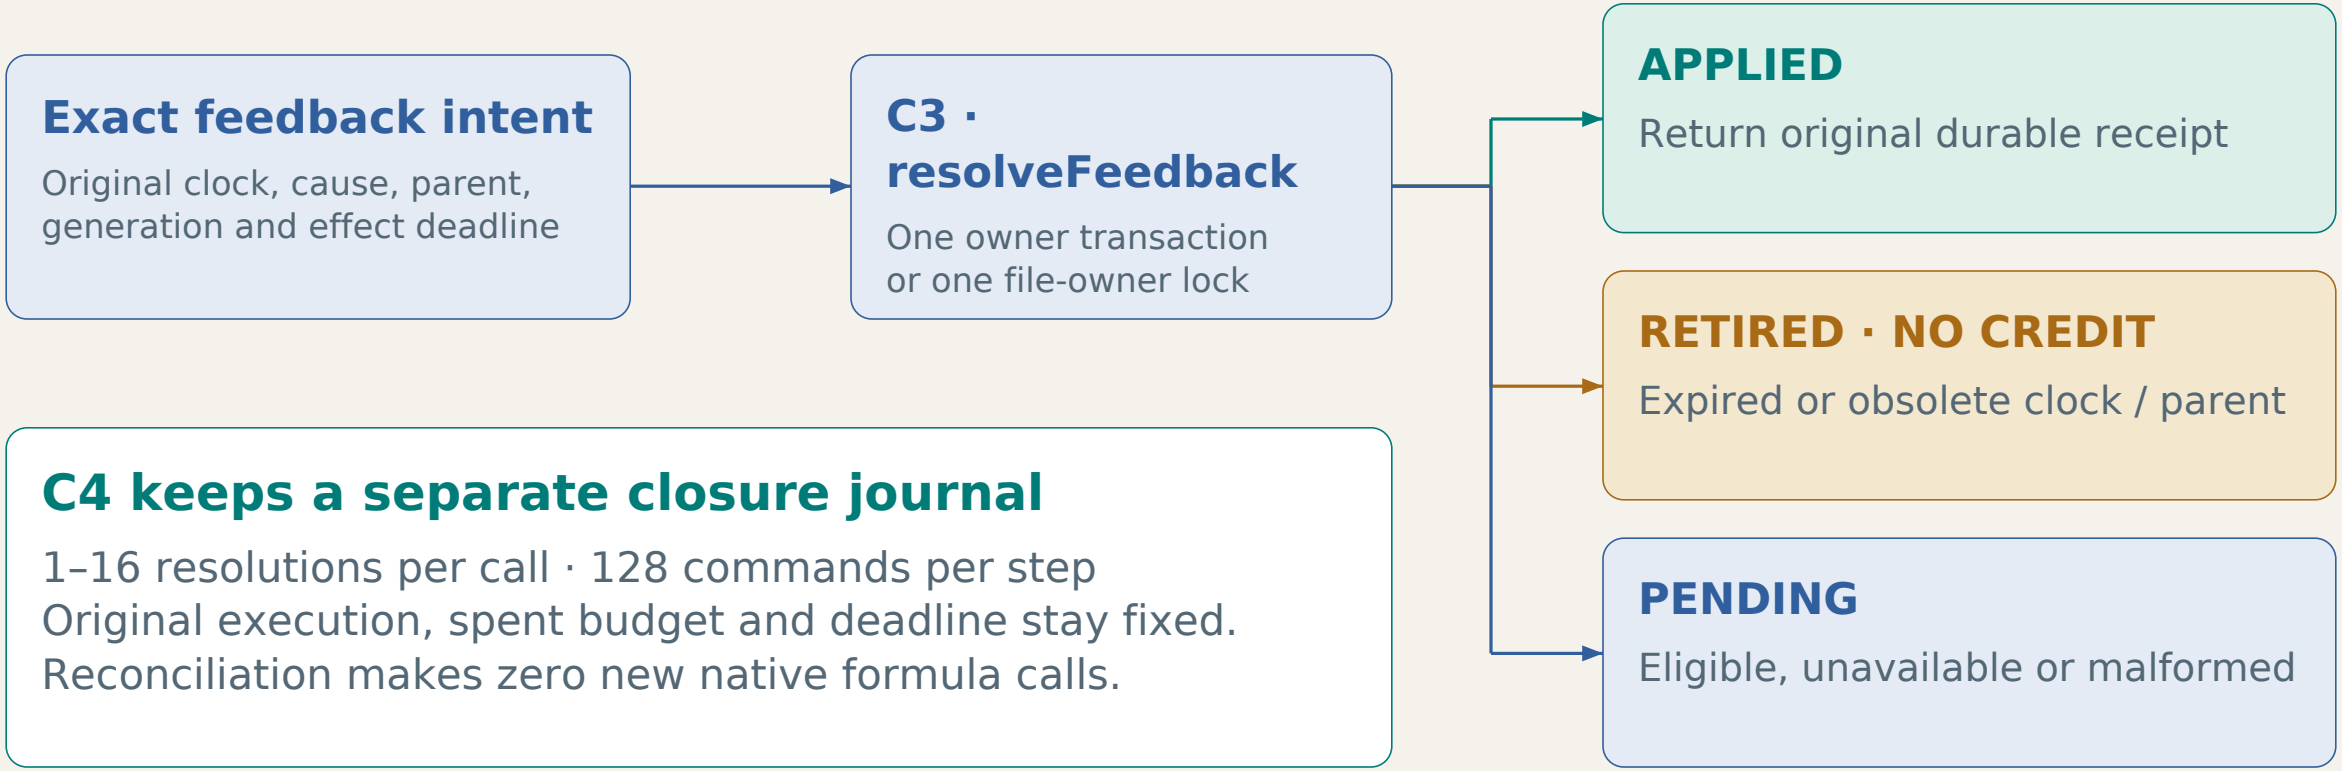

Applied before a lost reply → recover once. Retired first → delayed delivery cannot award credit.

Five crash boundaries, independent owner commits

10 direct boundary cases + 5 actual Hive caller boundary cases in the recorded M3 run.

PROCESS DIES AFTER…	DURABLE FACT	RECOVERY RESULT
Attention stimulus commit	C3 causal receipt	Replay does not add STI again
C4 attempt reservation	Slot already spent	One-slot budget can end without a result
Kernel return; before C2 commit	Pending attempt; no admission	Another evaluation needs another slot
C2 belief commit	Authoritative saved decision	Recover without another native call
C3 feedback commit; before C4 ack	Credit recorded by logical cause	Recover ack without a second credit

The evidence proves tested local process recovery, not a distributed transaction or power-loss durability.

Authorization, replay and profiles remain live

Cached success does not bypass current authority, and compatibility is never silently widened.


TRIGGER	OBSERVED DECISION	PRESERVED BOUNDARY
Same key, altered nested request	CONFLICT / validation refusal	Exact immutable semantic intent
Permission revoked before replay	DENIED	Live authority even for cached receipts
Authority / CAS changes during math	Refuse final admission	C2 rechecks before its own commit
Runtime or response binding changes	Explicit compatibility failure	No weaker fallback or invented result
Clock advances before feedback	Retire without credit via owner	Original clock, parent and generation retained

Attention ingress and feedback have distinct trusted bindings; selection never grants authority.

One real Hive action reaches the entire private path

Existing authenticated Programs runtime → fusion-inference / infer-generated.

```
POST /api/programs/fusion-inference/act
```

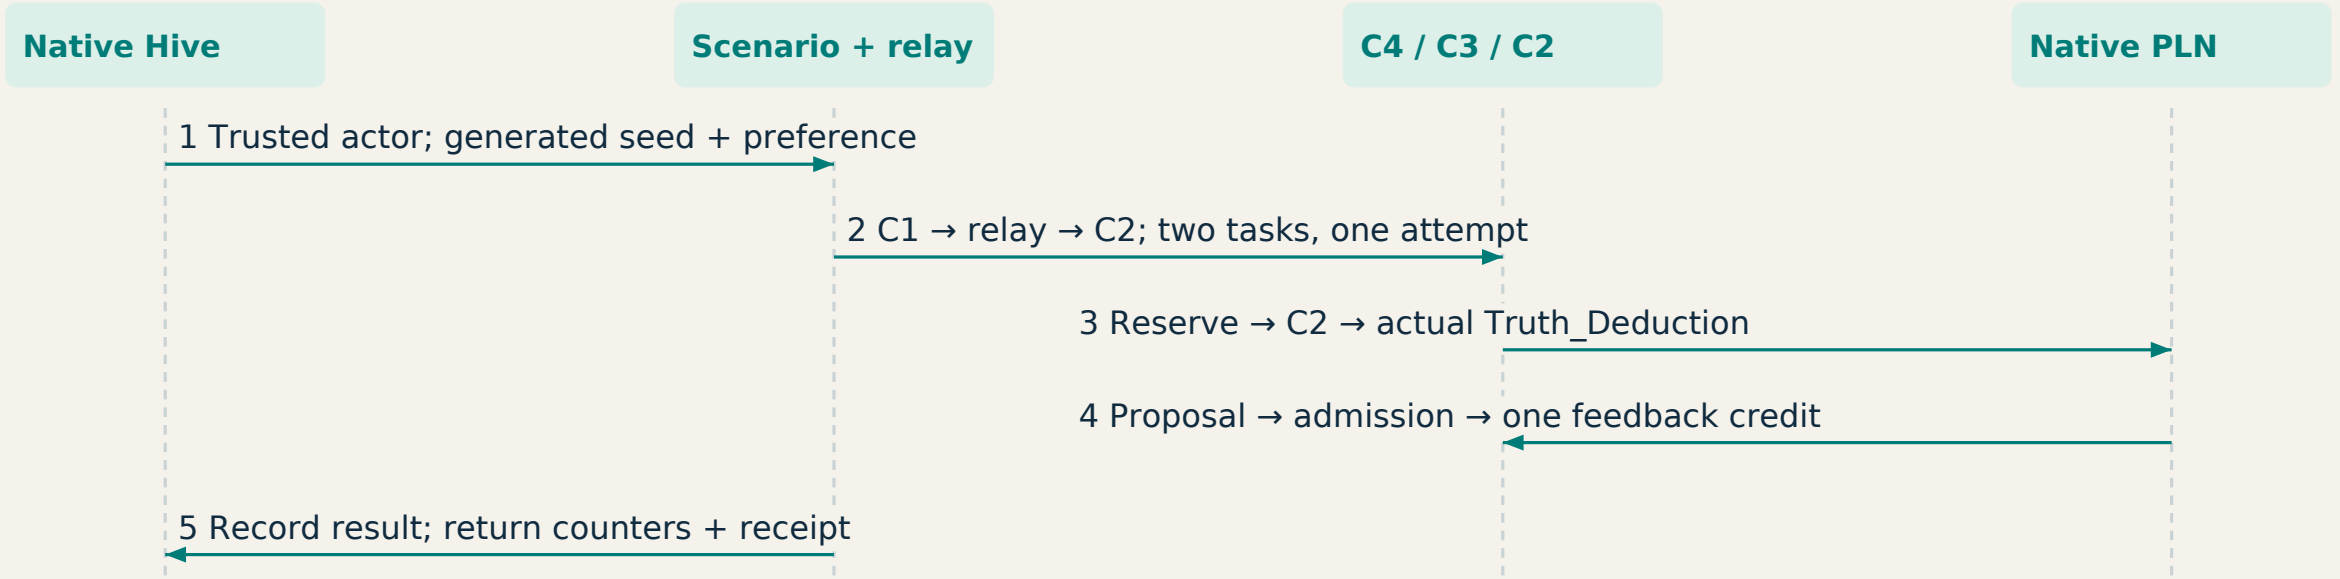

One private episode: 10 generated observations + action + result. Public receipt contains no private trace.

Native Hive exposes execution and closure separately

infer-generated → restart → reconcile-generated(original_command, limit)

Original execution · immutable

One examined candidate
One reserved / completed attempt
One unique admission · zero feedback applied

Later closure · versioned

Same original result and counters
Evidence backlog and feedback outcomes
Stale feedback retired without credit

Lost reply after feedback applied

Recover the original receipt after expiry or decay, even when current STI has reached zero.

Expired before execution

Hive can finish the action with zero admissions and zero reservations. Those counts stay explicit.

Public done / committed means the action returned. Detail reports execution, evidence and feedback closure.

The same one-attempt budget makes attention visible

Two eligible tasks have exact premises. Initial STI selects which one can consume the attempt.

Prefer task A

A	20
B	10

First attempt → A

Prefer task B

A	10
B	20

First attempt → B

Both attention providers preserve this effect; replay adds no native call and no second credit.

Attention changes scheduling. It does not alter premise truth values or manufacture independent evidence.

One artifact connects Hive, DA and the chain

The approved result is the exact result retrieved, committed and independently read back.

53-byte input

Generated and explicitly shareable
Real native fusion-inspect

→

143-byte result

Real worker + real DeTTa
Caller accepts and acknowledges

→

One commitment

Approved digest in real post-state
Matching finalized deploy effect

APPROVED RESULT SHA-256 · SAME VALUE AT EVERY STAGE

`cd2f727689b41e243ee78207d058d00b8be64932abbfd86a02851dfcbac400bb`

Counts remain stable

1 job · 1 outbox · 2 messages · 2 shared atoms

First finalized-effect observation

4.066 s · one native observe call · 675 phlo

These are local observations from one run, including proposal/observation overhead; no throughput claim.

Approval freezes the result and its destination

The public action accepts only original_command. Trusted composition supplies all sensitive choices.

Exact result

Generated command + seed + shared scope
Accepted result reference and digest

Exact authority

Authenticated actor + swarm + expiry
Live checks on new calls, replay and send

Exact destination

Source/profile + network + shard + genesis
Registered signer and protobuf identity

Exact operation

Fixed tuple and gas limits
Canonical copies detach mutable inputs

No caller-supplied code, digest, endpoint, signer or approval; revocation also blocks cached replies.

Finality is tied to the actual stored effect

Submission, inclusion and verified finalized effect are different observations.

1 · Submission

The node accepts the saved signed deploy. The effect is still pending.

2 · Inclusion

The exact deploy appears in a block with successful execution and cost.

3 · Verified effect

Read the exact tuple in that block’s post-state; match the deploy’s finalized effect.

Fixed on-chain value

(namespace, generated operation ID, approved result digest)

Independent verification

Same digest + deploy + block + post-state after node restart; no caller journal or signer.

The adapter verifies node-observed evidence. The chain does not certify off-chain PLN reasoning.

A lost reply reuses the same signed request

Persist the logical plan before signing, then persist the complete signed deploy before HTTP submission.

KILL BOUNDARY	AUTHORITATIVE DURABLE FACT	OBSERVED RECOVERY
After result acceptance	Caller acceptance; completion may need ack	Acknowledge same result, then approve
After signed-intent commit	Exact signed bytes and timestamp	Replay with signing key unavailable
After node send, before receipt	Original signed deploy identity	Retry after real finality; same request
After effect, before progress	Chain observation committed separately	Native caller recovers that observation

Node outage preserves the off-chain result. Restart the same genesis/data and read the same finalized effect.

The real chain ran in a disposable isolated network

Clean pinned F1R3node source; no public connection, upstream patch or consensus rewrite.

UNPRIVILEGED NETWORK NAMESPACE · LOOPBACK ONLY

Generated test genesis

One validator
Generated stake, wallet and key

→

Real F1R3node

9ec1096e1077…
Fresh source and local build

Observed sockets stay inside

P2P and gRPC wildcard listeners exist only in the namespace; no route to an external network.

From the host

All six probed ports refused connections while the node was ready.

From the namespace

External connection failed: ENETUNREACH. Host firewall unchanged.

Single-validator evidence establishes this local integration; multi-validator safety remains unrun.

Real providers and fixtures remain visibly separate

A real runtime can execute generated inputs. Each claim carries its own evidence label.

CLASSIFICATION	EXERCISED COMPONENTS	WHAT THE RESULT SUPPORTS
REAL PROVIDERS	Native Hive / Supervisor / PeTTa · DeTTa Pinned PLN · SQLite STI · isolated F1R3node	Actual runtime, durable owner state, chain effect and restart/readback
FIXTURES	Generated input, policy, grants, genesis and key Reference-message counterparty; atomic-file attention	Controlled inputs, replacement and deliberate fault/refusal cases
BLOCKED	None for required M4 prerequisites Exact historical dirty M1 chain source unavailable	M4 uses a separately validated clean source baseline
NOT_RUN	Multi-validator safety, power loss, distributed failover, empty global caches, migration, production economics	No claims beyond the supported local generated workflow

Executed tests preserve cognition and verify real chain

Repeated subsets overlap. These counts must not be added into a unique test total.

COMMAND / LAYER	CASES	EVIDENCE TYPE
Preserved M1–M3.1 regression	138 aggregate	Includes the 11 M4 fixtures; all native suites rerun
Focused commitment fixtures	11	Approval, replay, malformed effects and mutable aliases
Actual native Hive + real chain	6	All passed; four explicit native SIGKILL boundaries
Node outage / restart + readback	In native suite	Same data/genesis; separate reader; privacy + authority
M3.1 regression retained	9 / 5 / 3 / 7	Fixtures / provider / recovery / Hive; 16 + 4 kills
Both attention providers	Preserved	Old-profile compatibility and independent replacement

Final source: 55ed540. Missing prerequisites: 0 · executed failures: 0 · observation timeouts: 0.

M4 gates: native result to verified chain effect

All 10 required gates passed. CHAIN is required and real in this milestone.

GATE	RESULT	RECORDED EVIDENCE
BASELINE	PASS	Full M1–M3.1 regression; both attention providers and old profiles
CHAIN_SOURCE_BUILD	PASS	Clean pinned build; loopback-only namespace; live socket probes
NATIVE_HIVE_DA	PASS	Actual inspect dispatch + real DeTTa + labelled fixture counterparty
APPROVAL_BINDING	PASS	Exact immutable result/chain/profile; current authority and refusal cases
REAL_CHAIN_EFFECT	PASS	Actual inclusion post-state tuple + matching finalized deploy effect

No missing prerequisite, final executed failure or positive observation timeout is hidden in PASS.

M4 gates: recovery, privacy and independent readback

All 10 required gates passed. CHAIN is required and real in this milestone.

GATE	RESULT	RECORDED EVIDENCE
RECOVERY	PASS	Four caller/adapter kill boundaries; real node outage and restart
PRIVACY_ISOLATION	PASS	Private canaries and identifying derivatives absent; live isolation
REPRO_READBACK	PASS	Fresh pinned builds + independent reader checking the same artifact
DEMO_HANDOFF	PASS	Native receipts/progress, runnable commands and sanitized trace
SCOPE	PASS	Original DA, cognition, math, ports and inspect plugin preserved

No missing prerequisite, final executed failure or positive observation timeout is hidden in PASS.

Reproducibility connects source, build and observed result

The evidence-only descendant records a clean implementation tested at the same start/end revision.

LAYER	RECORDED STATE	BOUNDARY
Requested / actual start	985d2f3 → 8491c49	Presentation-only descendant before M4 changes
Clean tested implementation	55ed5402391a	Detached checkout; start/end runtime hashes match
Evidence snapshot	05b1c52cfa6c	Records final evidence; no later runtime/test edits
F1R3node source	9ec1096e1077 · clean baseline	Fresh build; historical dirty workspace unused
Native stack	Hive 34b0fb3 · DeTTa 272888f PLN 4405956 · SWI 10.1.14	Fresh provider builds; pinned guard code unchanged

Warm download caches and cached upstream Rust regression binaries are explicit; no provider binary was copied.

The limitations are part of the contract

A successful local commitment preserves the existing private cognition and closure limits.

One shareable workflow

Generated inspect result only. Private episodes, beliefs, provenance and identifying hashes stay private.

One real local validator

Node-observed effect and finality. No decentralized safety, trustless attestation or reasoning certification.

Fresh profiles and intact files

No journal migration. Recovery is same-host process restart; power loss and distributed failover unrun.

Bounded progress stays explicit

Old inference budgets stay spent; closure can remain pending. Chain observation is call-driven and finite.

Stopped at M4: no new cognition, scheduler, ECAN, LTI, search, migration or public-network attachment.

Keep the evidence.
Preserve the budget.
Verify the commitment.

Real Hive → real DeTTa → approved result → real local chain
with independent commits, restart and matching readback.

M4 COMPLETE · ALL 10 REQUIRED GATES PASS

Implementation map: responsibilities stay local

Follow interfaces and owner journals before following concrete provider classes.

RESPONSIBILITY	FILES / SURFACE	OWNED STATE
C1 / relay / original C2	episodes.py · evidence_relay.py · delivery_contracts.py	History; delivery + trusted completion
C2 derived admission	derived_beliefs.py · cognition_contracts.py	Fresh derived-beliefs.sqlite · local v3
C3 attention	attention.py · adapters/fixture_attention.py	SQLite or independent atomic-file state
Pure PLN providers	adapters/pln_deduction.py · pln_revision.py	No mutable domain state
C4 controller	inference.py · deadlines.py	Budgets / execution + separate closure journal
Composition / native caller	cognition.py · hive/inference_program/	Explicit provider bindings; caller receipt

Exact sources identify the verified native stack

Full revisions are printed here; source files and built binary hashes remain in the committed evidence.

Fusion · tested	`55ed5402391ab6ed14f8ab20e1eea4c85d8be955`
Hive schematics	`4af00db4e395375484dd48d0b9068a59afcf01f8`
Hive	`34b0fb32ab3806e5609fc89bb7535518a35e1aea`
DeTTa	`272888f264dd2dde18b574cabb53c266b0dac2ec`
Reachability	`dd56f3f053ed90239de5377021a7d3b3fbf424ac`
PLN	`4405956947c4b53c7ff01bd565aa3b114bc970a1`
PeTTa	`ae66fa8e41dcd5539d614706bd4e5cfb34f9608d`
SWI 10.1.14	`69775434c8226897626b226aefcc8266499f1e2e`
F1R3node	`9ec1096e10774926ea8e72f0823482f0bf9213e1`

metta-attention inspected at 3e1c8147; not used as the bounded STI provider.

Profiles and bounds make compatibility explicit

fusion-delivery-closure/1 selects fresh C1 / C3 / C4 journals; C2 and the math stay unchanged.

PORT / PROFILE	EXPLICIT SELECTION	KEY BOUND
C1 · local 3.0.0	episode-delivery-completion/1	16 pending; 256 events; trusted completion only
C2 derived · local 3.0.0	pln-derived-private/1 · unchanged	Historical premises and inherited support roots
C3 · local 2.1.0	sti-additive-linear-decay-closure/1	Existing STI, cause and command capacities
C4 · local 2.1.0	bounded-grounded-closure/1	1–16 resolutions/call; 128 commands/step
PLN kernel · local 2.0.0	grounded-five-premise-deduction/1	One unchanged native rule; five exact premises
Historical M1 / M2 / M3	Original descriptors remain selectable	No silent upgrade; no live state migration

New profiles close the seam; old stores stay explicit

The M3 findings were reproduced before edits. M3.1 is an opt-in contract extension.

Historical M3 profile

C1 expects a closed v2 acknowledgment.
C2 emits a v3 decision.
Delivery remains pending; stale feedback can remain CONFLICT.

Fresh M3.1 profile

Relay validates C2; C1 gets narrow completion.
Attention resolves original feedback.
C4 tracks closure separately from execution.


Populated old stores → new selection: UNSUPPORTED_PROFILE

Disposable copies reject without modification and still replay under the original profile. User stores are untouched.

No automatic conversion, repair of pre-existing pending work, invented acknowledgment or weakened validation.

One native operation crosses the existing interfaces

The caller stores intent; each provider commits only its own state.

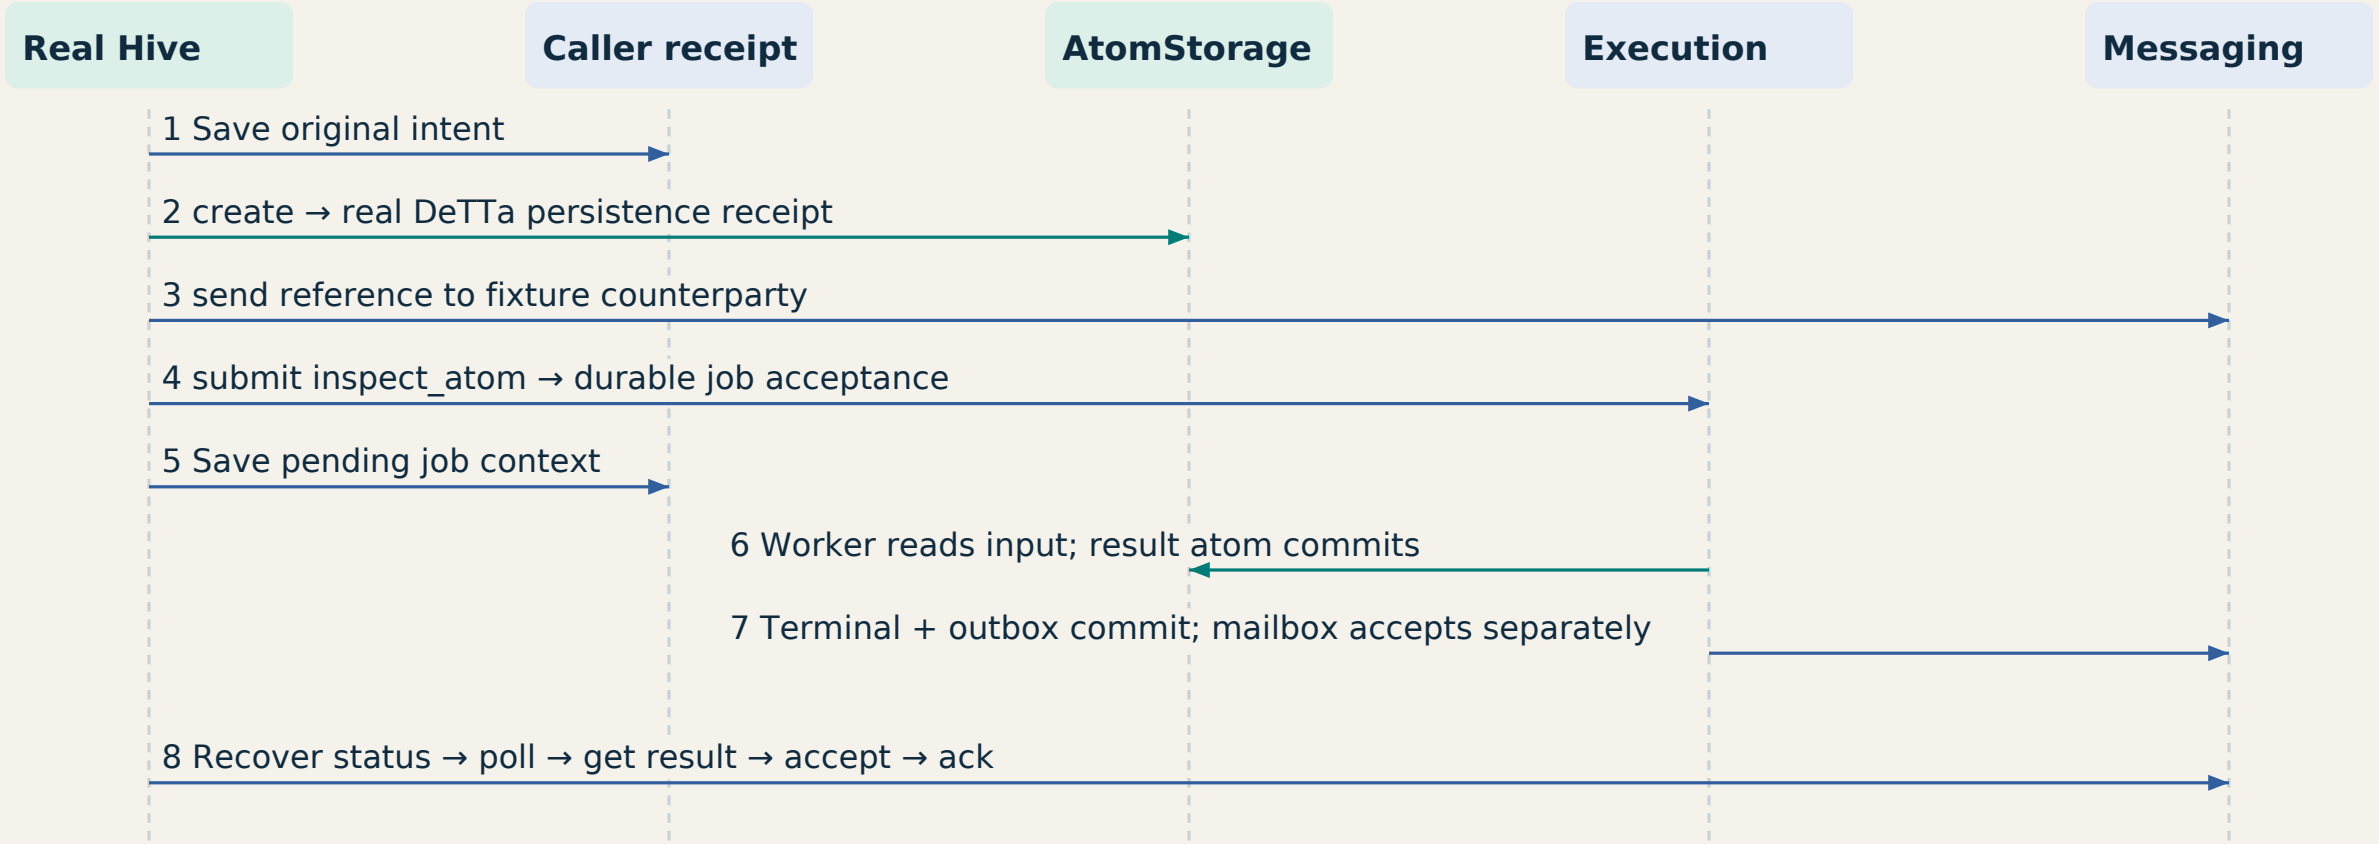

Historical M1: one result reached an isolated chain

This is the earlier protocol-peer artifact. No M1.2, M2, M3 or M3.1 Hive result was submitted.

PENDING
Signed deploy accepted

→

INCLUDED
Block observed; effects pending

→

FINALIZED
Deploy effects reported finalized

M1 recorded observation

Block height	**3**
Execution error	**false**
Rejection count	**0**
Execution cost	**351 phlo**

Historical commitment digest

```
f9236451ff785dc58315251cf864a3d1
0938412551cf45f448055061bc953ea1
```

One local validator; direct node observations.
Not a consensus proof or production test.

Historical M1 reproduction stays BLOCKED. M4 separately passes with a verified clean source baseline.

Reproduce the required real M4 gates

Use tested 55ed540 or a reviewed descendant; fresh build/evidence destinations and authorized source access.

BUILD PINNED HIVE / DETTA / PLN + CLEAN F1R3NODE

```
uv run --python 3.11 --locked python \
scripts/build_m4.py <FRESH_BUILD>
```

VERIFY REGRESSIONS + NATIVE CHAIN + RECOVERY + READBACK

```
uv run --python 3.11 --locked python \
scripts/verify_m4.py <FRESH_BUILD> --output <FRESH_EVIDENCE>
```

Read: manifest → same-artifact → readback → verification → regression summaries

Separate reader: scripts/readback_m4.py · DA get-only authority + read RPC · no caller journal or signer.

Retry identities answer different questions

Preserve the logical cause while distinguishing transport replay from physical evaluation attempts.

IDENTITY / STATE	MEANING	RECOVERY ACTION
Request / step ID	Exact immutable command intent	Same body replays; changed body conflicts
Logical derivation ID	The same exact grounded conclusion	Deduplicate admission and causal feedback
Attempt key + reserved slot	One physical evaluation opportunity	Pending death spends slot; new key needs budget
Committed C2 decision	Saved authoritative admission outcome	Read first; do not recalculate
C3 causal feedback receipt	One workflow credit for logical admission	Recover acknowledgment; do not credit twice
Deadline / generation watermark	Durable limits across process restarts	Do not reset, refund or implicitly retime

M4 adds one profile and two narrow native actions

Existing ConsensusFinality signatures and legacy providers remain unchanged; fresh journals are required.

SURFACE / OWNER	CONTRACT OR CODE	DURABLE RESPONSIBILITY
Native commitment caller	integration/hive/commitment/	Original command mapping; public progress
Completed-result accessor	integration/hive/program/completed.py	Read caller-owned acceptance and ack
ConsensusFinality adapter	fusion/adapters/f1r3_m4.py	Plan → signed intent → receipt → observations
Signing boundary	fusion/adapters/f1r3_signing.py	Pinned serialization + registered local signer
Explicit compatibility	f1r3-generated-post-state/2	f1r3-local · interface 1.0.0 · impl 0.4.0
Bounded native observation	≤120 calls; stop starting after 180 s	≤256 saved observations; explicit exhaustion