


ACTIONS

- THERE ARE 4 VERSIONS OF VIEW() (CONTROLLER → VIEW)

- 1 View () → METHOD NAME
- 2 View ("A") → VIEW "A"
- 3 View (model) → MODEL DATA (@ model AT THE TOP OF THE VIEW)
- 4 View ("A", model) → 2 AND 3 TOGETHER

- VIBRATION & TEMPERATURE

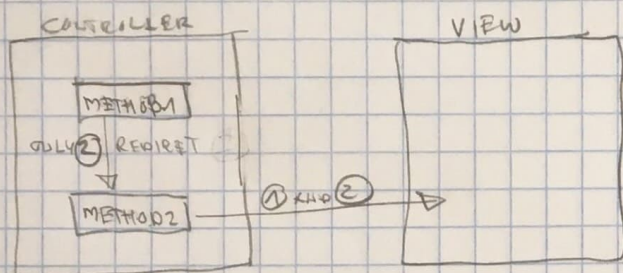

TEMPDATA INVOLVES TO ADD
ADDRESSION () IN STARTUP FILE

- SESSION VERKOLB

ALL TYPES:

- ```

- Startup ()
 - services.AddSession ()
 - " AddSingleton <HttpContextAccessor, HttpContextAccessor> ();
 - app.UseSession ();

```

## STRINGS, INT, SIMPLE TYPES:

(Top 10K is SetInt32C)

- ```

- Controller
  action method ()
  { HttpContext.Session.SetString("...", e.g. DateTime.Now.ToString()); }

```

- View

② `HttpContextAccessor`, `HttpContext`, `session`, `GetString` ("...")

COMPLEX TYPES:

- MOBEL

```
public static class SessionExtensions
```

```
public static void Set <T> (this Session session, string key, T value)
{ session.SetString (key, Json Convert. SerializeObject (value)); }
```

```
public static T Get<T> (this Session session, string key)
```

```

} var value = session.GetString(key);
return value == null ? default(T) : JsonConvert.DeserializeObject<T>(value);
}

```

- CONTROLLER

public ActionResult SessionExample
 {

```

GIVING VALUE } HTTPContext - Session. Set <Person> ("Mack" person);
GETTING VALUE " " Get " " { " " } ;
} return View();

```