

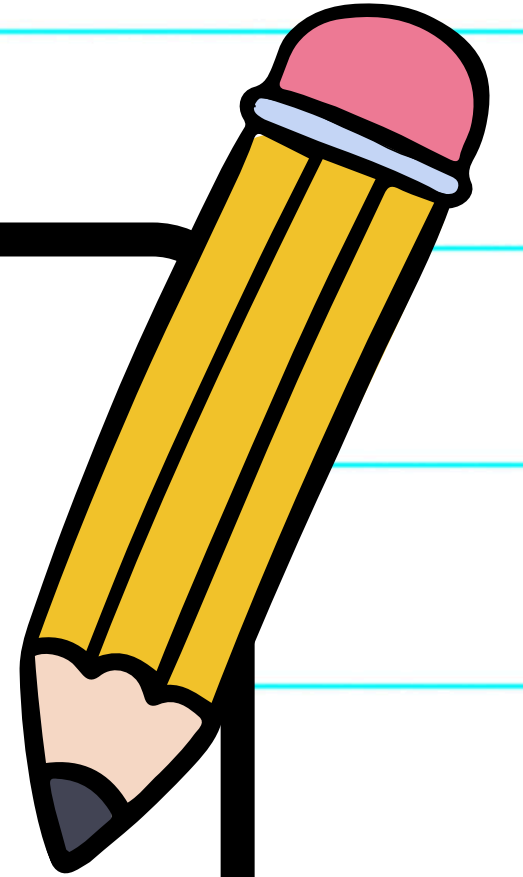


SESSION 2


DXFORM SENIOR GUILD
LECTURE

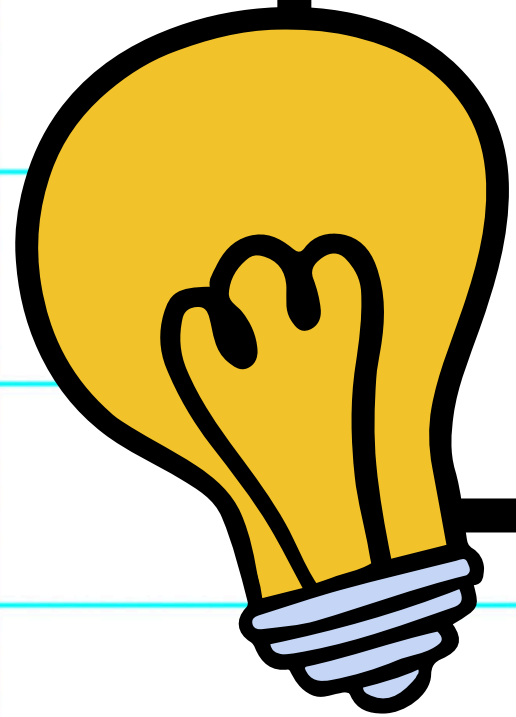

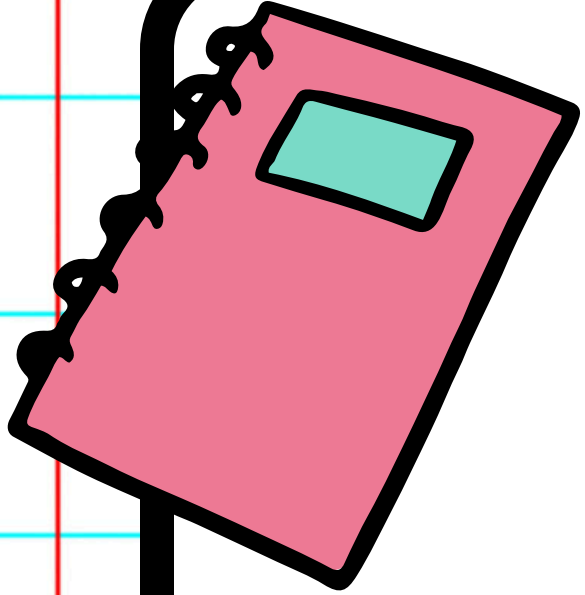

SECURING SERVER


- Basic Linux security
- Firewall Management

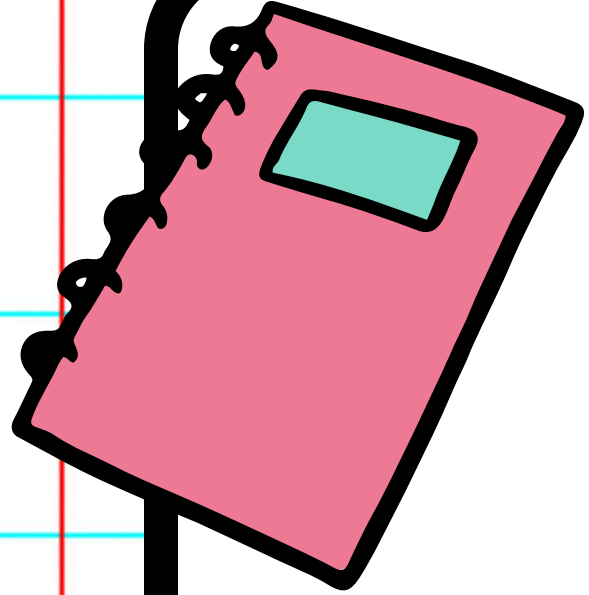

WHY?

“Securing are for noobs.”


“I don’t need dat shii”

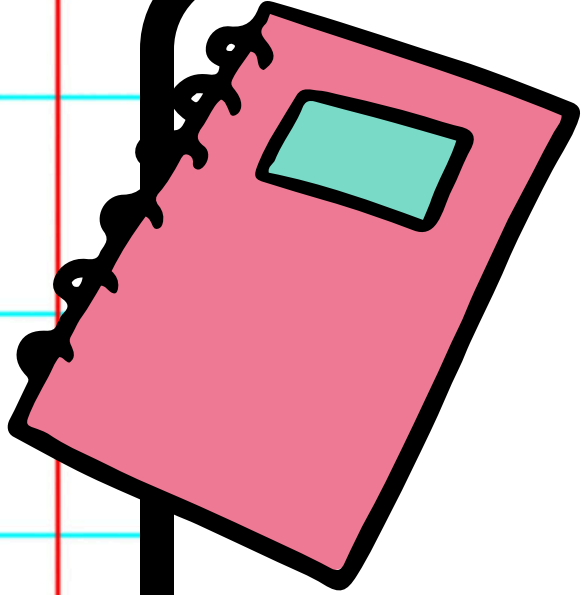

UNDER ATTACK

fax no printer: When you create a server
you are IMMEDIATELY under attack.


```
sudo tail -f /var/log/auth.log
```

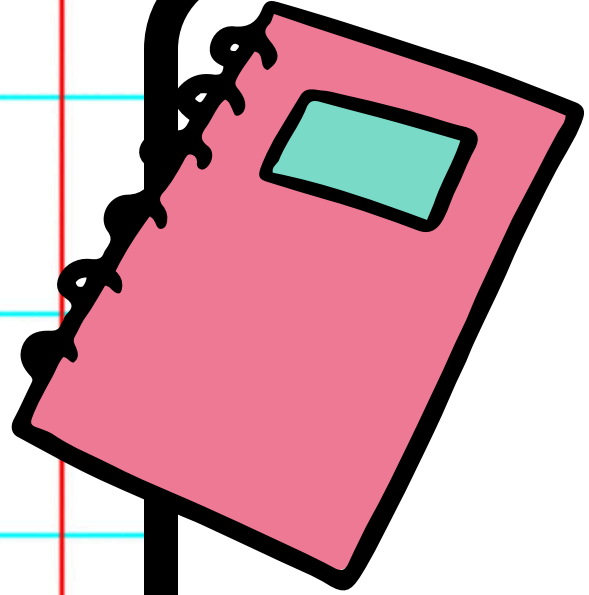

WHAT TO DO?

Give up


Change Career

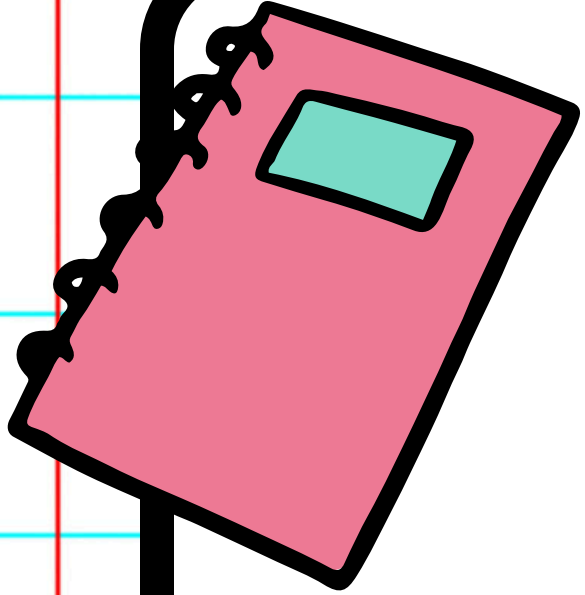

FOREALS DOE?

Give up


Change Career

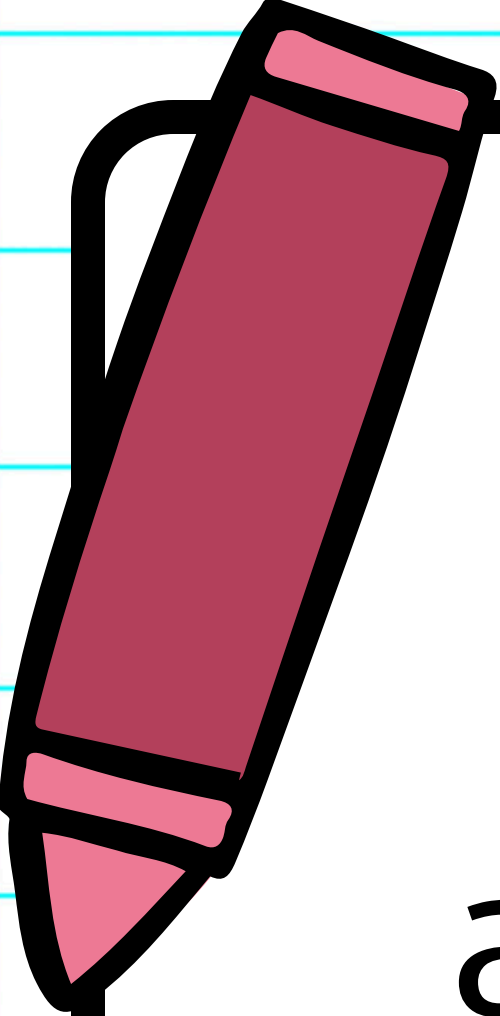

ALWAYS NON ROOT


adduser mac

usermod -aG sudo mac

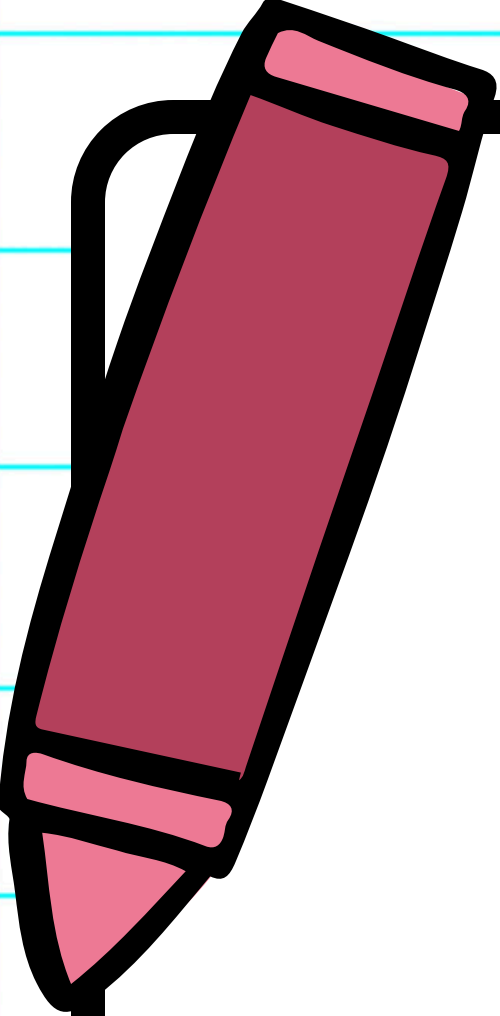

NO TO PASSWORD


Use `ssh-key` **ALWAYS**

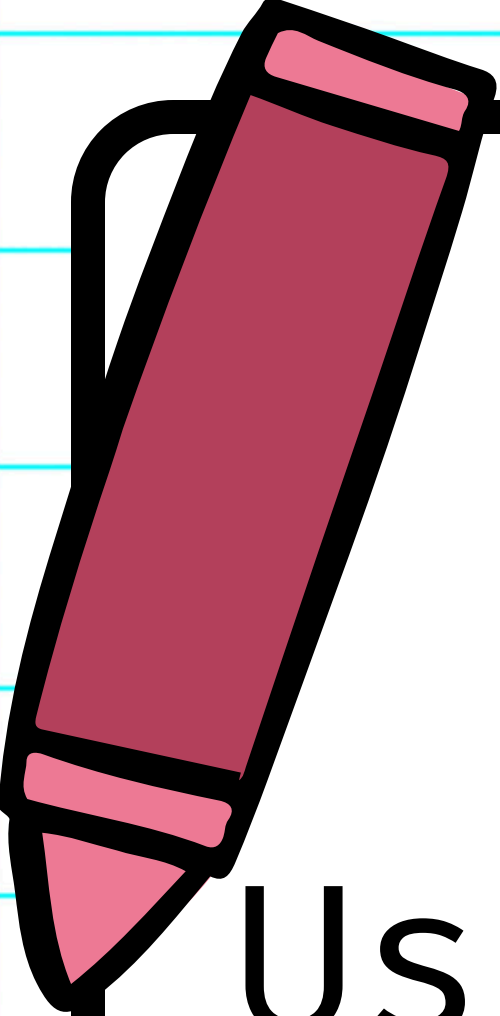


NO TO PASSWORD

Use `ssh-key` ALWAYS


`edit /etc/ssh/sshd_config`

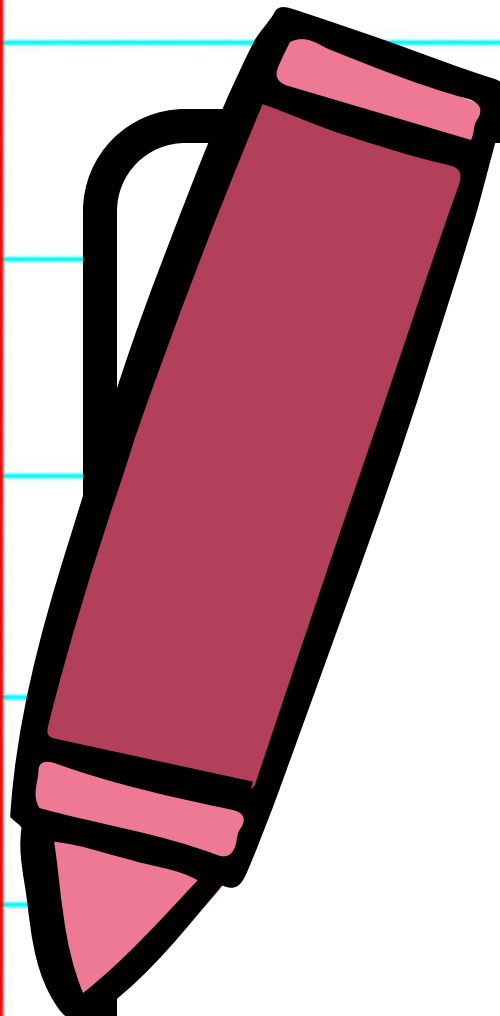

VFW IS KEY

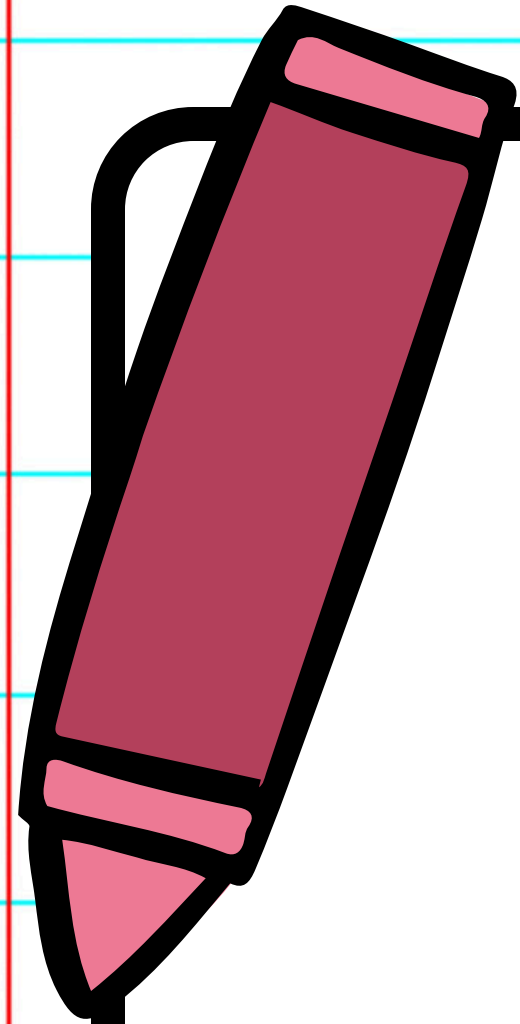


```
sudo ufw default deny incoming  
sudo ufw default allow outgoing
```

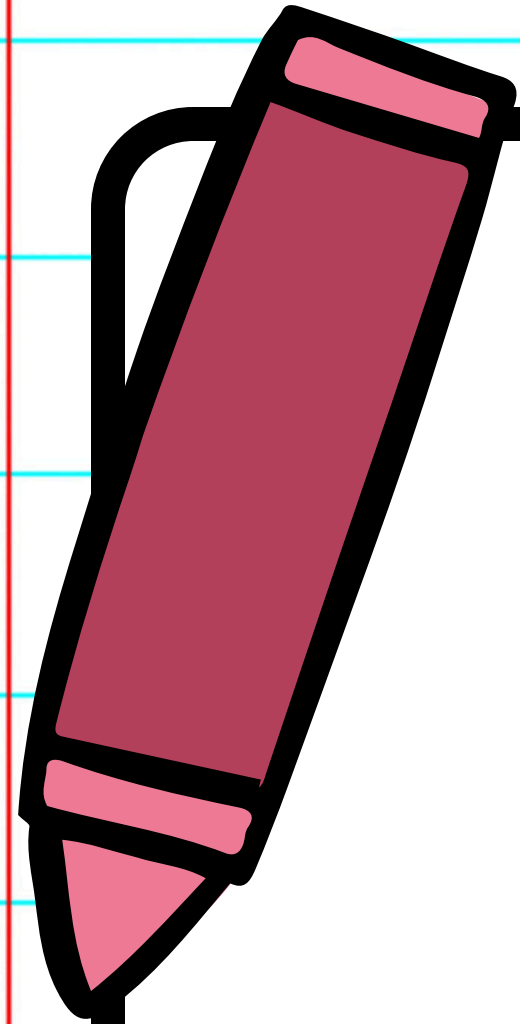

```
sudo ufw allow 22/tcp
```


```
sudo ufw allow 80/tcp
```

```
sudo ufw allow 443/tcp
```

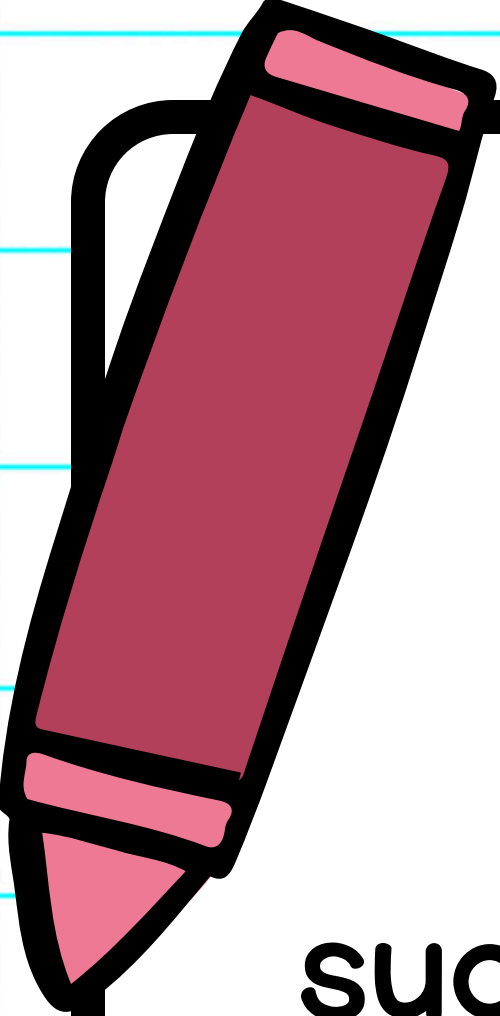


WHITELIST?

```
sudo ufw allow from 1.2.3.4 to any port 22
```

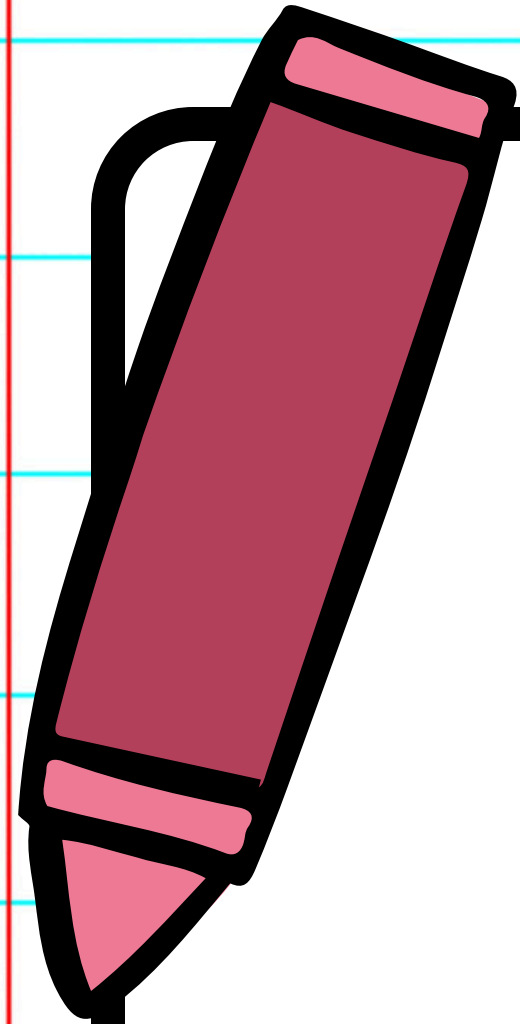
ALLOW FULL NGINX

```
sudo ufw allow 'Nginx Full'
```

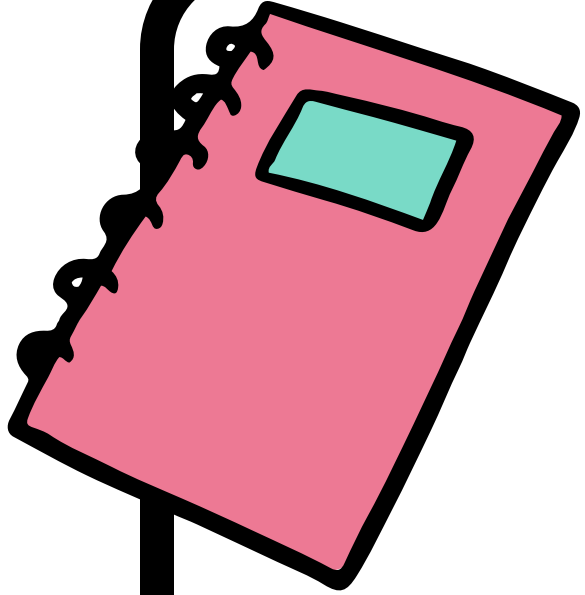


DEPLOYING APPS

- nodejs
- pm2
- nginx

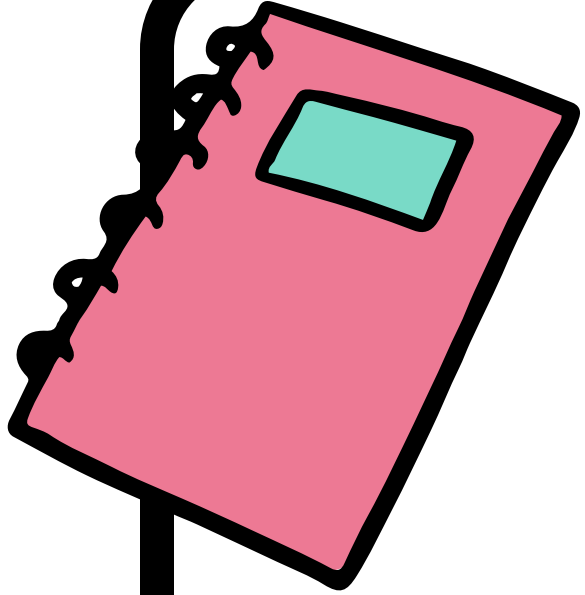

WORKER THREADS

- why? v8-engine sucks
- purpose? improve performance
- utilize all cpu cores / threads
- circumvent blocking state compute

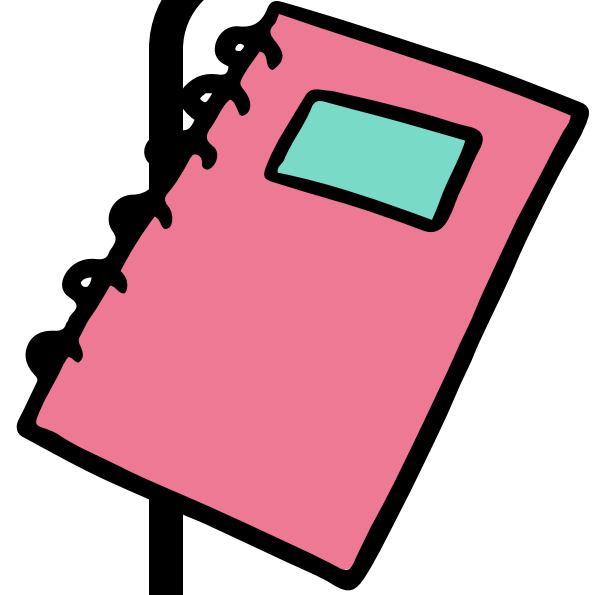

NGINX LOADBALANCER

- When to use?
- What's the purpose?

