

CopyTrust

Illustrated Workflow Guide

A visual walkthrough of copy modes, direct sessions, mixed queues, relay chains, post-copy actions, and the verified P5 archive handoff.

CopyTrust 2.7 operator workflow


Crash-report privacy

CopyTrust is configured not to capture or transmit media paths or private information through Sentry. Collection features are disabled and an on-device filter removes media paths and filenames, P5 details, credentials, and operator/client information before upload.

Generated from repository screenshots and workflow scenario definitions

Choose a copy mode

Select Card for camera-card ingest or Folder for general folder copies; each mode keeps an independent settings profile.

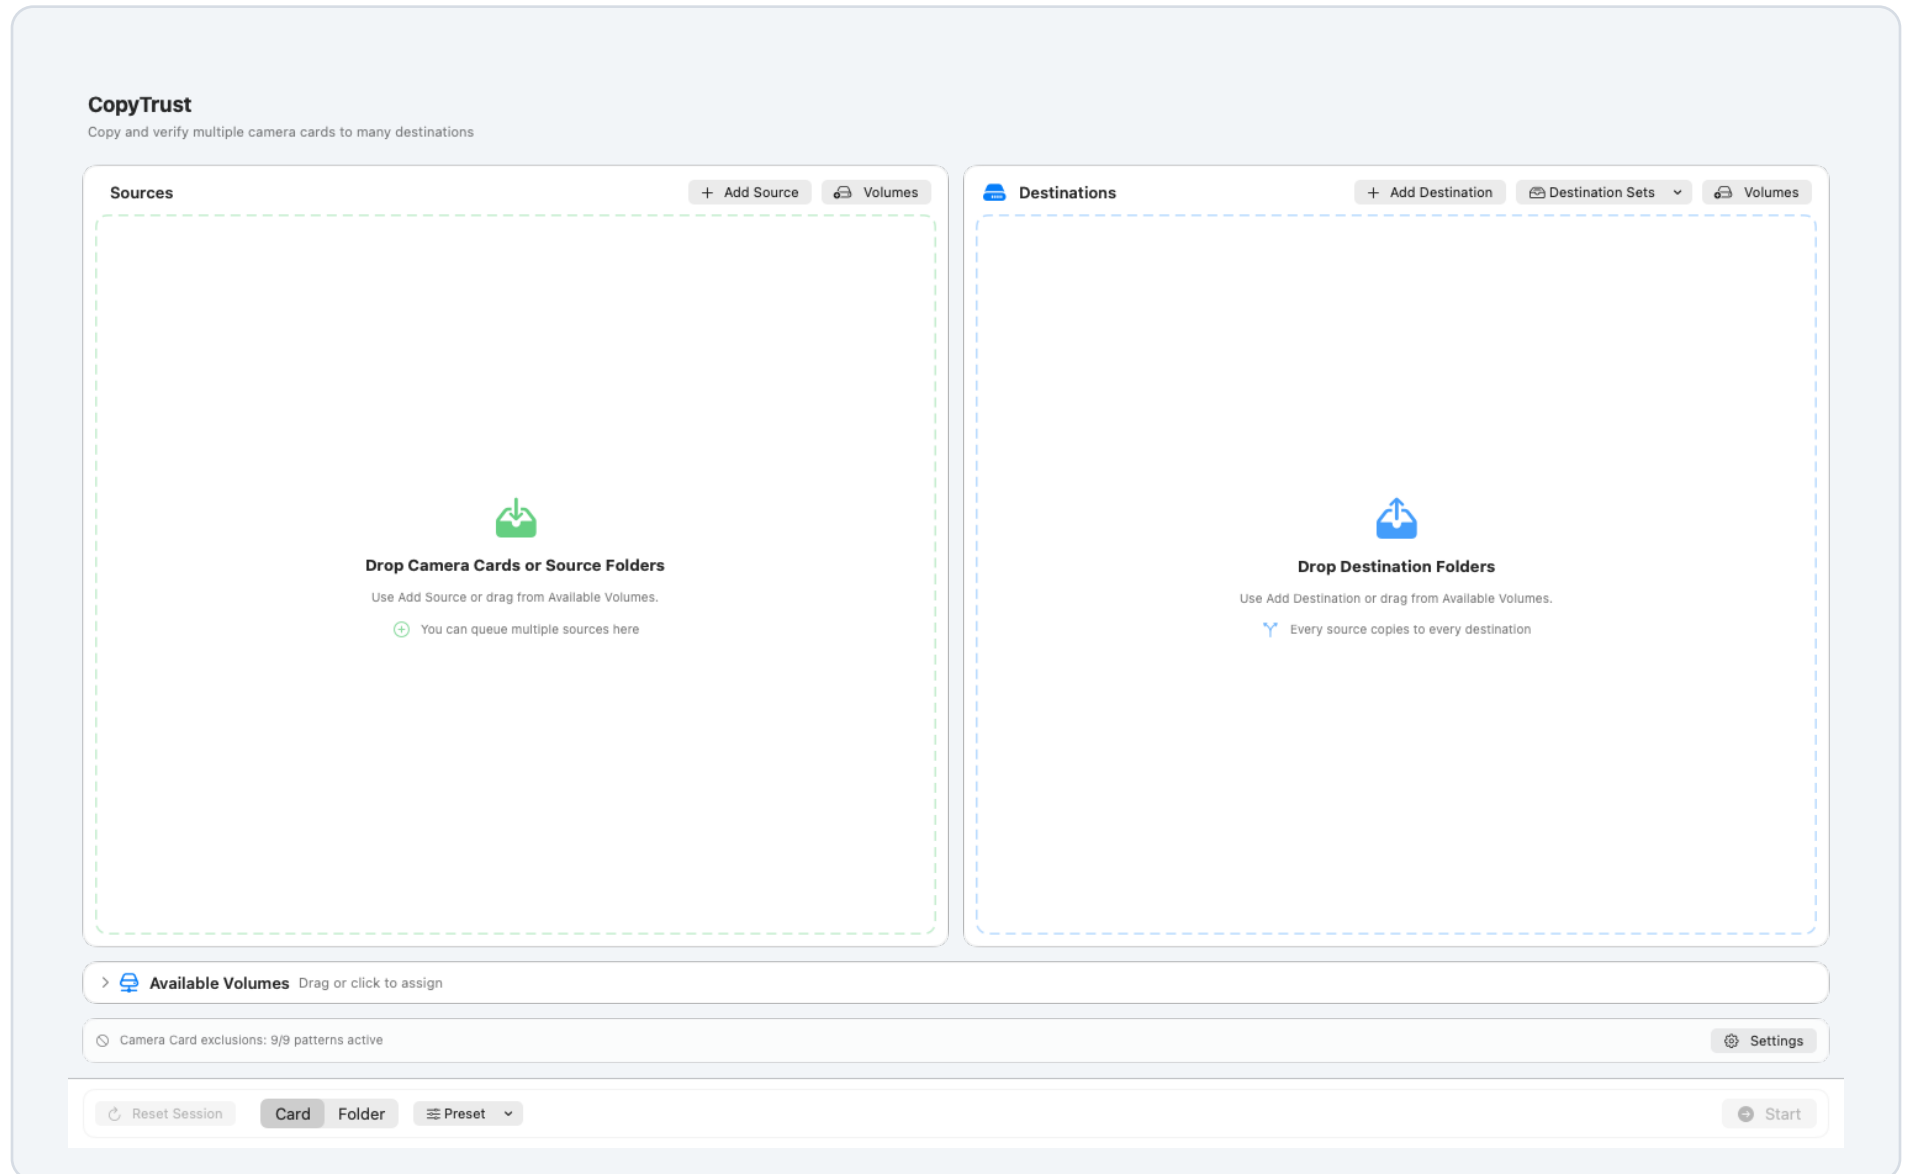

Prepare a direct session

Add one source and one or more destinations, confirm the naming preview, and check preflight before starting.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source Volumes

 **A001** DCIM Canon ⊖

A001 Card

/Volumes/A001

Scanning...

+ Add another card...

Destinations

+ Add Destination Destination Sets Volumes

 **Example SSD** Volume ⊖

Example_SSD

/Volumes/Example_SSD

☐ Archive to P5 ☒ Create proxies

+ Add another destination...

> Available Volumes Drag or click to assign

Queued Sessions (0)

Stage this setup for later
Queue Current Session, in the bar at the bottom of the window, saves this source and destination setup, then clears the workspace so you can build the next one. It does not start copying by itself.

No queued or chained sessions yet.

Camera Card exclusions: 9/9 patterns active Settings

Reset Session

Card Folder

Preset

Preflight passed

P5 Off

Start blocked

Queue Current Session

b40

b40_A001_2026-04-07_1

Start

Stage mixed queued jobs

Queue separate Card and Folder jobs when different sources need different destinations or post-copy settings.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source Volumes


Drop Camera Cards or Source Folders
Use Add Source or drag from Available Volumes.
+ You can queue multiple sources here

Destinations

+ Add Destination Destination Sets Volumes


Drop Destination Folders
Use Add Destination or drag from Available Volumes.
Y Every source copies to every destination

> Available Volumes Drag or click to assign

Queued Sessions (3)

Run the queued list
Start Queue runs queued sessions in order. Copy, verify, MHL, and receipt work finish first; PDF/CSV artifacts continue in the background and do not block the next queued session.

Start Queue

> A001 → Example SSD + Example NAS Card
1 source → Example SSD, Example NAS

Queued Load ↑ ↓

> Example_Project → Example Archive Folder

Queued Load ↑ ↓

Reset Session

Card Folder

Preset

Start

Build a relay chain

For A to B to C, order destinations fastest first, set the Copy switch to In series, then click Start so each downstream leg waits for verified upstream output.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source Volumes

 **A001** DCIM Canon

A001 Card
/Volumes/A001
Scanning...

+ Add another card...

Destinations

+ Add Destination Destination Sets Volumes

Copy Simultaneously **In series**

Each stop's verified output becomes the source for the next, so the source is read once. Put your fastest drive first.
A001 → Example SSD → Example NAS

 **Example SSD**

Stop 1 Example_SSD Volume
/Volumes/Example_SSD

☒ Archive to P5 ☐ Create proxies ↑ ↓ ⊘

 **Example NAS**

Stop 2 Ingest Volume
/Volumes/Example_NAS/Ingest

☐ Archive to P5 ☒ Create proxies ↑ ↓ ⊘

+ Add another destination...

> Available Volumes Drag or click to assign

Queued Sessions (0)

Stage this setup for later
Queue Current Session, in the bar at the bottom of the window, saves this source and destination setup, then clears the workspace so you can build the next one. It does not start copying by itself.

No queued or chained sessions yet.

Camera Card exclusions: 9/9 patterns active Settings

Reset Session Card Folder Preset Preflight passed P5 Off Start blocked Queue Current Session b40 b40_A001_2026-04-07_1 Start

Set post-copy actions

Use the Post-Copy tab to configure confirmation, contact sheets, metadata, HTML trees, proxy media, and destination sorting for Card or Folder mode.

Card Copy | Folder Copy | **Post-Copy** | P5 Archive | External Codecs | Notifications | Test

Before Copy

Confirm copy mode before starting ☐

Shows the mode, verification level, and artifact settings before each new session starts. Auto-advanced cards and resumes are not interrupted.

During Copy

Open the activity log when a copy starts ☐

Off by default: a running copy leads with the progress panel — percentage, speed, time remaining, per-destination bars and verified files. The log is still one click away under Activity Log, and the full log file is always written to disk.

Configure artifacts for Card Copy Folder Copy

Card mode is active — changes apply to the next copy.

Contact Sheet

Generate contact sheet PDF ☐

Layout style Row (detailed metadata)


Open contact sheet automatically after creation ☐

Hide unsupported format placeholders ☐

Done

Pre-copy workflow review and durable evidence


See the whole topology and every destination choice before execution, then preserve the queued intent.

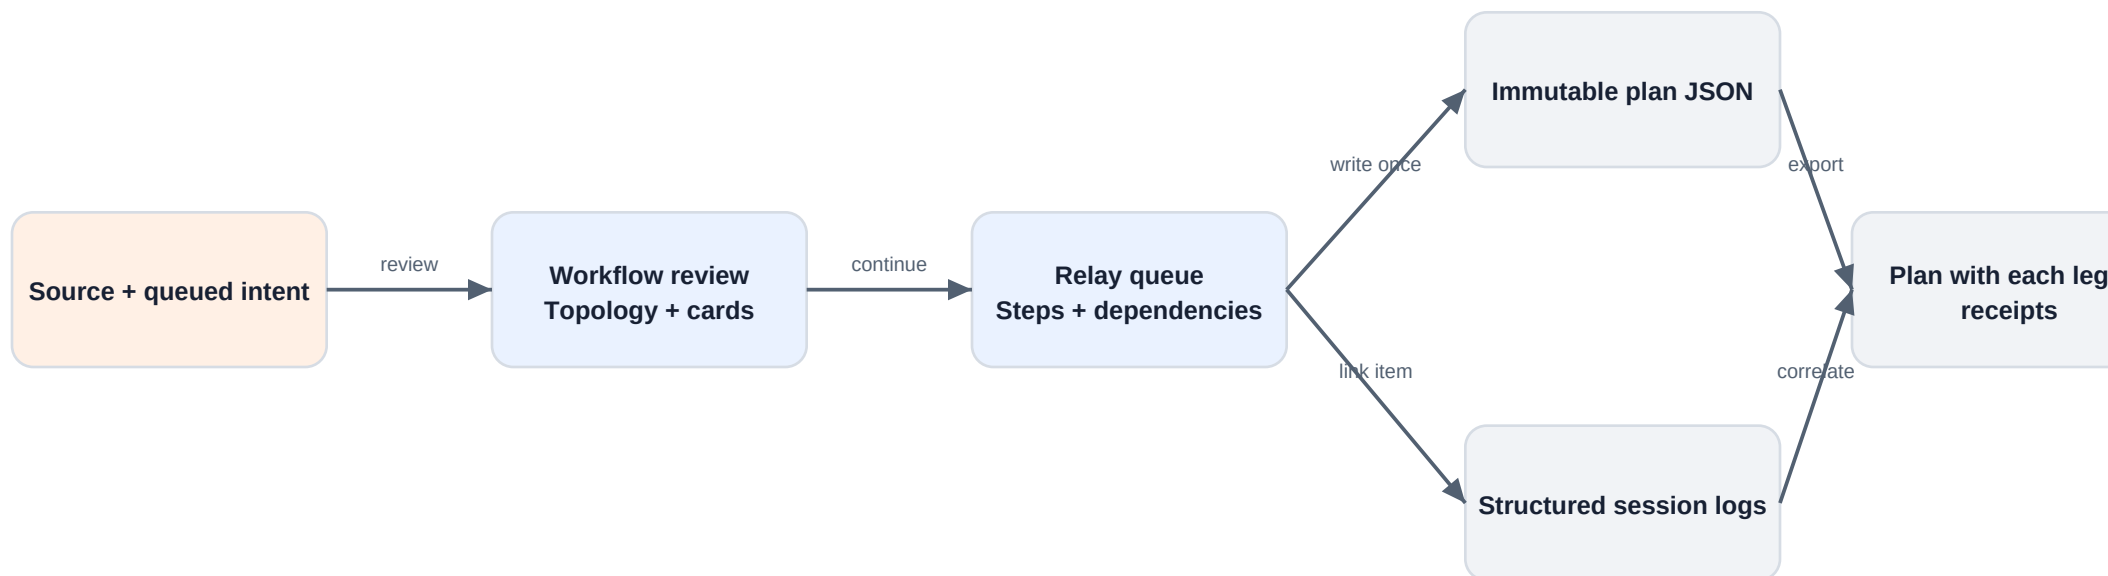

- Destination cards independently show verification, sorting, artifacts, proxies, and P5.
- The password-free plan records sequence/step IDs and dependencies before any relay leg runs.
- Rotation and reported color are probed before proxy scaling and encoding.

Direct copy: A to B


The simplest trusted ingest: one source, one independently verified destination.

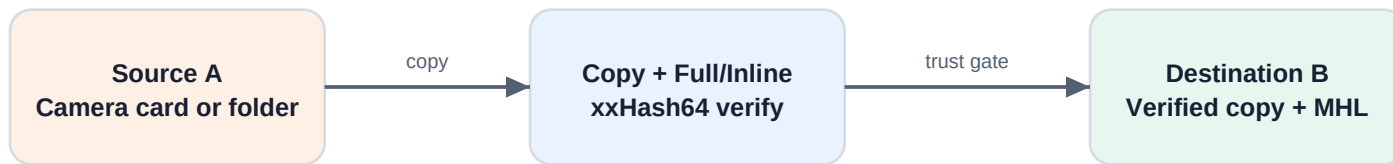

- Use Full or Inline when the result may later be archived to P5.
- Quick proves size/existence only and does not create hash-backed MHL evidence.

Fan-out copy: A to B and A to C


CopyTrust reads the same source into two independent verified destinations.

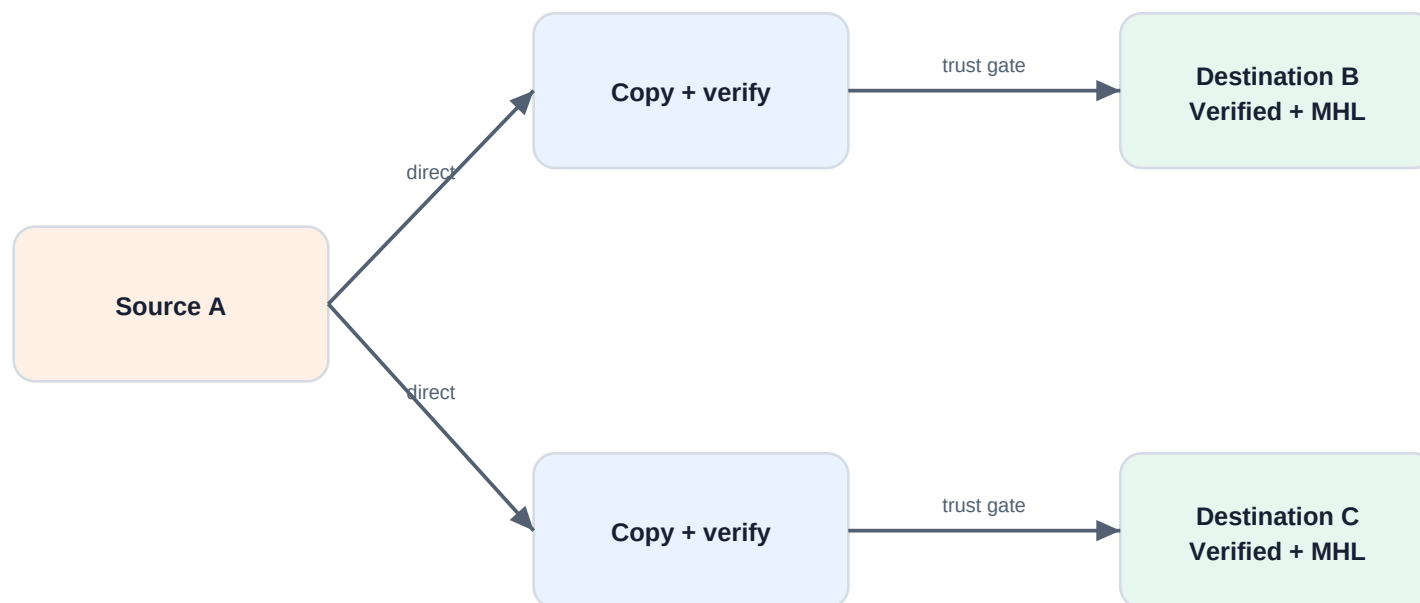

- B and C are separate results; inspect both destination verdicts and receipts.
- This protects the card with two copies without making either destination depend on the other.

Relay chain: A to B, then B to C


The verified output on B becomes the source for the downstream copy to C.

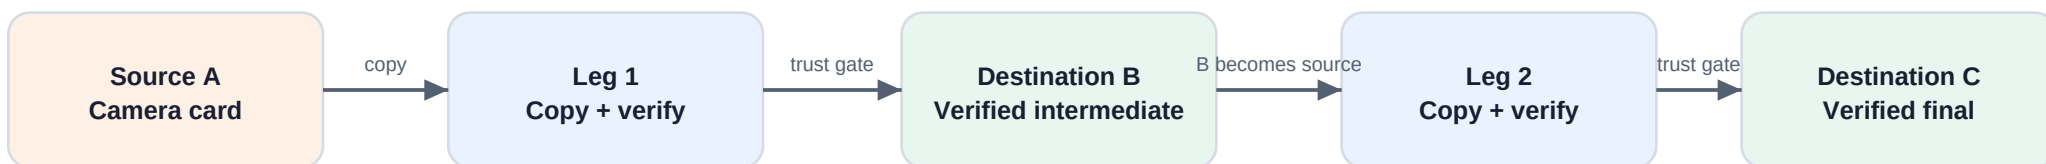

- Leg 2 waits until B is trust-complete; a failed Leg 1 blocks downstream copying.
- With Destination Sort enabled, CopyTrust currently sorts only the final relay destination.

Copy A to B, then archive B to P5


A verified destination can become the selected archive master after post-copy work finishes.

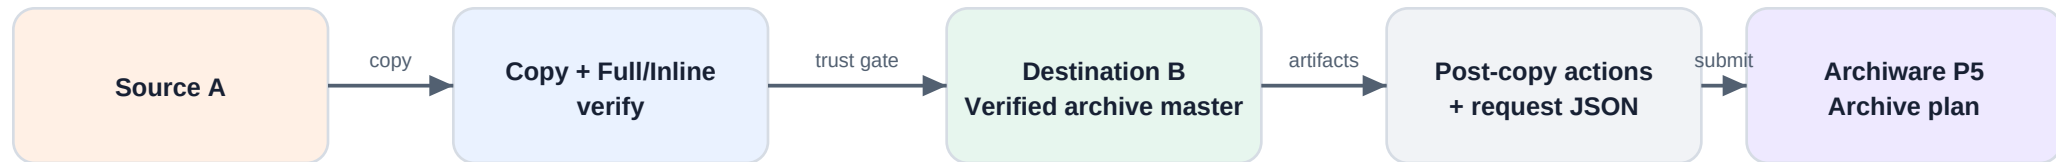

- The selected P5 client must see B at the same absolute path.
- Use a non-deleting plan; verify the job and searchable CT metadata in P5 Web.

Fan-out A to B and C, archive designated B


Keep two verified copies while sending only the chosen archive-master destination to P5.

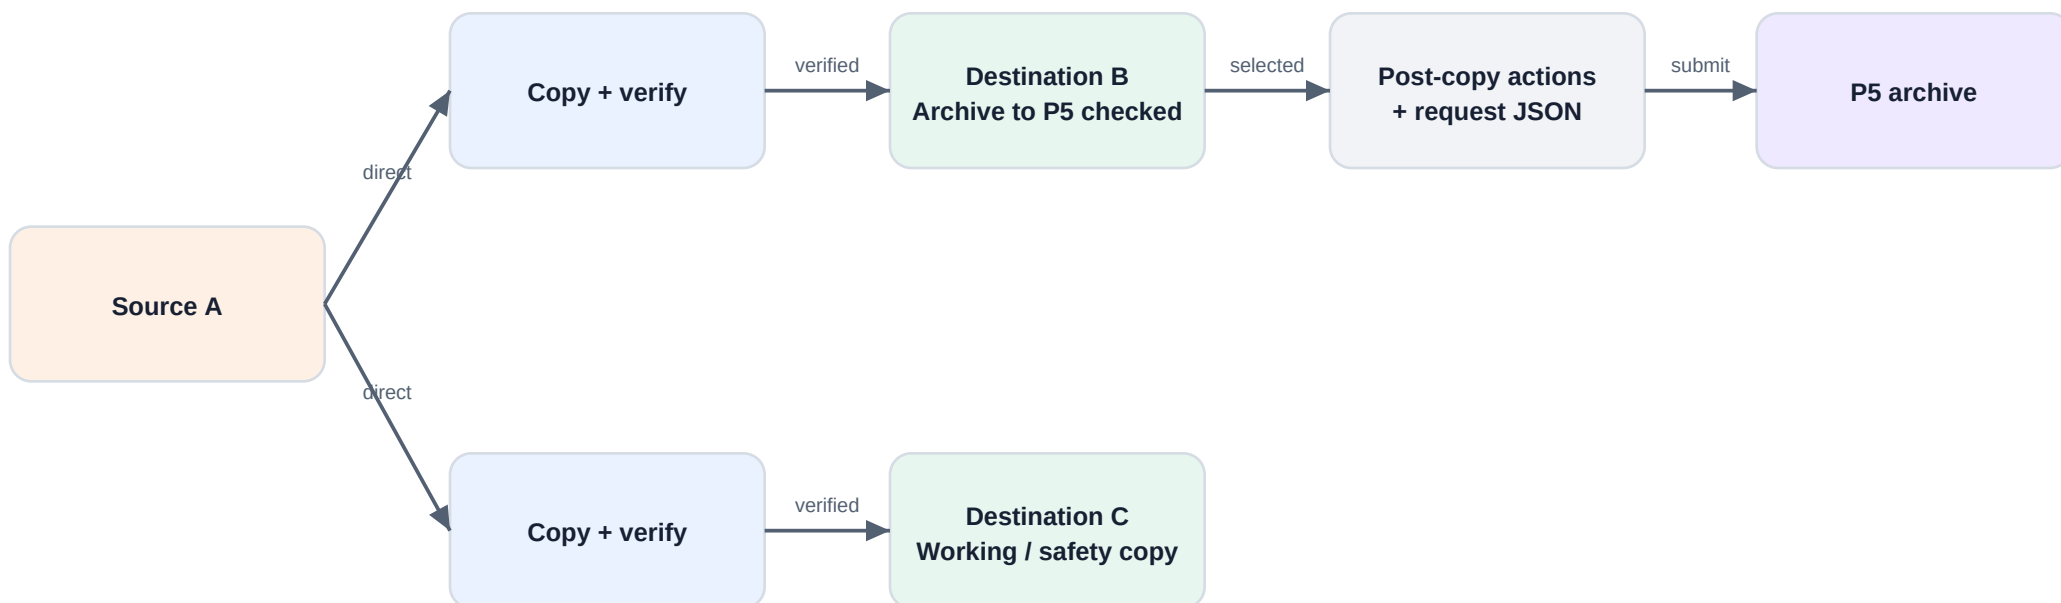

- Check Archive to P5 beside B; selecting another destination clears B.
- C remains an independent verified copy and is not silently included in B's archive request.

Naming, sorting, artifacts, proxies, and archive order


Trust-critical work is sealed before optional transformations and derivatives.

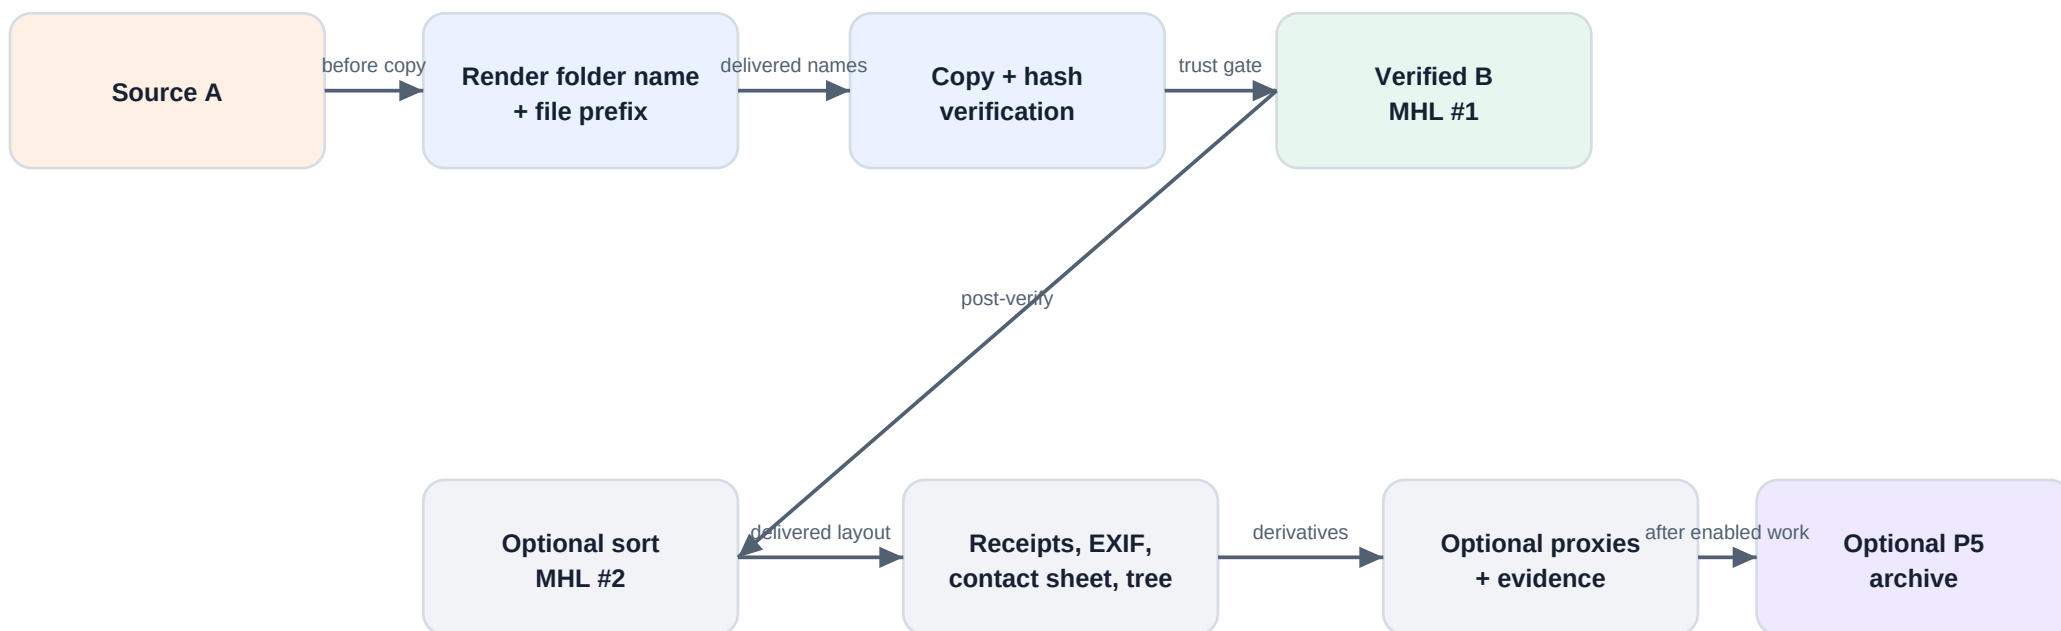

- Sorting remaps delivered paths and writes a sorted-layout MHL while preserving source-layout evidence.
- Artifact, proxy, or P5 failure never upgrades or downgrades the verified-original result.

Offline P5 handoff, restore, and re-verification

The password-free request preserves intent when P5 is unavailable and the MHL closes the restore loop.

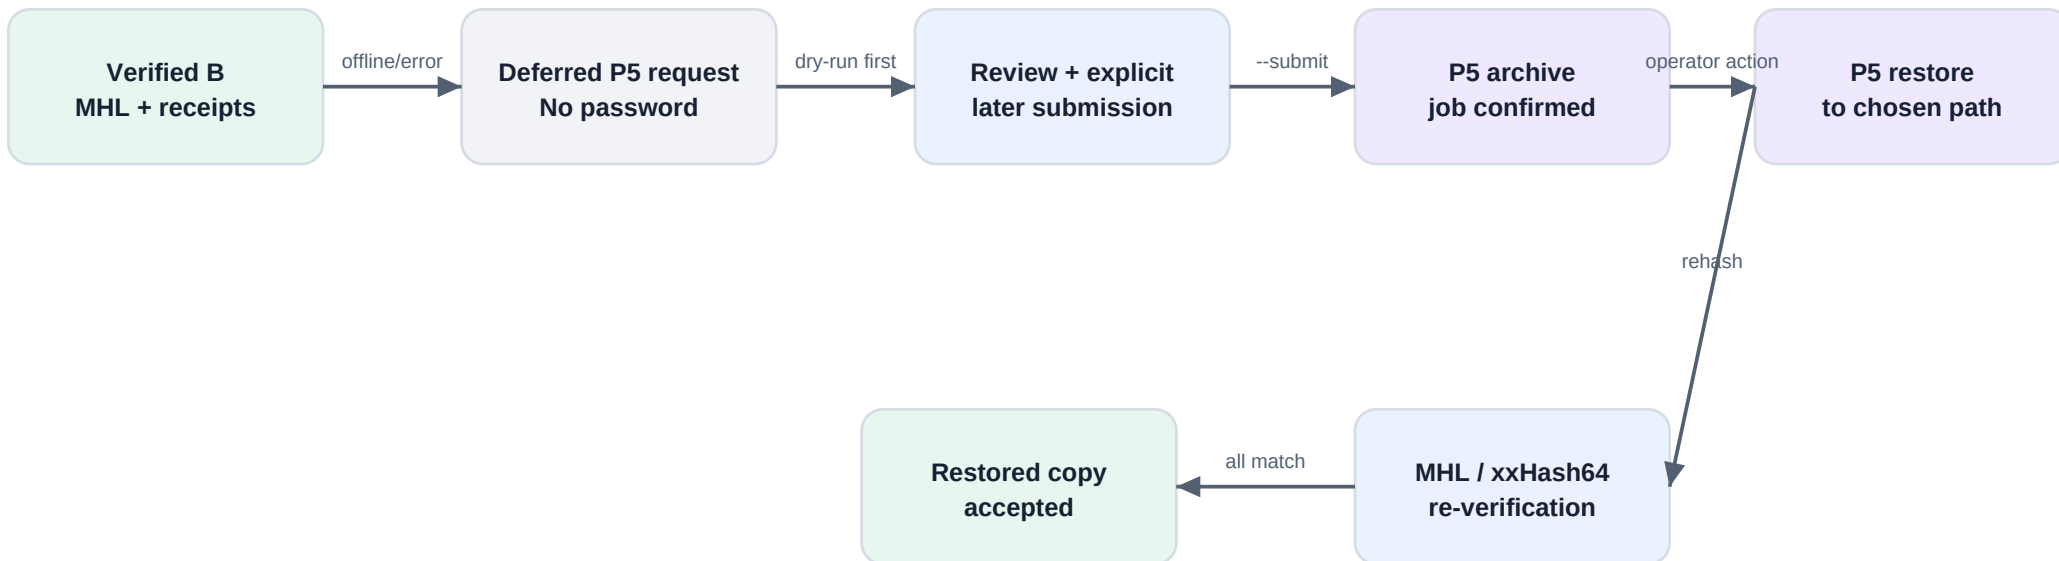

- The JSON records paths, hashes, metadata, target hints, job state, and actionable errors.
- Archive presence is not restore proof; accept restored media only after hash verification.