CopyTrust

Illustrated Workflow Guide

A visual walkthrough of copy modes, direct sessions, mixed queues, relay chains, post-copy actions, and the verified P5 archive handoff.

CopyTrust 3.0.6 operator workflow


Crash-report privacy

CopyTrust is configured not to capture or transmit media paths or private information through Sentry. Collection features are disabled and an on-device filter removes media paths and filenames, P5 details, credentials, and operator/client information before upload.

Generated from repository screenshots and workflow scenario definitions


01 Choose a copy mode

Select Card for camera-card ingest or Folder for general folder copies; each mode keeps an independent settings profile.

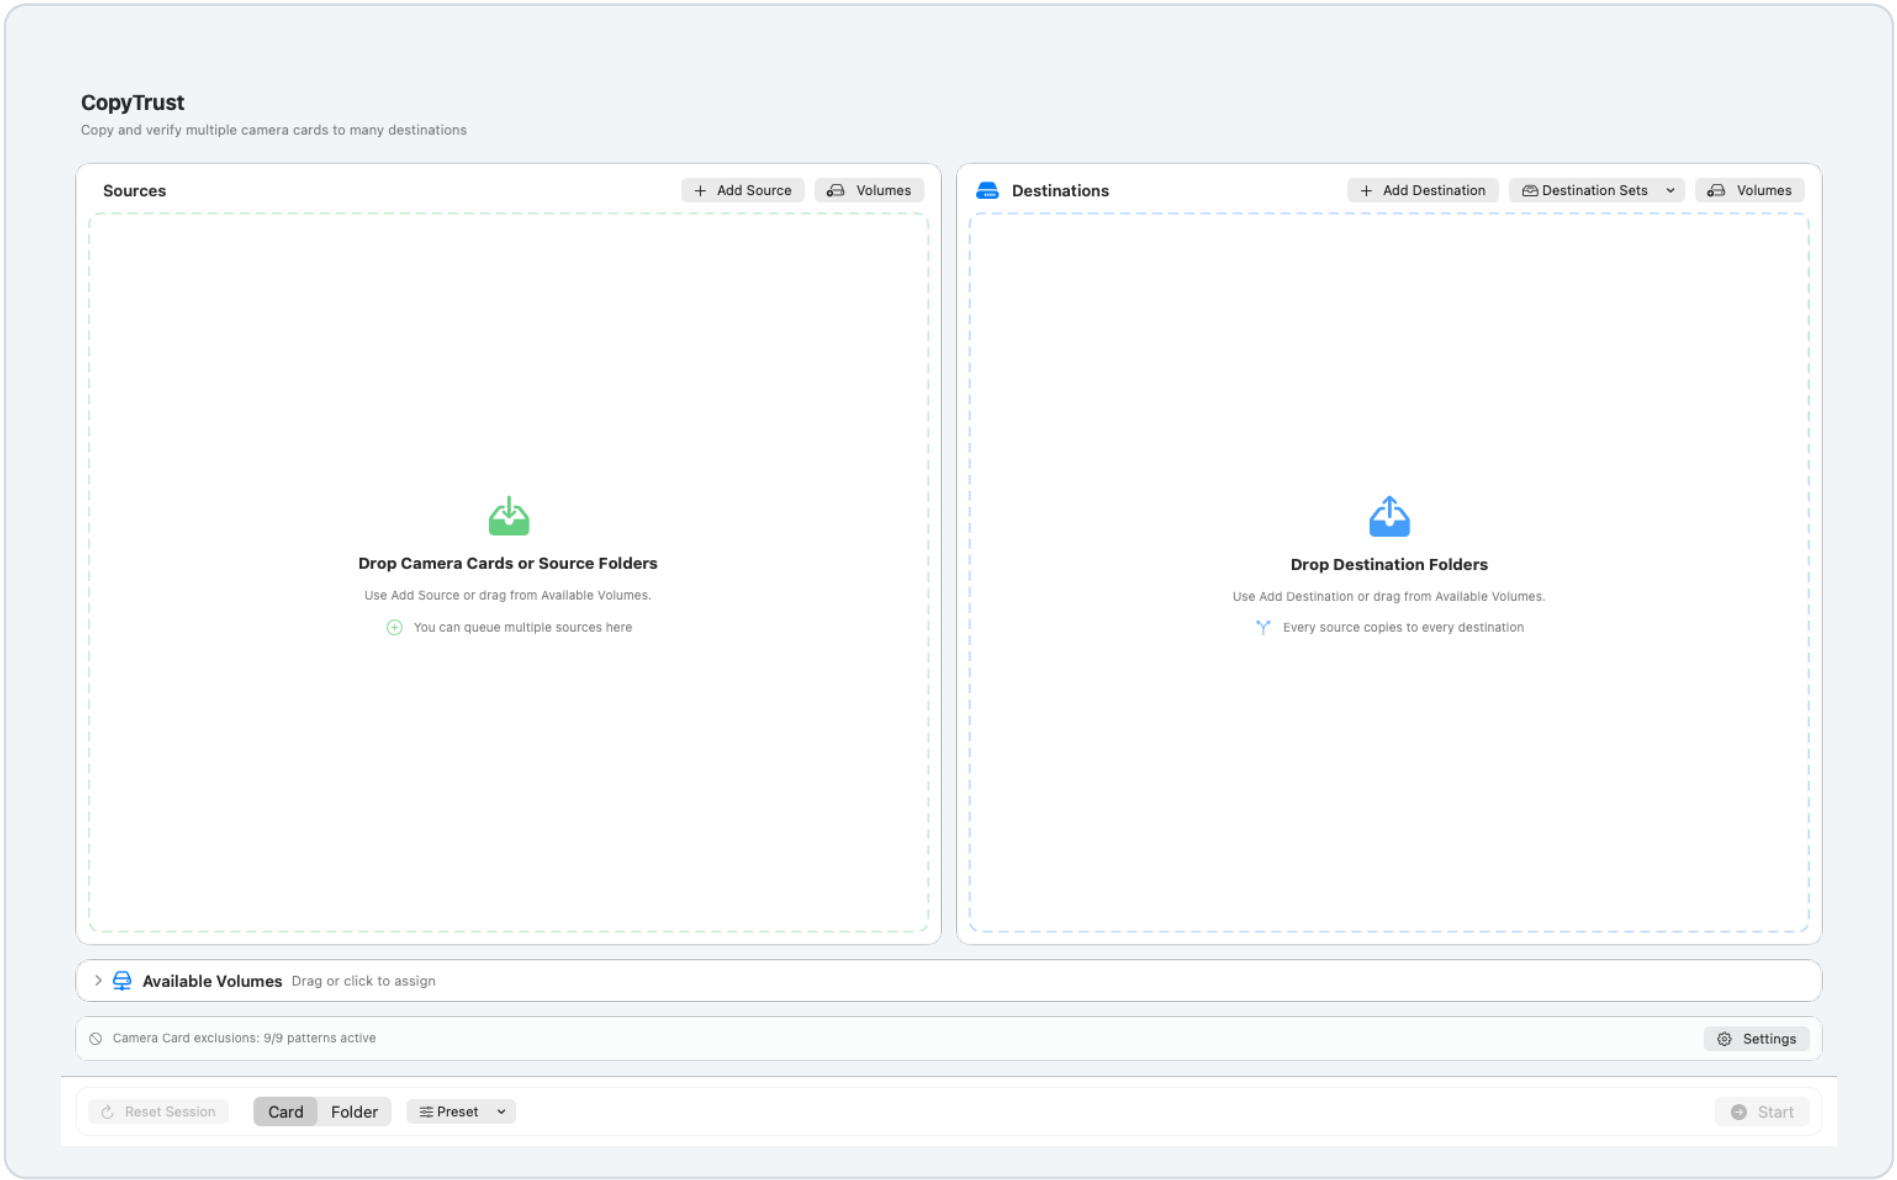


02 Prepare a direct session

Add one source and one or more destinations, confirm the naming preview, and check preflight before starting.

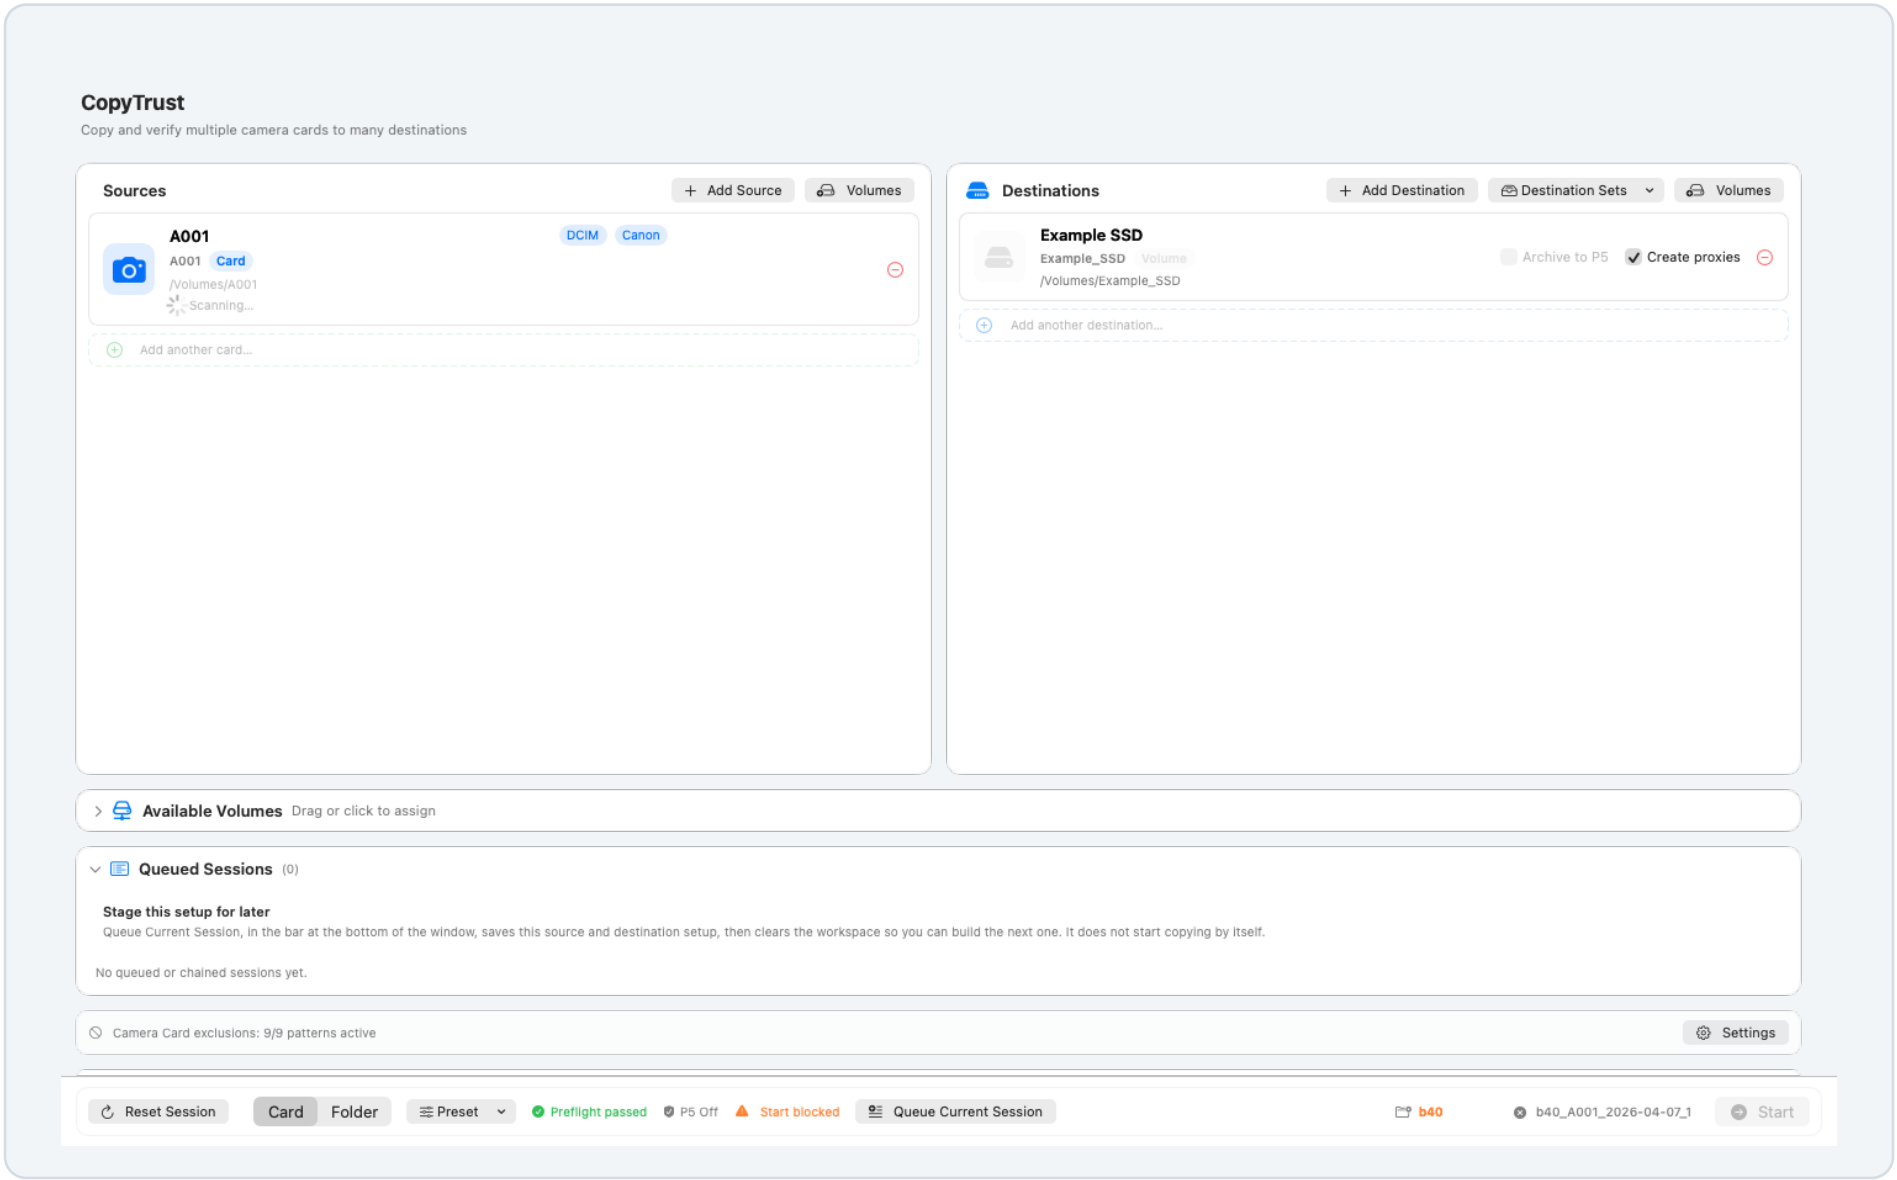


03 Stage mixed queued jobs

Queue separate Card and Folder jobs when different sources need different destinations or post-copy settings.

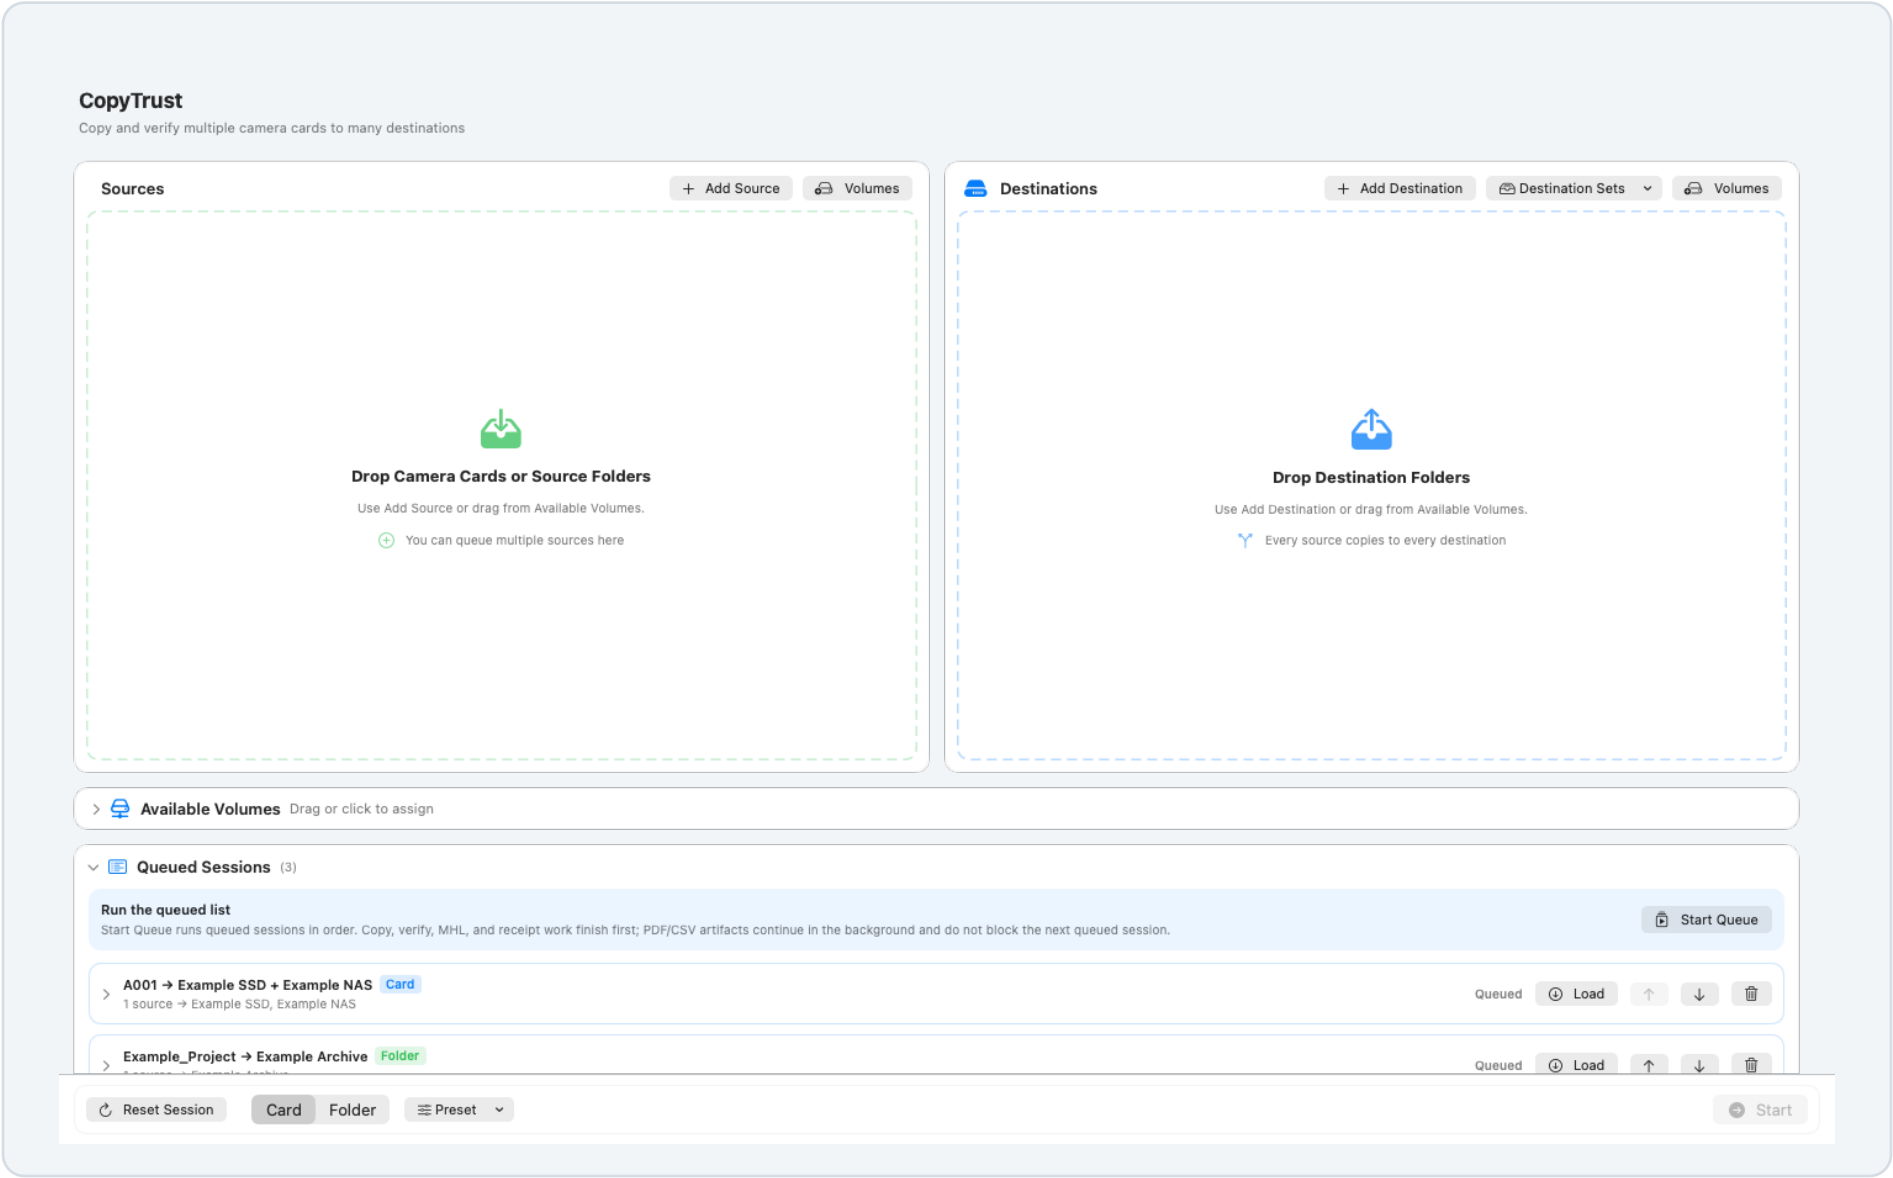


04 Build a relay chain

For A to B to C, order destinations fastest first, set the Copy switch to In series, then click Start so each downstream leg waits for verified upstream output.

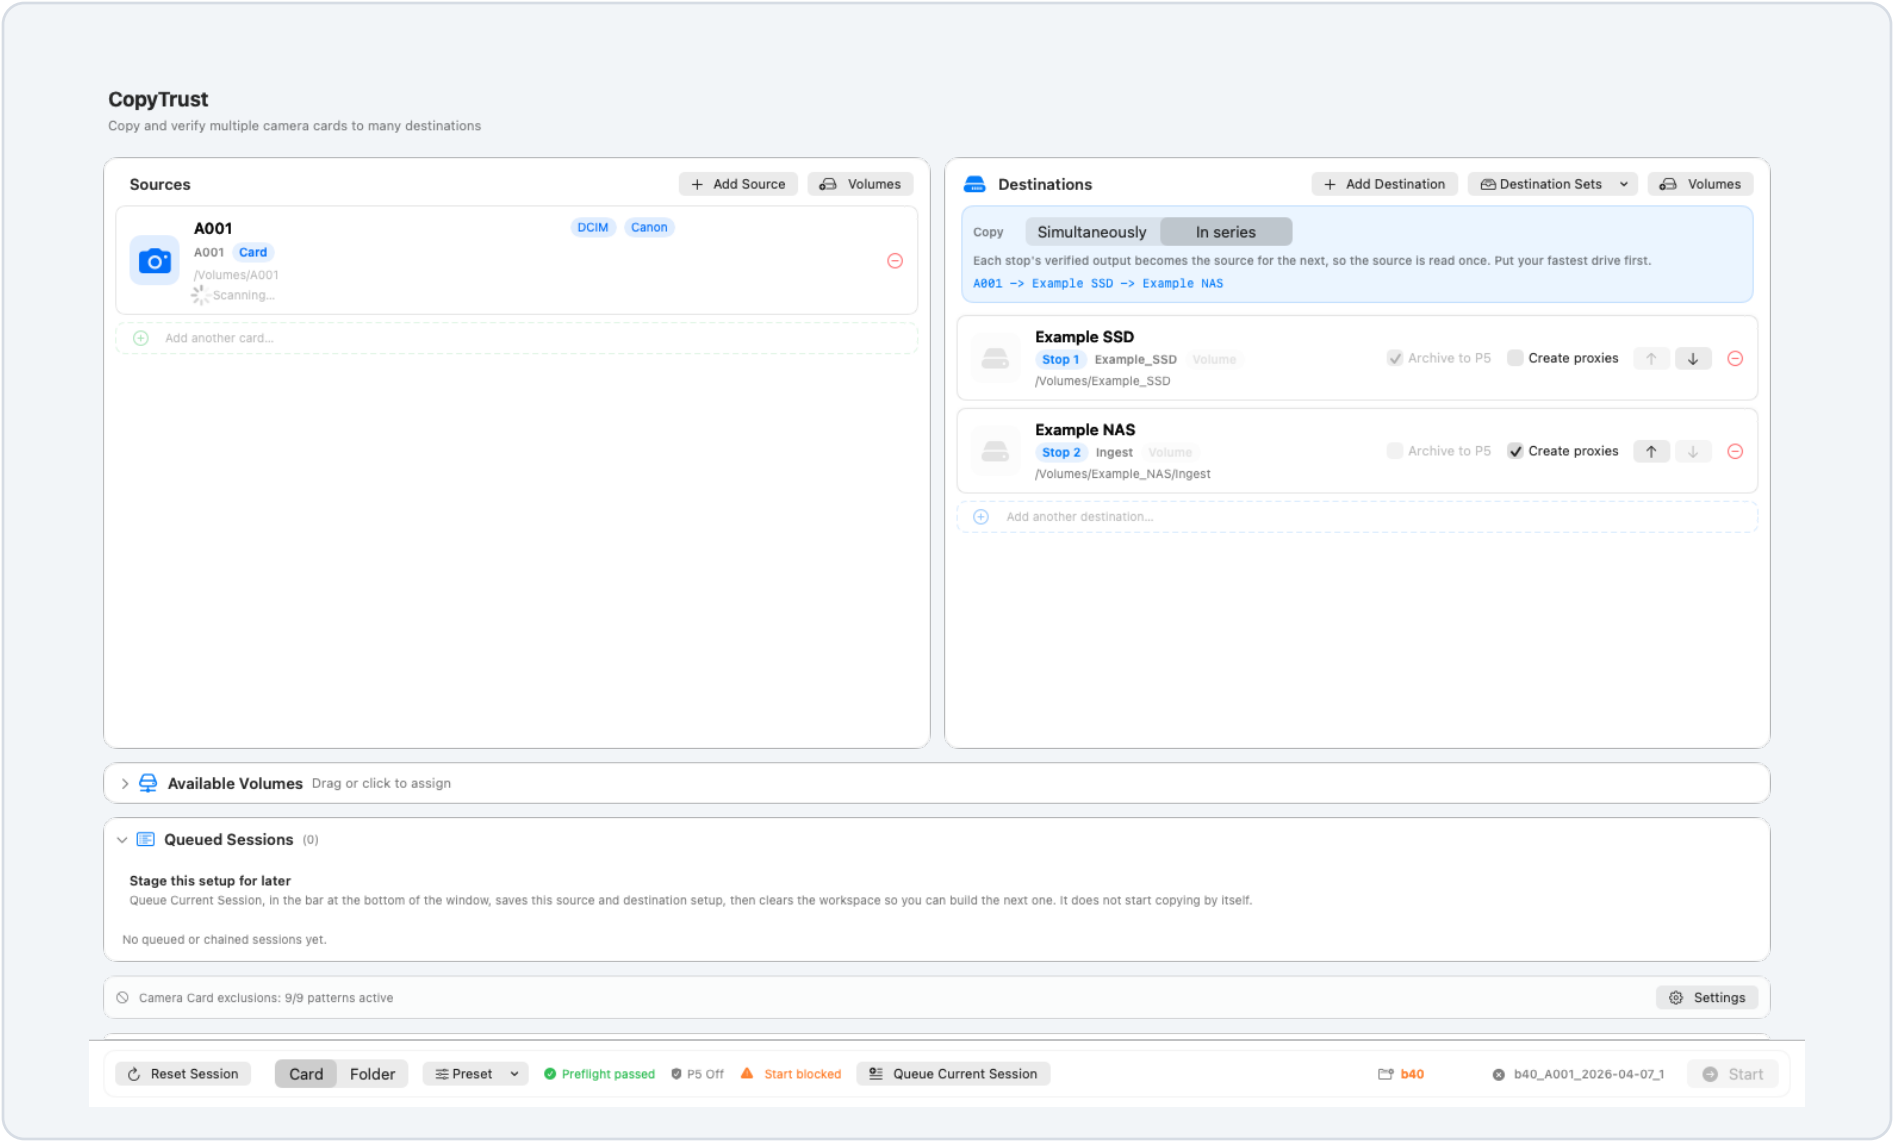

05 Set post-copy actions


Use the Post-Copy tab to configure confirmation, contact sheets, metadata, HTML trees, proxy media, and destination sorting for Card or Folder mode.

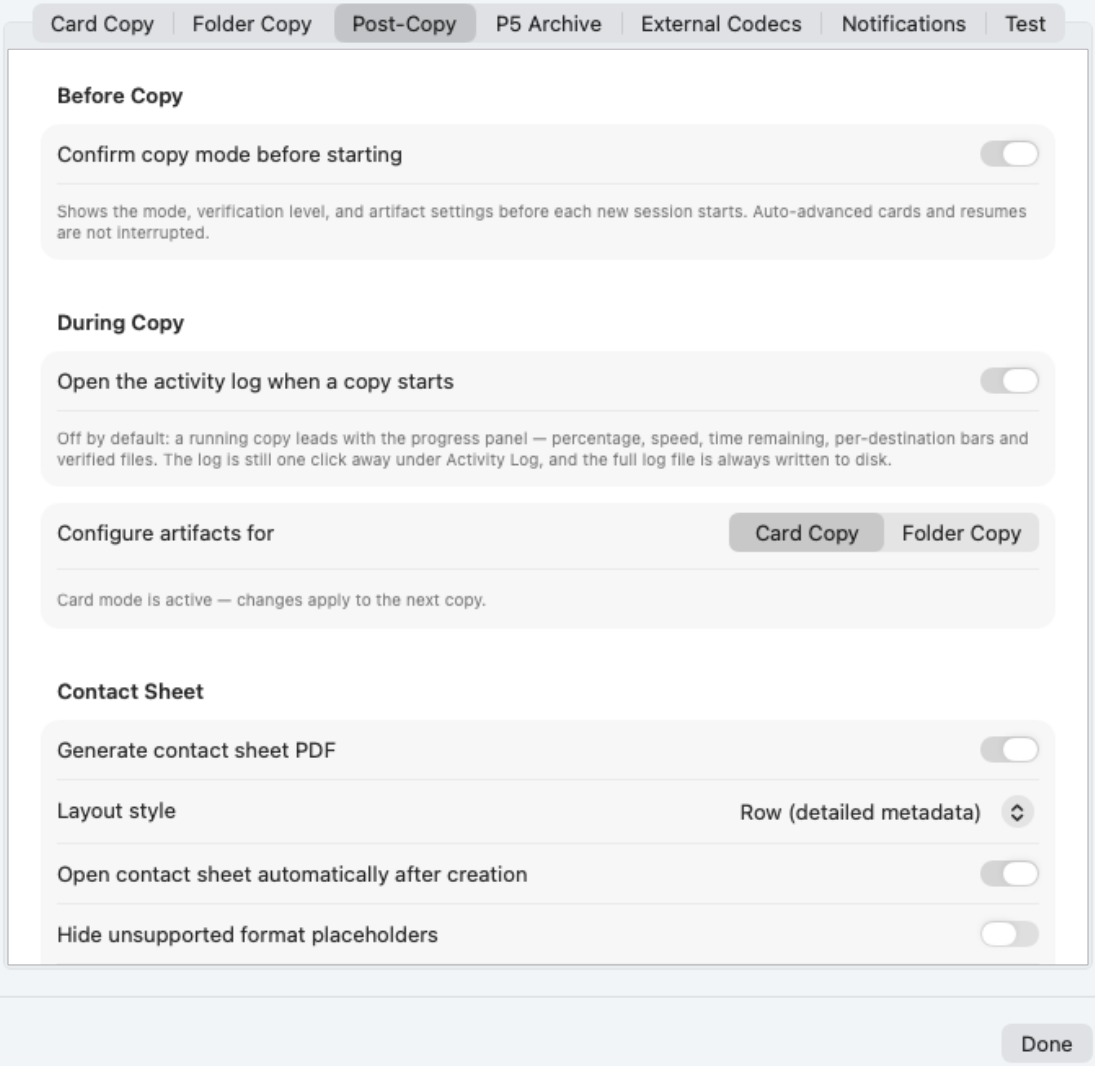

06

Pre-copy workflow review and durable evidence

See the whole topology and every destination choice before execution, then preserve the queued intent.

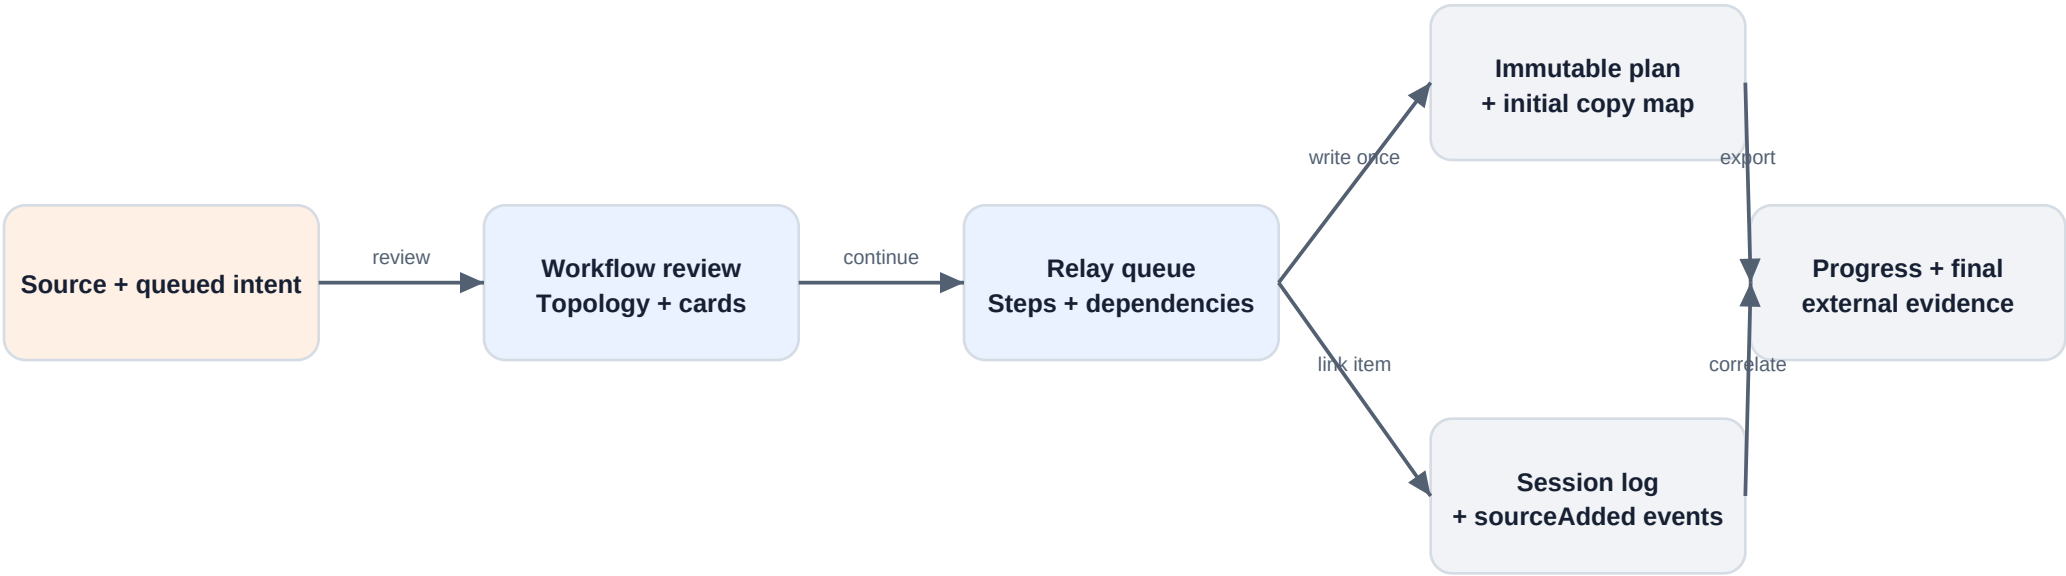


- Destination cards independently show verification, sorting, artifacts, proxies, and P5.
- The password-free plan records sequence/step IDs and dependencies before any relay leg runs.
- A later card appends a sourceAdded event and pending map without rewriting the initial plan.
- Rotation and reported color are probed before proxy scaling and encoding.

07

Direct copy: A to B

The simplest trusted ingest: one source, one independently verified destination.

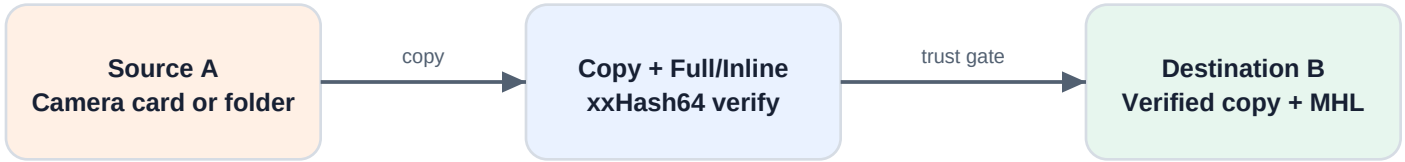


- Use Full or Inline when the result may later be archived to P5.
- Quick proves size/existence only and does not create hash-backed MHL evidence.

08

Fan-out copy: A to B and A to C

CopyTrust reads the same source into two independent verified destinations.

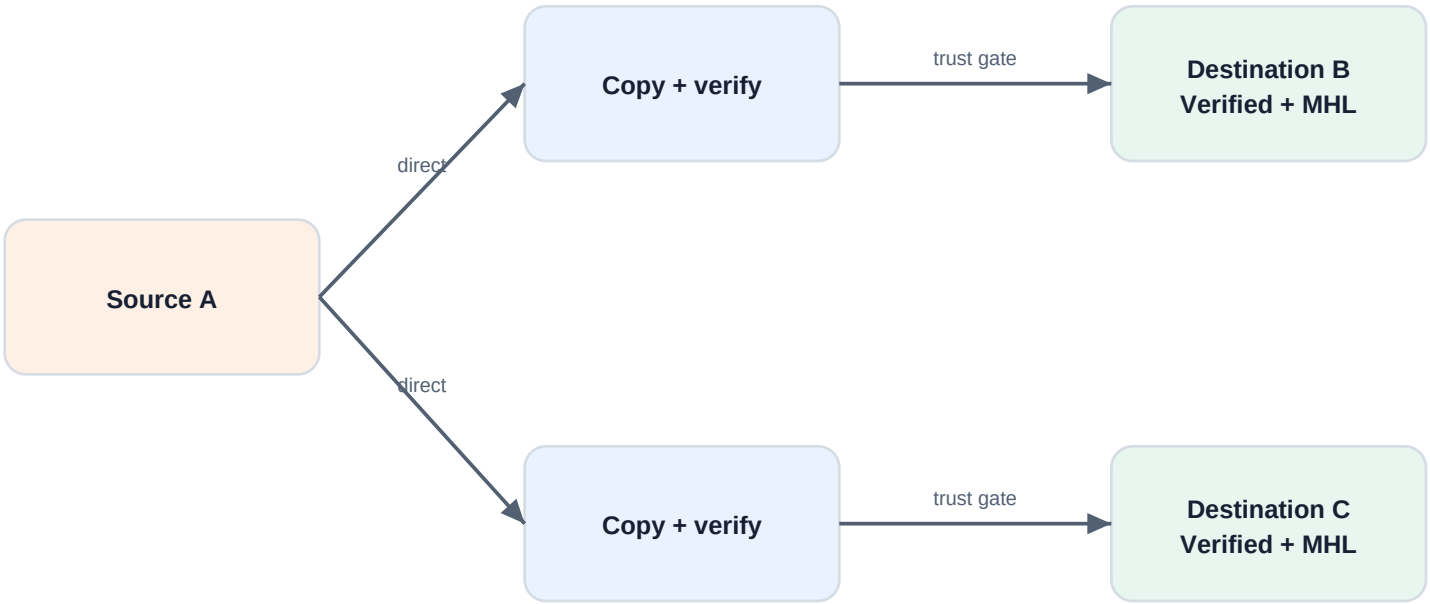


- B and C are separate results; inspect both destination verdicts and receipts.
- This protects the card with two copies without making either destination depend on the other.

09

Relay chain: A to B, then B to C


The verified output on B becomes the source for the downstream copy to C.

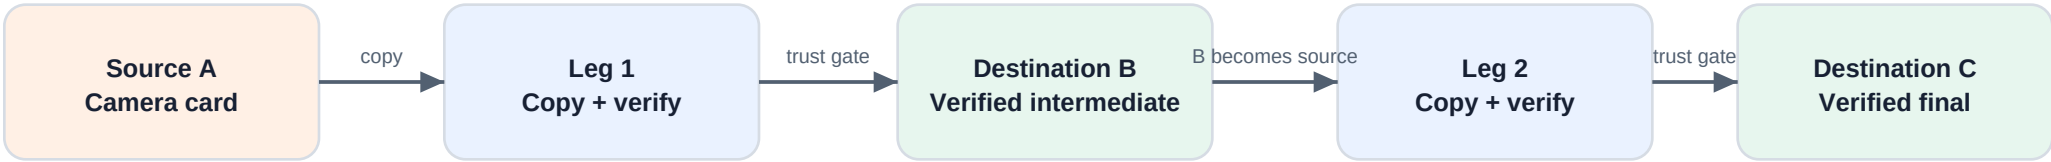

- Leg 2 waits until B is trust-complete; a failed Leg 1 blocks downstream copying.
- With Destination Sort enabled, CopyTrust currently sorts only the final relay destination.

10 Copy A to B, then archive B to P5


A verified destination can become the selected archive master after post-copy work finishes.

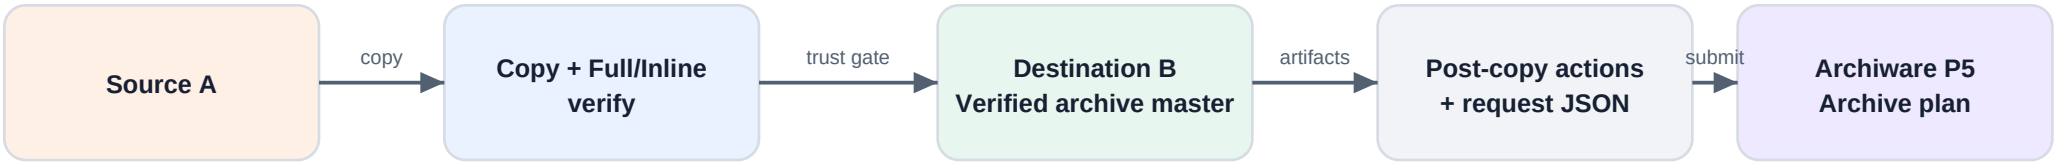

- The selected P5 client must see B at the same absolute path.
- Use a non-deleting plan; verify the job and searchable CT metadata in P5 Web.

11 Fan-out A to B and C, archive designated B


Keep two verified copies while sending only the chosen archive-master destination to P5.

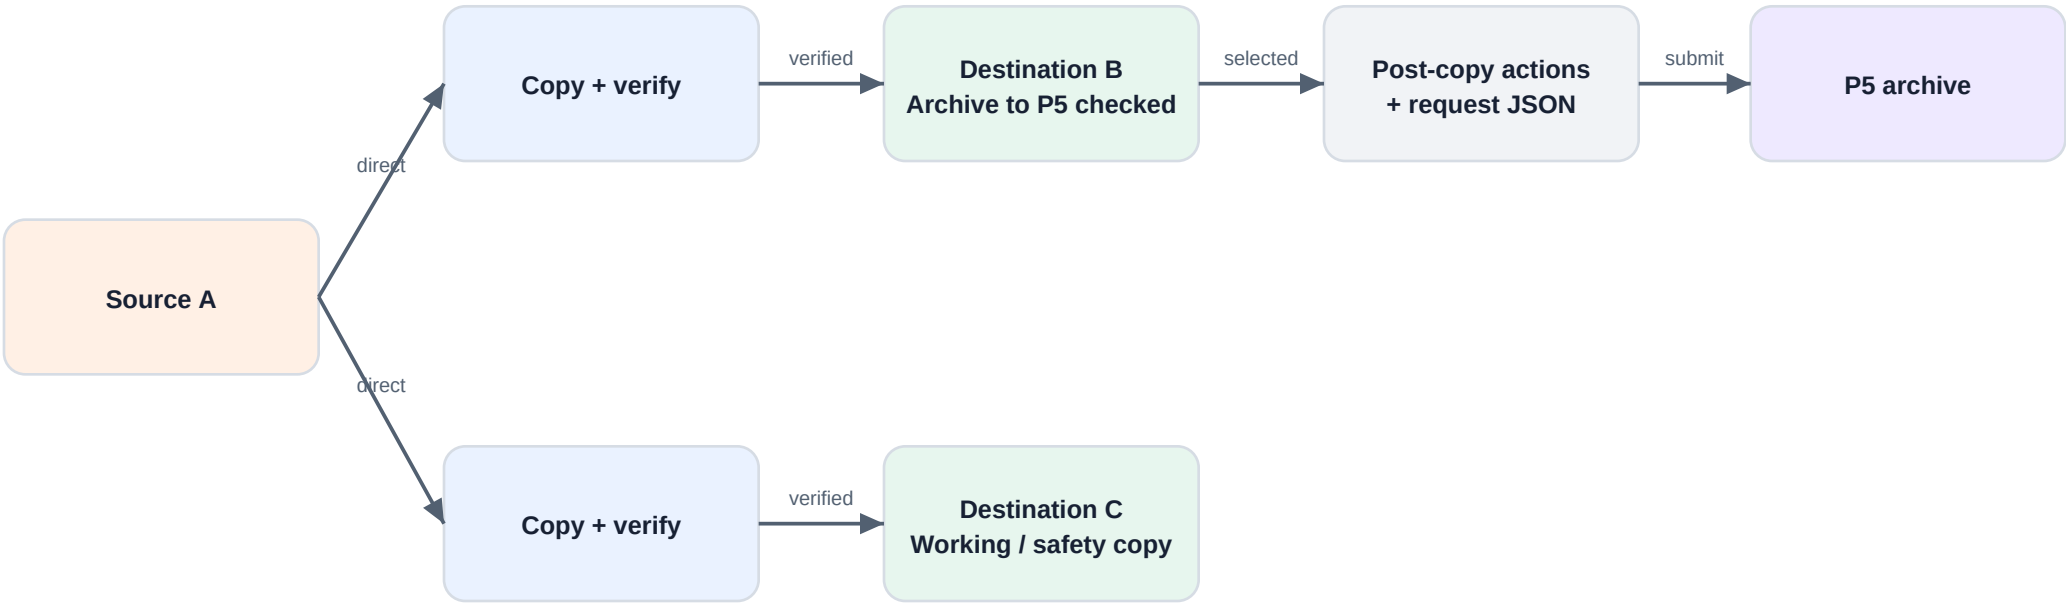

- Check Archive to P5 beside B; selecting another destination clears B.
- C remains an independent verified copy and is not silently included in B's archive request.

12 Naming, sorting, artifacts, proxies, and archive order


Trust-critical work is sealed before optional transformations and derivatives.

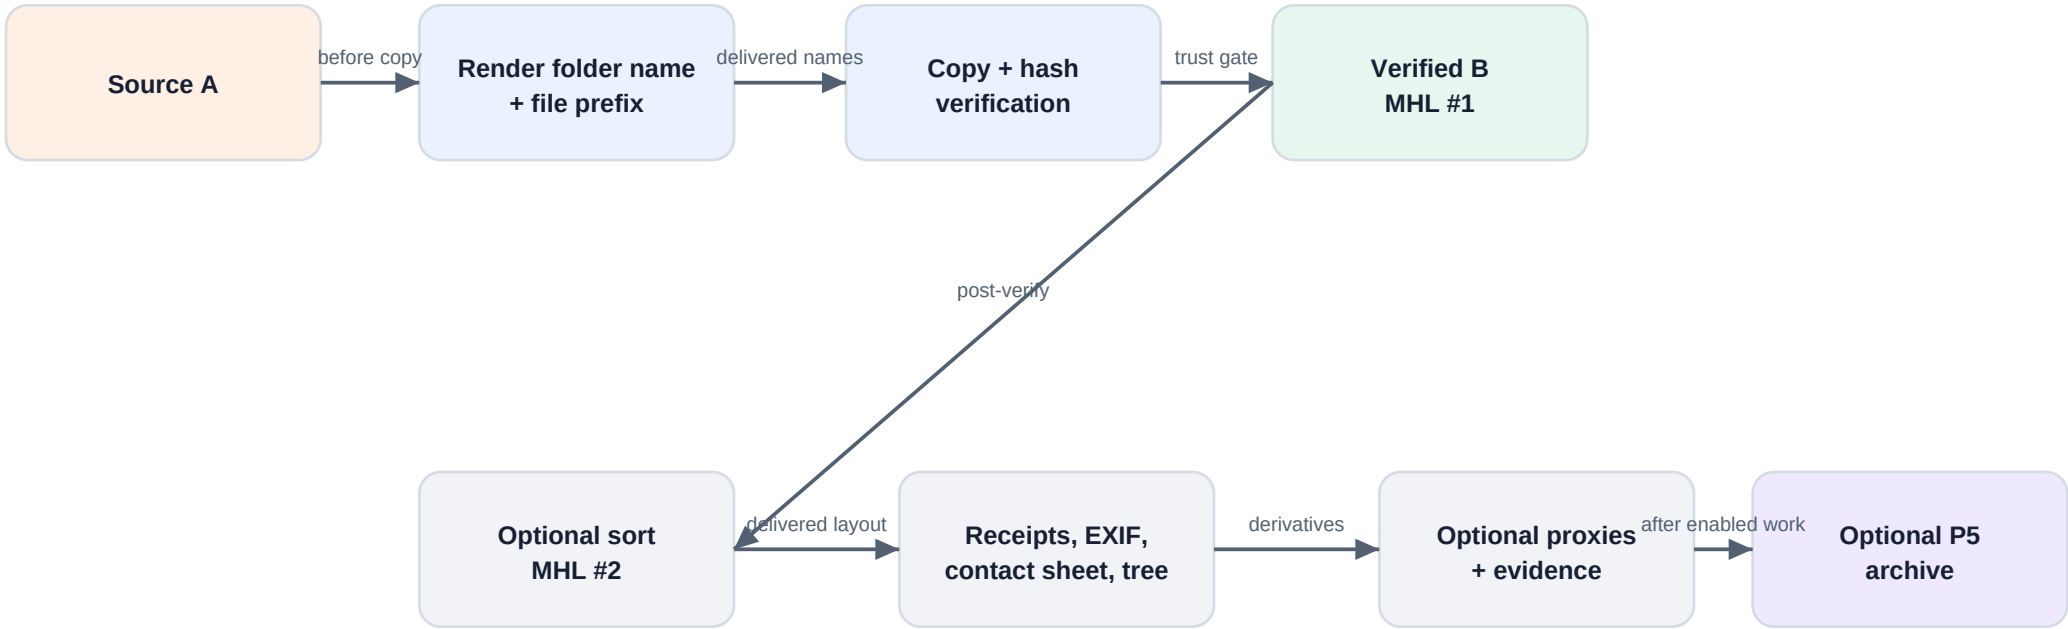

- Sorting remaps delivered paths and writes a sorted-layout MHL while preserving source-layout evidence.
- Artifact, proxy, or P5 failure never upgrades or downgrades the verified-original result.

13 Offline P5 handoff, restore, and re-verification

The password-free request preserves intent when P5 is unavailable and the MHL closes the restore loop.

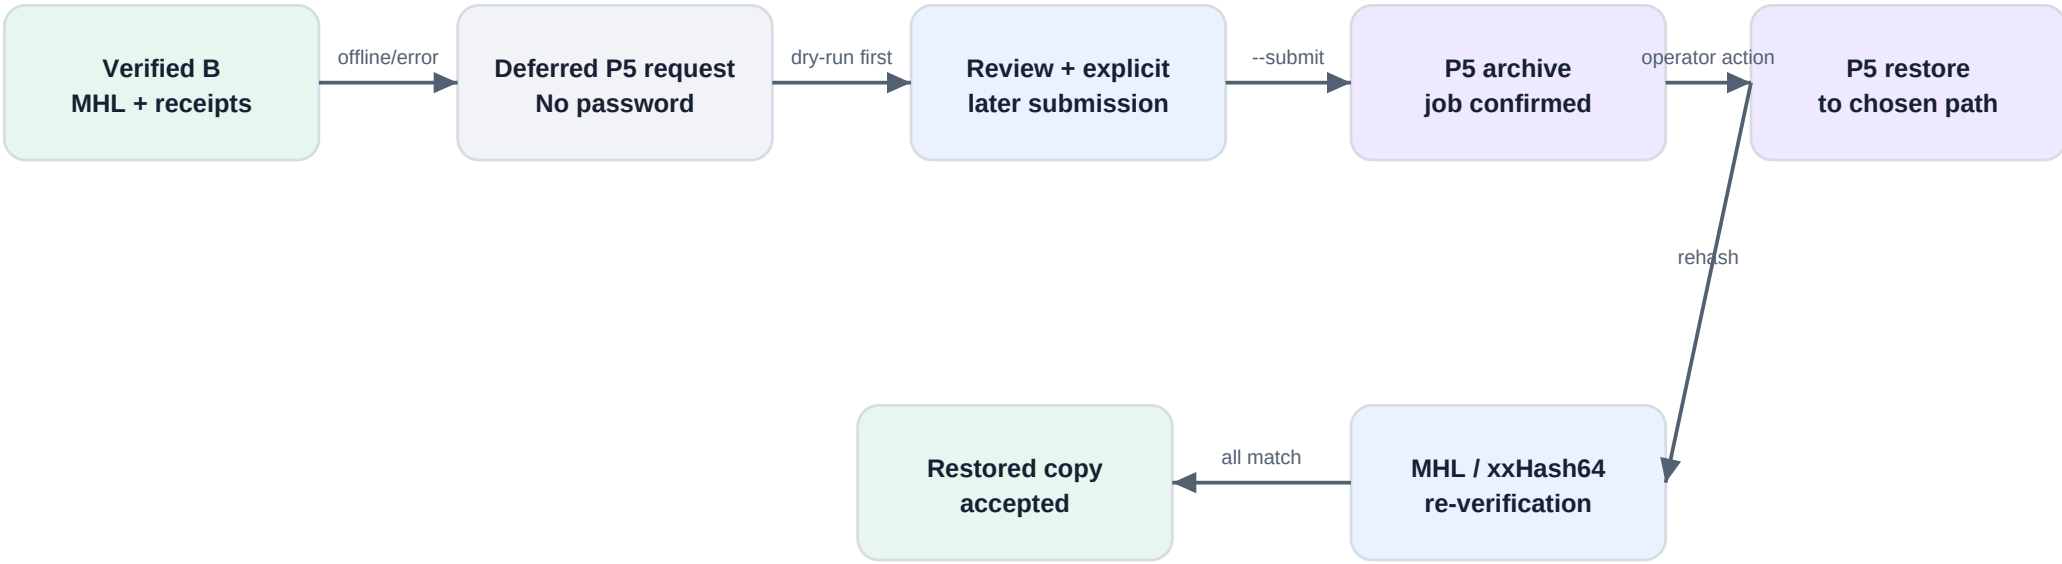

- The JSON records paths, hashes, metadata, target hints, job state, and actionable errors.
- Archive presence is not restore proof; accept restored media only after hash verification.