

CopyTrust

Illustrated Workflow Guide

A visual walkthrough of copy modes, direct sessions, mixed queues, relay chains, post-copy actions, and the verified P5 archive handoff.

CopyTrust 2.7 operator workflow

Crash-report privacy

CopyTrust is configured not to capture or transmit media paths or private information through Sentry. Collection features are disabled and an on-device filter removes media paths and filenames, P5 details, credentials, and operator/client information before upload.

Generated from repository screenshots and workflow scenario definitions

Choose a copy mode

Select Card for camera-card ingest or Folder for general folder copies; each mode keeps an independent settings profile.

CopyTrust
Copy and verify multiple camera cards to many destinations

Sources

+ Add Source

Volumes


Drop Camera Cards or Source Folders
Use Add Source or drag from Available Volumes.
 You can queue multiple sources here

Destinations

+ Add Destination

Destination Sets

Volumes


Drop Destination Folders
Use Add Destination or drag from Available Volumes.
 Every source copies to every destination

>  Available Volumes

 Drag or click to assign

Camera Card exclusions: 9/9 patterns active

Settings

Reset Session

Card Folder

Preset

Start

Prepare a direct session

Add one source and one or more destinations, confirm the naming preview, and check preflight before starting.

CopyTrust

Copy and verify multiple camera cards to many destinations

▼ Sources

+ Add Source

Volumes

 **A001**

A001

Card

DCIM

Canon

/Volumes/A001

Scanning...

⊖

+ Add another card...

 **Example SSD**

Example_SSD

Volume

Archive to P5

☒ Create proxies

/Volumes/Example_SSD

+ Add another destination...

> Available Volumes

Drag or click to assign

▼ Queued Sessions (0)

Stage this setup for later

Queue Current Session saves this source and destination setup, then clears the workspace so you can build the next one. It does not start copying by itself.

Queue Current Session

No queued or chained sessions yet.

Camera Card exclusions: 9/9 patterns active

Settings

> Activity Log

Reset Session

Card

Folder

Preset

Preflight passed

P5 On

Start blocked

Queue Current Session

272b30

272b30_A001_2026-04-07_1

Start

CopyTrust 2.7 illustrated workflow guide

Page 3 of 14

Stage mixed queued jobs

Queue separate Card and Folder jobs when different sources need different destinations or post-copy settings.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source

Volumes


Drop Camera Cards or Source Folders
Use Add Source or drag from Available Volumes.
 You can queue multiple sources here

Destinations

+ Add Destination

Destination Sets

Volumes


Drop Destination Folders
Use Add Destination or drag from Available Volumes.
 Every source copies to every destination

> Available Volumes Drag or click to assign

Queued Sessions (3)

Run the queued list

Start Queue Queue Load Up Down Trash

A001 → Example SSD + Example NAS Card
1 source → Example SSD, Example NAS

Example_Project → Example Archive Folder
1 source → Example Archive

B002 → Example NAS Card
1 source → Example NAS

Camera Card exclusions: 9/9 patterns active Settings

Reset Session Card Folder Preset Start

Build a relay chain

For A to B to C, order destinations fastest first, set the Copy switch to In series, then click Start so each downstream leg waits for verified upstream output.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

A001

DCIM

Canon

A001

Card

/Volumes/A001

Scanning...

Add another card...

Destinations

Copy

Simultaneously

In series

Each stop's verified output becomes the source for the next, so the source is read once. Put your fastest drive first.

A001 -> Example SSD -> Example NAS

Example SSD

Stop 1

Example_SSD

Volume

Archive to P5

Create proxies

↑

↓

⊖

/Volumes/Example_SSD

Example NAS

Stop 2

Ingest

Volume

Archive to P5

Create proxies

↑

↓

⊖

/Volumes/Example_NAS/Ingest

Add another destination...

Available Volumes

Drag or click to assign

Queued Sessions

(0)

Stage this setup for later

Queue Current Session saves this source and destination setup, then clears the workspace so you can build the next one. It does not start copying by itself.

Queue Current Session

No queued or chained sessions yet.

Camera Card exclusions: 9/9 patterns active

Settings

Activity Log

Reset Session

Card

Folder

Preset

Preflight passed

P5 On

Start blocked

Queue Current Session

272b30

272b30_A001_2026-04-07_1

Start

CopyTrust 2.7 illustrated workflow guide

Page 5 of 14

Set post-copy actions

Use the Post-Copy tab to configure confirmation, contact sheets, metadata, HTML trees, proxy media, and destination sorting for Card or Folder mode.

The screenshot shows the 'Post-Copy' tab in the CopyTrust 2.7 settings window. The window has a title bar with tabs: Card Copy, Folder Copy, Post-Copy (selected), P5 Archive, External Codecs, Notifications, and Test. The main content area is divided into three sections: 'Before Copy', 'Contact Sheet', and 'EXIF / Media Metadata CSV'. The 'Before Copy' section has a toggle for 'Confirm copy mode before starting' (disabled) and a description: 'Shows the mode, verification level, and artifact settings before each new session starts. Auto-advanced cards and resumes are not interrupted.' The 'Configure artifacts for' section has two buttons: 'Card Copy' (selected) and 'Folder Copy'. Below it, a status message says 'Card mode is active — changes apply to the next copy.' The 'Contact Sheet' section has a toggle for 'Generate contact sheet PDF' (disabled), a 'Layout style' dropdown set to 'Row (detailed metadata)', a toggle for 'Open contact sheet automatically after creation' (disabled), a toggle for 'Hide unsupported format placeholders' (disabled), and a 'Split large contact sheets' dropdown set to 'Every 250 files'. A detailed note explains that cards with more files than the limit are split into numbered PDFs (part1of3, part2of3, ...). The 'EXIF / Media Metadata CSV' section is currently empty. A 'Done' button is at the bottom right.

Card Copy | Folder Copy | **Post-Copy** | P5 Archive | External Codecs | Notifications | Test

Before Copy

Confirm copy mode before starting ☐

Shows the mode, verification level, and artifact settings before each new session starts. Auto-advanced cards and resumes are not interrupted.

Configure artifacts for **Card Copy** | Folder Copy

Card mode is active — changes apply to the next copy.

Contact Sheet

Generate contact sheet PDF ☐

Layout style Row (detailed metadata)

Open contact sheet automatically after creation ☐

Hide unsupported format placeholders ☐

Split large contact sheets Every 250 files


Cards with more files than the limit are split into numbered PDFs (part1of3, part2of3, ...). When multiple PDFs are created, auto-open reveals them in Finder instead of opening each one.

EXIF / Media Metadata CSV

Done

Pre-copy workflow review and durable evidence


See the whole topology and every destination choice before execution, then preserve the queued intent.

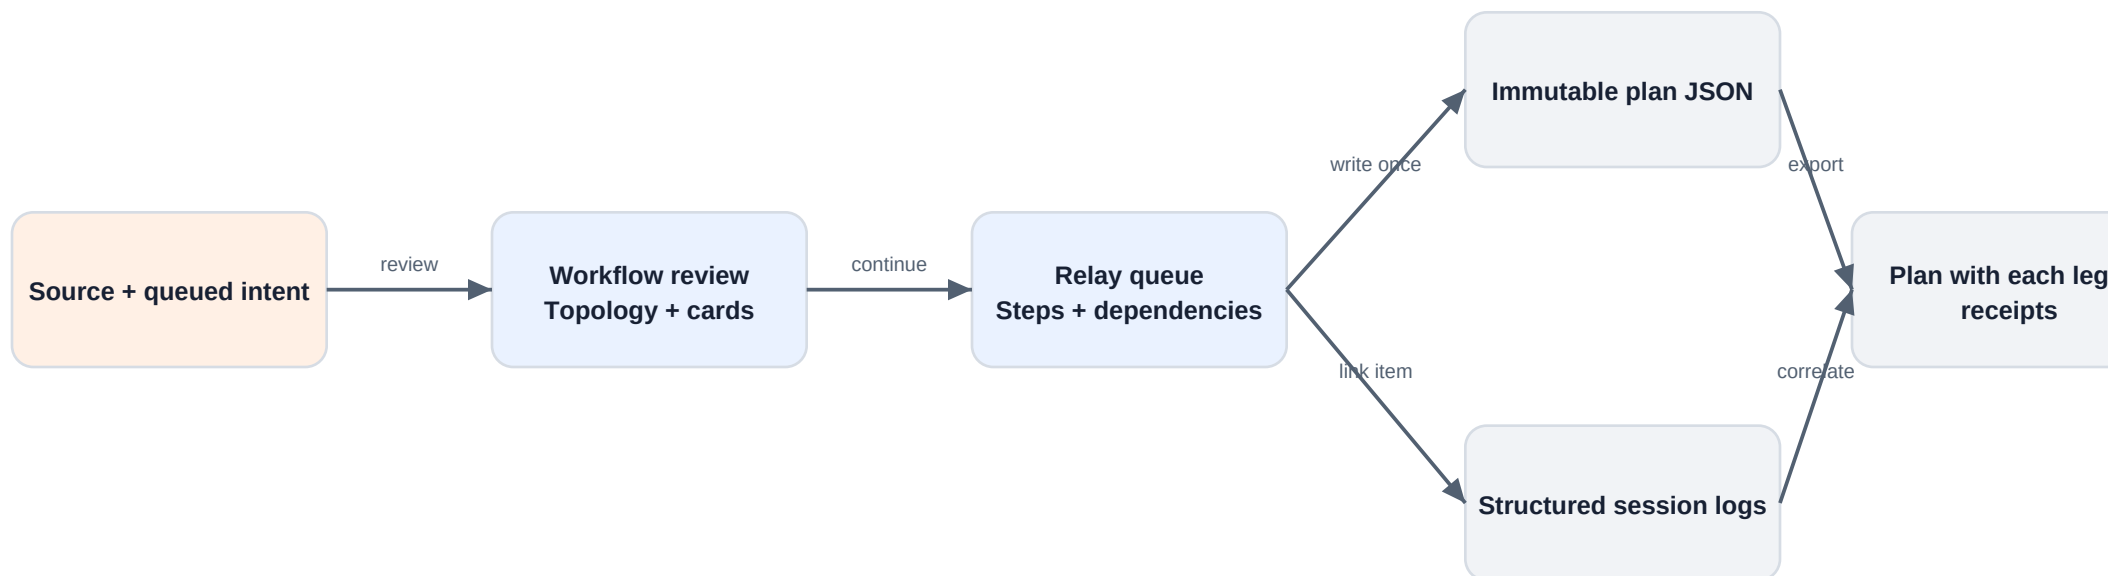

- Destination cards independently show verification, sorting, artifacts, proxies, and P5.
- The password-free plan records sequence/step IDs and dependencies before any relay leg runs.
- Rotation and reported color are probed before proxy scaling and encoding.

Direct copy: A to B


The simplest trusted ingest: one source, one independently verified destination.

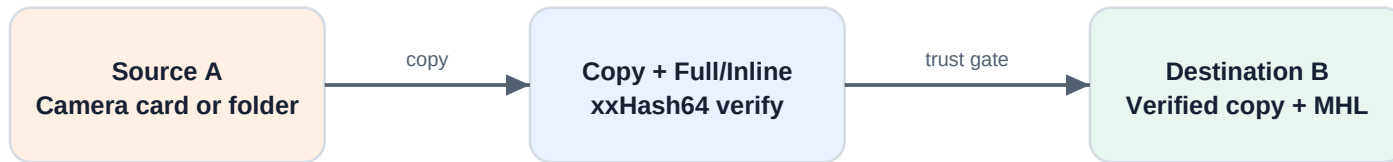

- Use Full or Inline when the result may later be archived to P5.
- Quick proves size/existence only and does not create hash-backed MHL evidence.

Fan-out copy: A to B and A to C


CopyTrust reads the same source into two independent verified destinations.

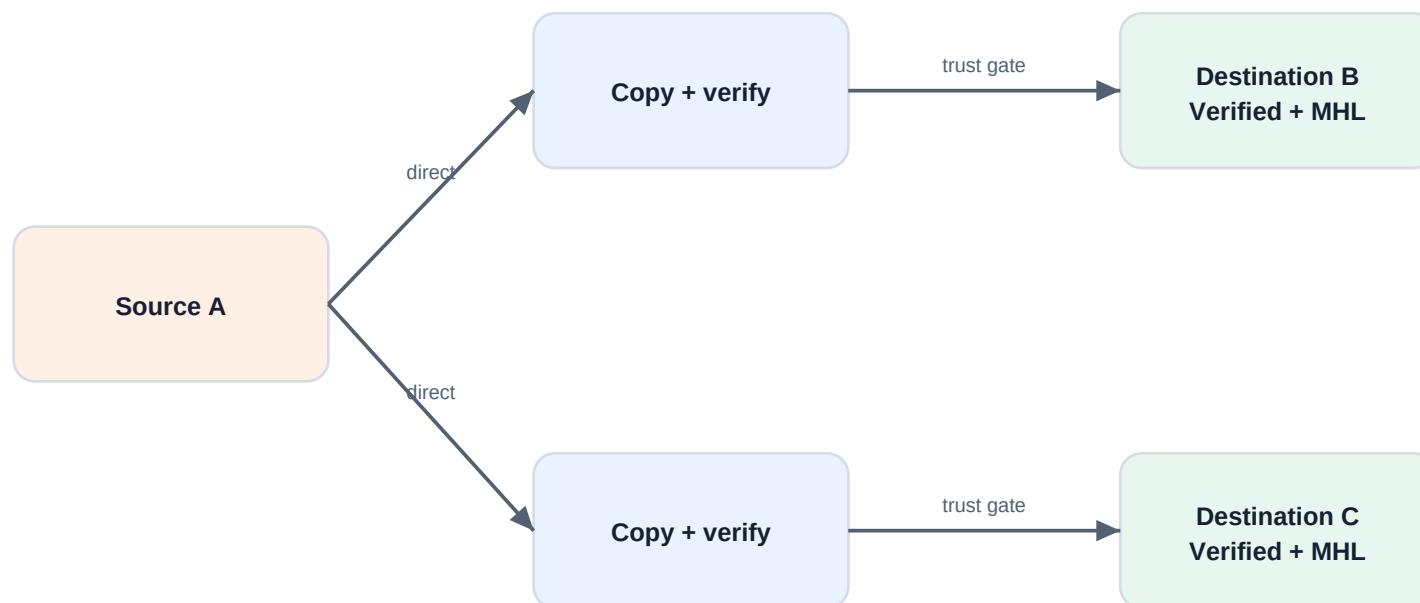

- B and C are separate results; inspect both destination verdicts and receipts.
- This protects the card with two copies without making either destination depend on the other.

Relay chain: A to B, then B to C


The verified output on B becomes the source for the downstream copy to C.

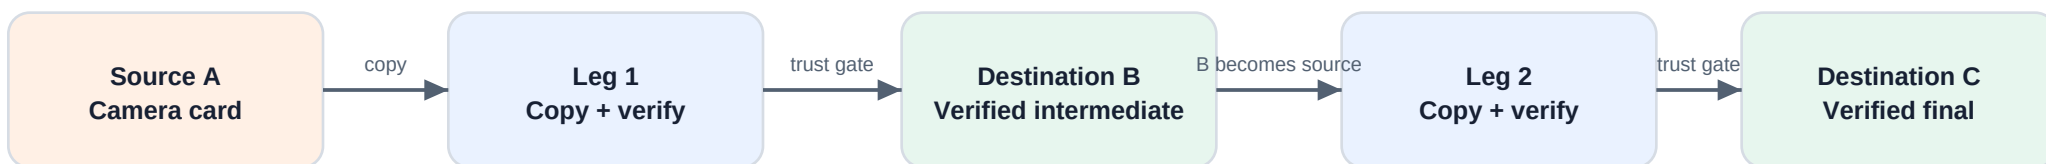

- Leg 2 waits until B is trust-complete; a failed Leg 1 blocks downstream copying.
- With Destination Sort enabled, CopyTrust currently sorts only the final relay destination.

Copy A to B, then archive B to P5


A verified destination can become the selected archive master after post-copy work finishes.

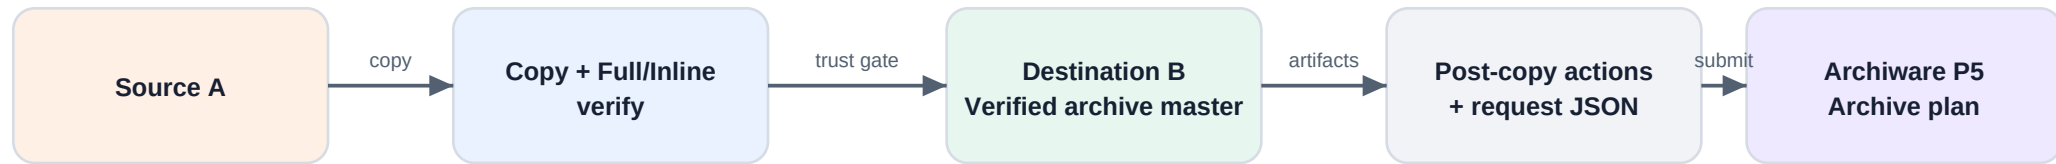

- The selected P5 client must see B at the same absolute path.
- Use a non-deleting plan; verify the job and searchable CT metadata in P5 Web.

Fan-out A to B and C, archive designated B


Keep two verified copies while sending only the chosen archive-master destination to P5.

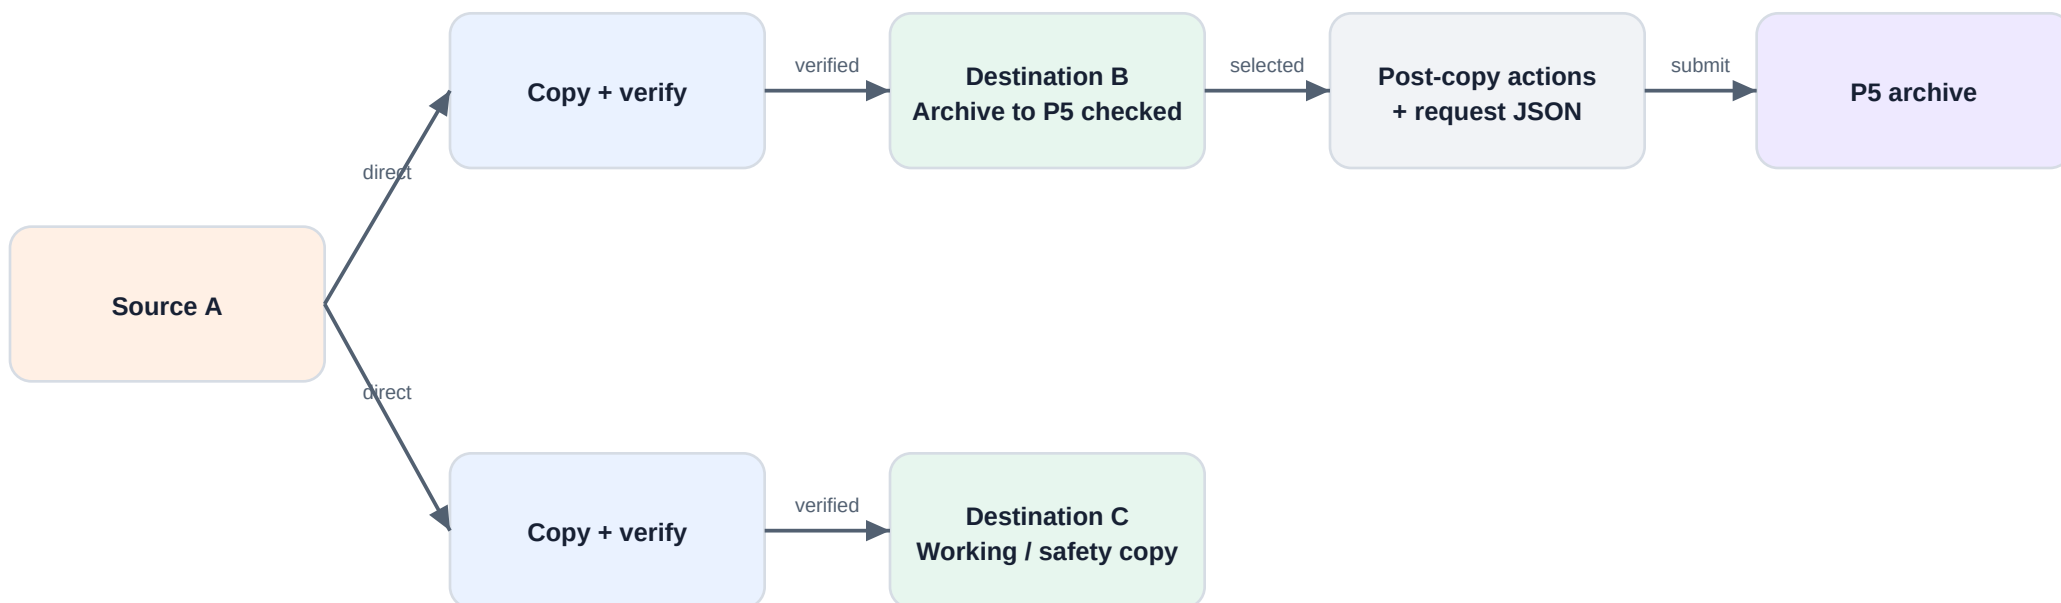

- Check Archive to P5 beside B; selecting another destination clears B.
- C remains an independent verified copy and is not silently included in B's archive request.

Naming, sorting, artifacts, proxies, and archive order


Trust-critical work is sealed before optional transformations and derivatives.

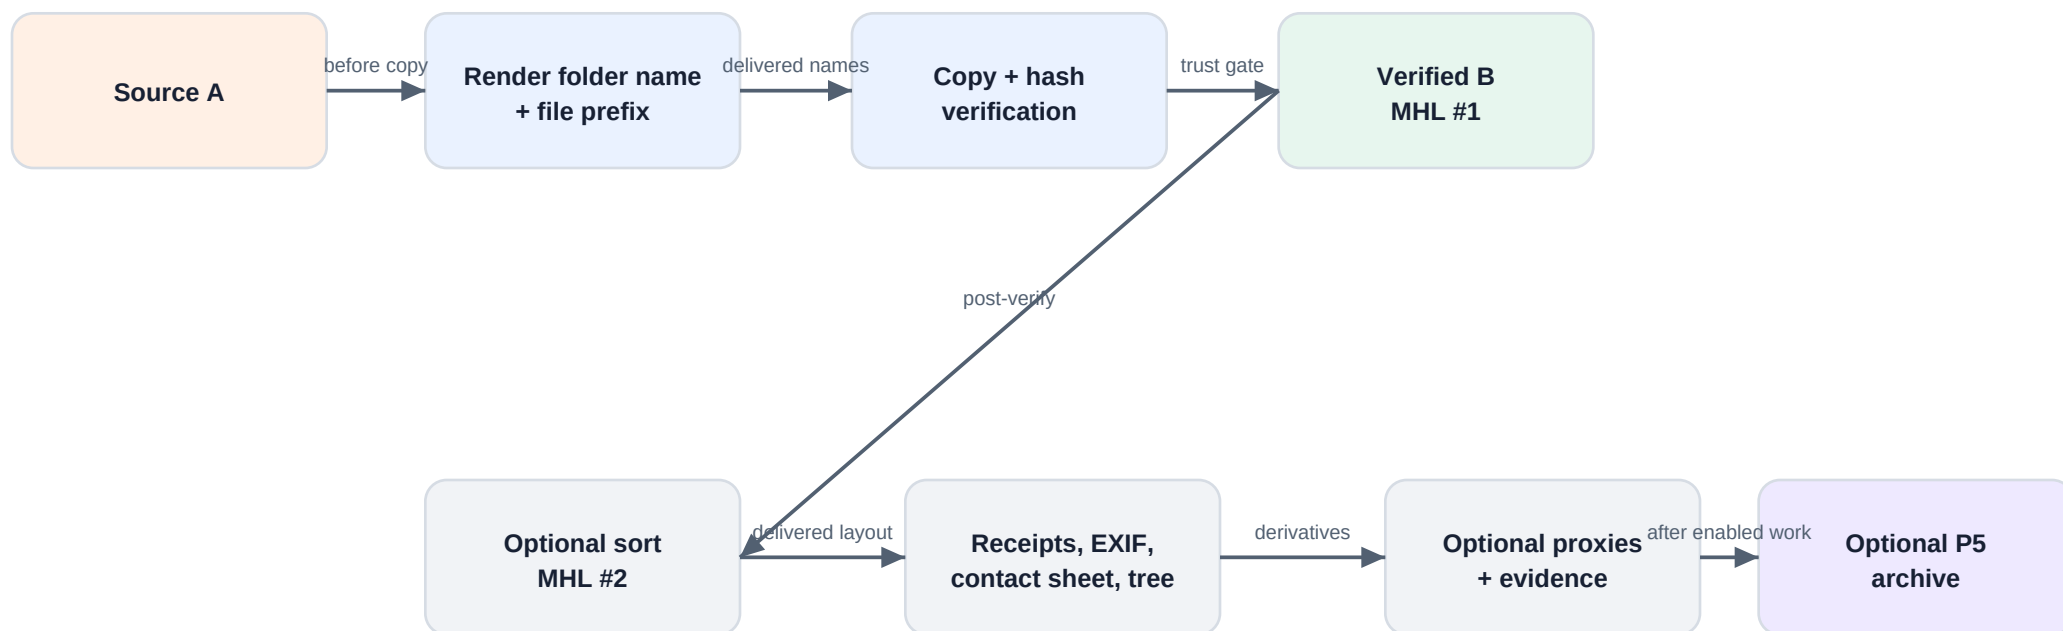

- Sorting remaps delivered paths and writes a sorted-layout MHL while preserving source-layout evidence.
- Artifact, proxy, or P5 failure never upgrades or downgrades the verified-original result.

Offline P5 handoff, restore, and re-verification

The password-free request preserves intent when P5 is unavailable and the MHL closes the restore loop.

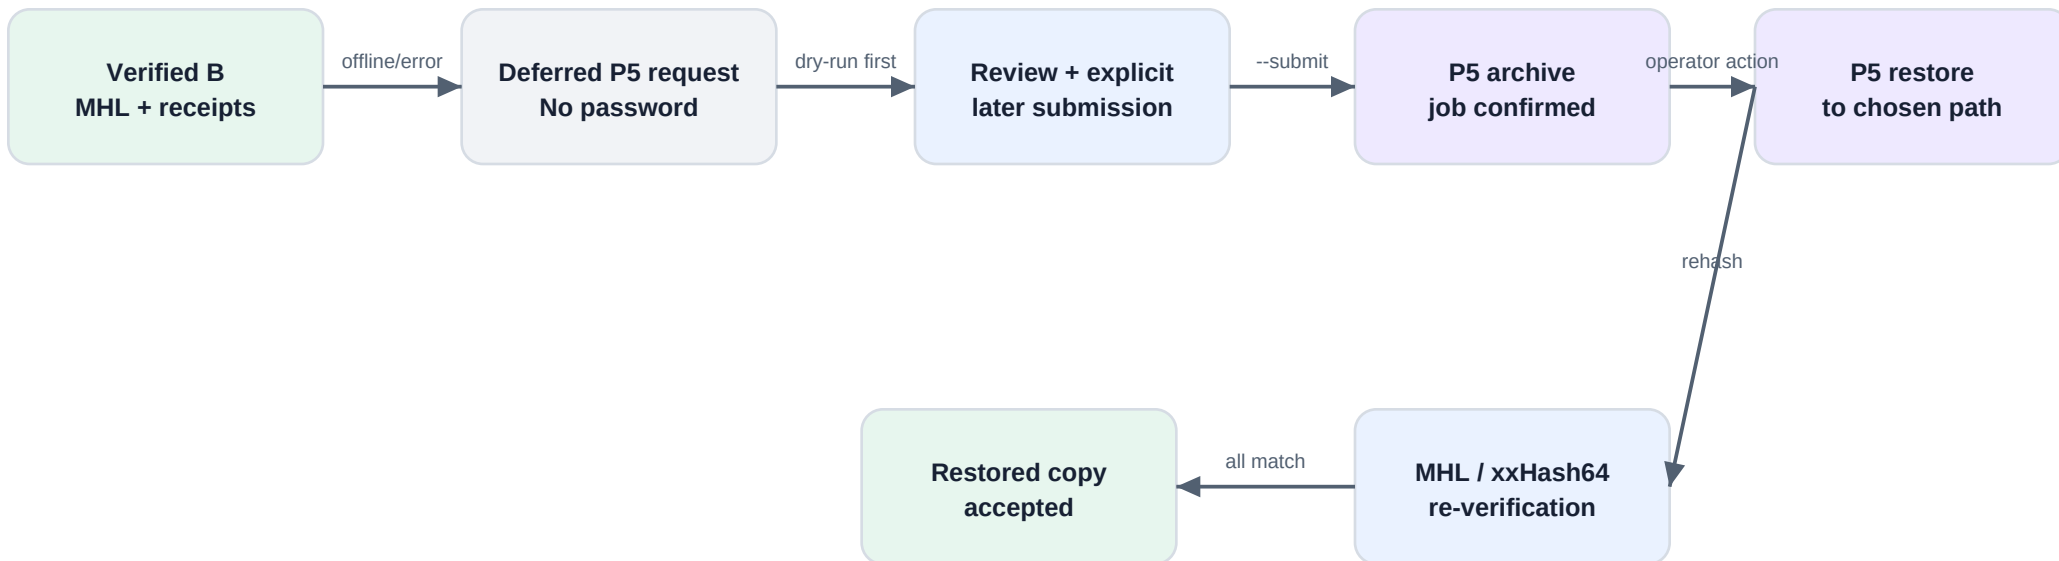

- The JSON records paths, hashes, metadata, target hints, job state, and actionable errors.
- Archive presence is not restore proof; accept restored media only after hash verification.