

CopyTrust


Illustrated Workflow Guide

A visual walkthrough of copy modes, direct sessions, mixed queues, relay chains, post-copy actions, and the verified P5 archive handoff.

CopyTrust 2.7 operator workflow

Choose a copy mode

Select Card for camera-card ingest or Folder for general folder copies; each mode keeps an independent settings profile.

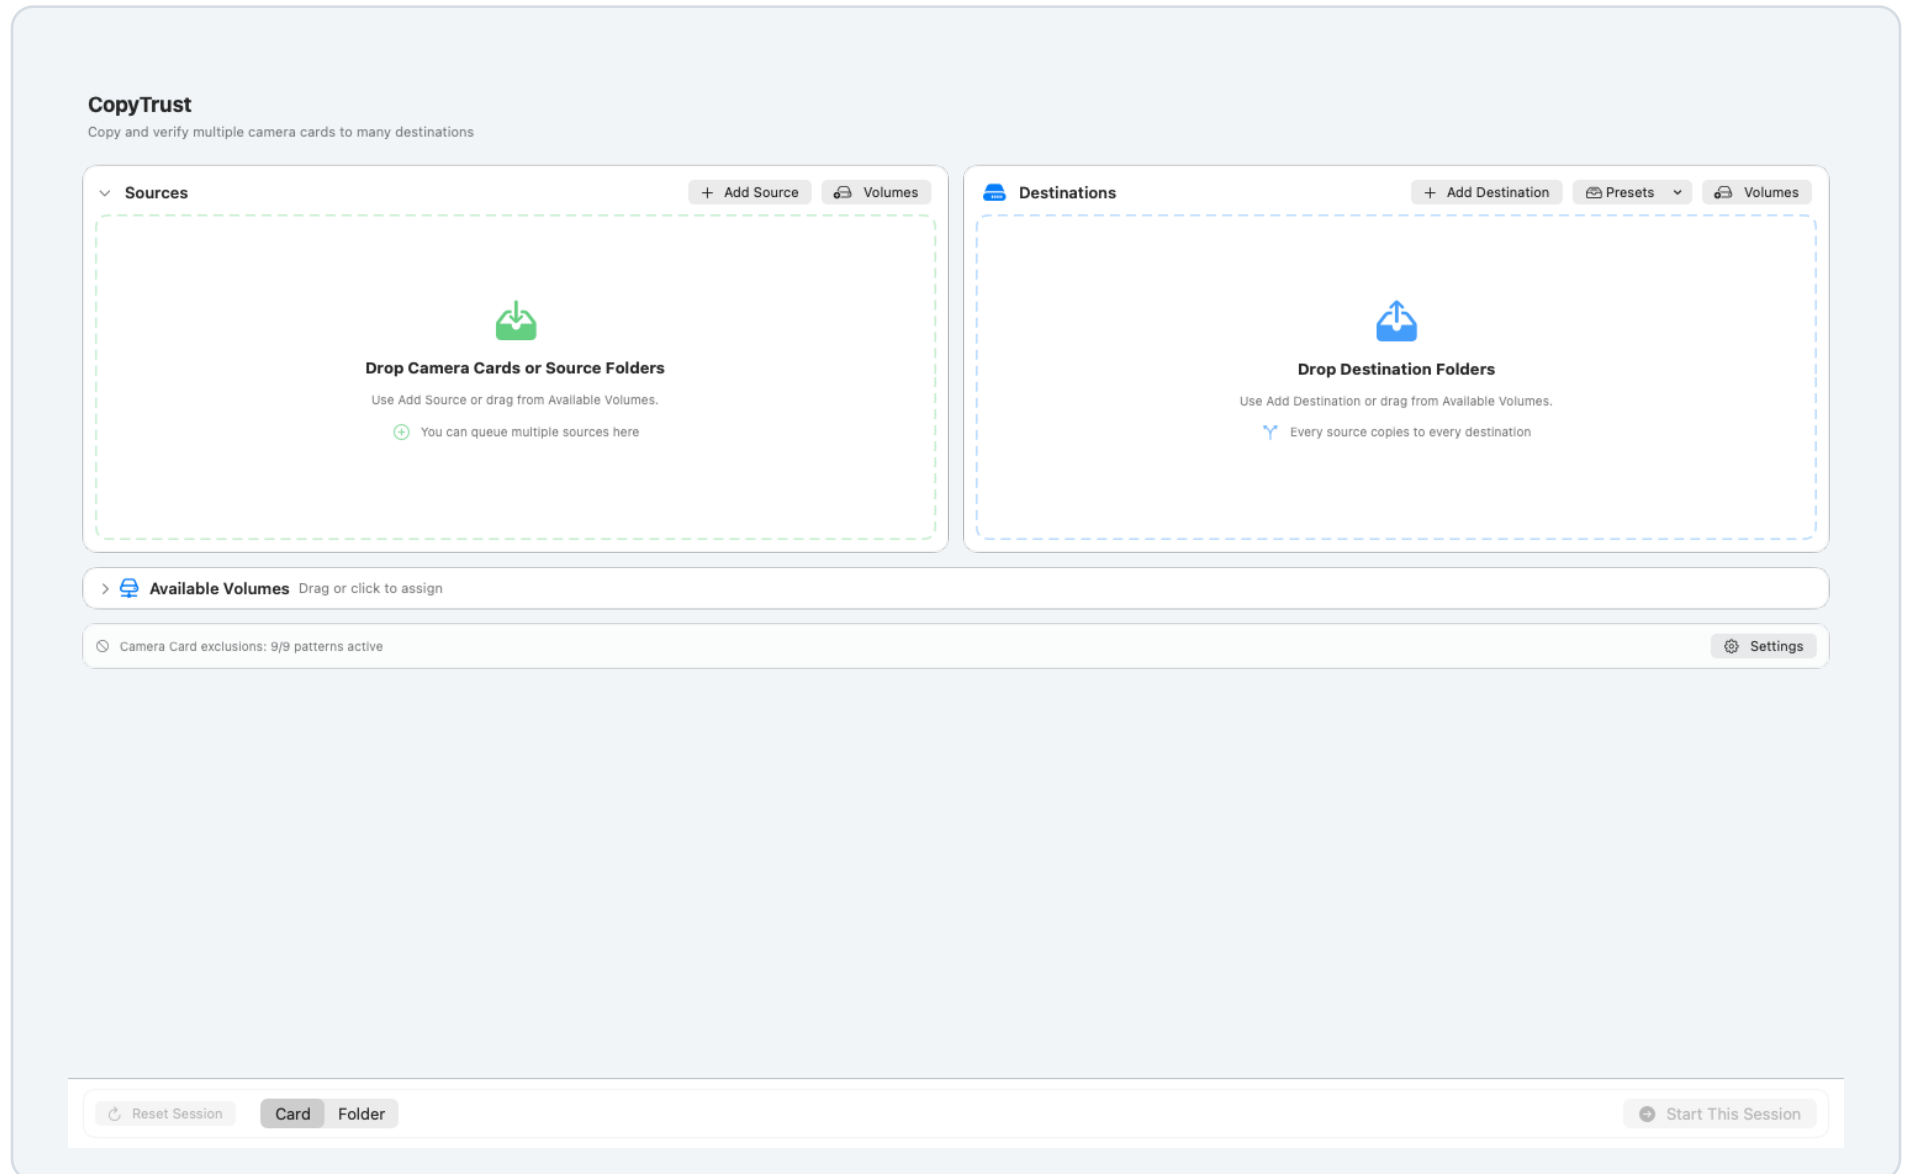

Prepare a direct session

Add one source and one or more destinations, confirm the naming preview, and check preflight before starting.

CopyTrust

Copy and verify multiple camera cards to many destinations

▼ Sources

+ Add Source

Volumes

 **A001** DCIM Canon Card A001 /Volumes/A001 Scanning...

+ Add another card...

 **On-set SSD** Volume Samsung T7 /Volumes/Samsung T7

+ Add another destination...

>  Available Volumes

Drag or click to assign

▼  Queued Sessions (0)

Stage this setup for later

Queue Current Session saves this source and destination setup, then clears the workspace so you can build the next one. It does not start copying by itself.

Queue Current Session

No queued or chained sessions yet.

🔍 Camera Card exclusions: 9/9 patterns active

Settings

>  Activity Log

Reset Session

Card

Folder

 Preflight passed  Start blocked

 Queue Current Session

 2.5.4b2

 2_5_4b2_A001

 Start This Session

Stage mixed queued jobs

Queue separate Card and Folder jobs when different sources need different destinations or post-copy settings.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source

Volumes


Drop Camera Cards or Source Folders
Use Add Source or drag from Available Volumes.
 You can queue multiple sources here

Destinations

+ Add Destination

Presets

Volumes


Drop Destination Folders
Use Add Destination or drag from Available Volumes.
 Every source copies to every destination

Available Volumes

Drag or click to assign

Queued Sessions (3)

Run the queued list

Start Queue runs queued sessions in order. Copy, verify, MHL, and receipt work finish first; PDF/CSV artifacts continue in the background and do not block the next queued session.

Start Queue

A001 → On-set SSD + Studio NAS Card 1 source → On-set SSD, Studio NAS	Queued	Load	↑	↓	🗑
Project Phoenix → Archive RAID Folder 1 source → Archive RAID	Queued	Load	↑	↓	🗑
B002 → Studio NAS Card 1 source → Studio NAS	Queued	Load	↑	↓	🗑

Camera Card exclusions: 9/9 patterns active

Settings

Reset Session

Card

Folder

Start This Session

Build a relay chain

For A to B to C, order destinations fastest first and use Queue Relay Chain so each downstream leg waits for verified upstream output.

CopyTrust

Copy and verify multiple camera cards to many destinations

Sources

+ Add Source

Volumes



Drop Camera Cards or Source Folders

Use Add Source or drag from Available Volumes.

+ You can queue multiple sources here

Destinations

+ Add Destination

Presets

Volumes



Drop Destination Folders

Use Add Destination or drag from Available Volumes.

Y Every source copies to every destination

Available Volumes

Drag or click to assign

Queued Sessions (2)

Run the queued list

Start Queue Queue

A001 → On-set SSD Card

A001 - Camera Card → On-set SSD - Volume

Step 1 of 2 — copies from A001 (camera card).

Queued Load Edit

On-set SSD → Studio NAS Card

On-set SSD - Volume → Studio NAS - Volume

Step 2 of 2 — waits for On-set SSD (volume) to be verified, then copies from it.

Blocked Load Edit

Waiting for Step 1 verified output

Camera Card exclusions: 9/9 patterns active

Settings

Reset Session

Card Folder

Start This Session

Set post-copy actions

Use the Post-Copy tab to configure confirmation, contact sheets, metadata, HTML trees, proxy media, and destination sorting for Card or Folder mode.

The screenshot shows the 'Post-Copy' tab in the CopyTrust 2.7 settings window. The window has a title bar with tabs: 'Card Copy', 'Folder Copy', 'Post-Copy' (selected), 'External Codecs', 'Notifications', and 'Test'. The 'Post-Copy' section is divided into three main areas: 'Before Copy', 'Contact Sheet', and 'EXIF / Media Metadata CSV'. The 'Before Copy' section has a toggle for 'Confirm copy mode before starting' (disabled) and a description: 'Shows the mode, verification level, and artifact settings before each new session starts. Auto-advanced cards and resumes are not interrupted.' The 'Configure artifacts for' section has two buttons: 'Card Copy' (selected) and 'Folder Copy'. Below it, a message states: 'Card mode is active — changes apply to the next copy.' The 'Contact Sheet' section has a toggle for 'Generate contact sheet PDF' (disabled), a 'Layout style' dropdown set to 'Row (detailed metadata)', a toggle for 'Open contact sheet automatically after creation' (disabled), a toggle for 'Hide unsupported format placeholders' (disabled), and a 'Split large contact sheets' dropdown set to 'Every 250 files'. A note at the bottom of this section says: 'Cards with more files than the limit are split into numbered PDFs (part1of3, part2of3, ...). When multiple PDFs are created, auto-open reveals them in Finder instead of opening each one.' The 'EXIF / Media Metadata CSV' section is currently empty. A 'Done' button is located at the bottom right of the window.

Card Copy | Folder Copy | **Post-Copy** | External Codecs | Notifications | Test

Before Copy

Confirm copy mode before starting ☐

Shows the mode, verification level, and artifact settings before each new session starts. Auto-advanced cards and resumes are not interrupted.

Configure artifacts for **Card Copy** | Folder Copy

Card mode is active — changes apply to the next copy.

Contact Sheet

Generate contact sheet PDF ☐

Layout style Row (detailed metadata)

Open contact sheet automatically after creation ☐

Hide unsupported format placeholders ☐

Split large contact sheets Every 250 files

Cards with more files than the limit are split into numbered PDFs (part1of3, part2of3, ...). When multiple PDFs are created, auto-open reveals them in Finder instead of opening each one.

EXIF / Media Metadata CSV

Done

Archive a verified destination to P5

CopyTrust 2.7.0 Build 1 adds this optional post-copy action for controlled testing with expendable media and a non-deleting plan.

1

Configure

In Settings > P5 Archive, enter the server and Keychain password, load the live archive index, P5 client, and archive plan.

2

Verify the path

Confirm the selected P5 client sees the CopyTrust destination at exactly the same absolute path.

3

Use hash verification

Choose Full or Inline. Quick and copy-only jobs can write a deferred request but are never automatically submitted.

4

Review both systems

Inspect the request JSON and job state, then confirm archived paths and searchable CT metadata in P5 Web.

5

Restore and prove

Restore through P5 and verify every restored file against the preserved capture MHL and xxHash64.

Safety: source-deleting plans are blocked, every automatic submission needs a complete xxHash64, and P5 failure never changes a successful CopyTrust copy/verification verdict.