


DFS

Fő szerver:

- Windows AD-ban DFS

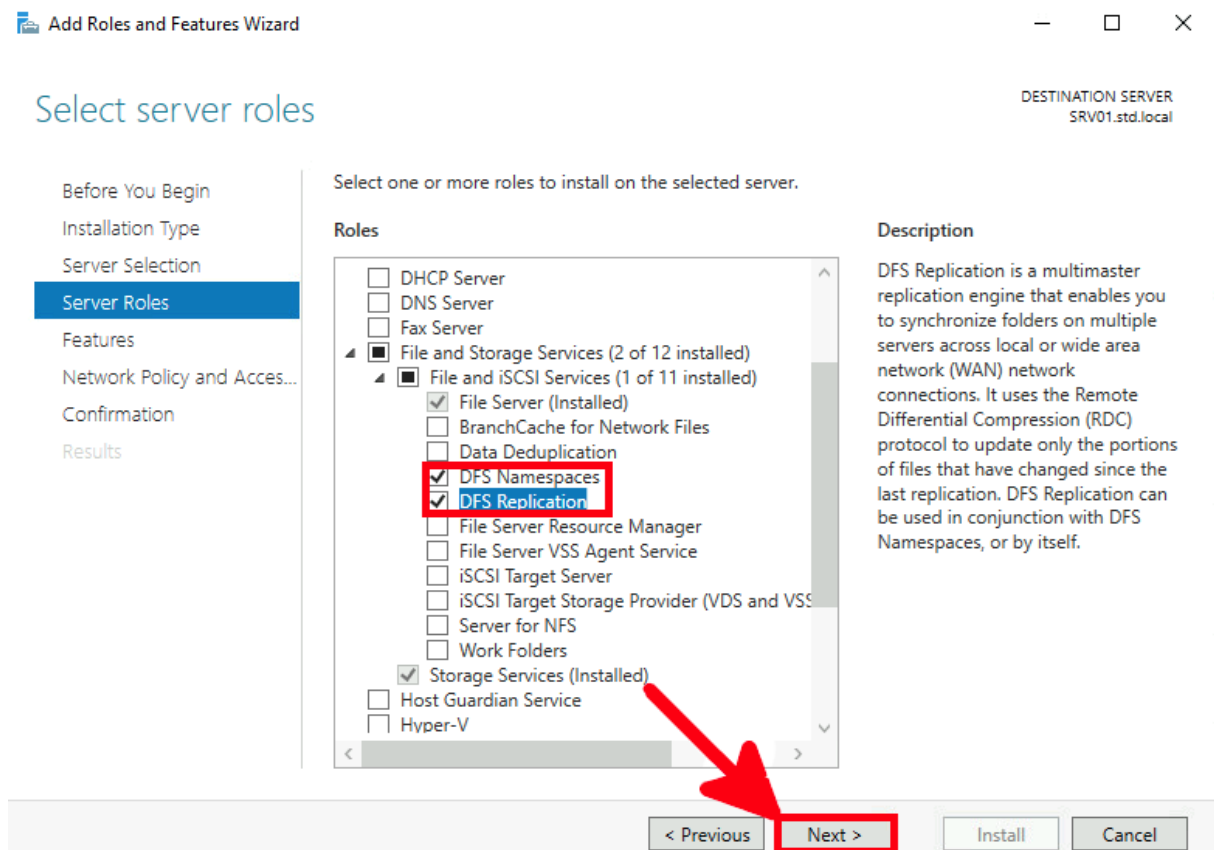

- Egy új fizikai meghajtót hozzáadni (D:\ elnevezni)



Mellékszerveren:

- Csatlakozni a domain-hez
- Majd a Win AD-hez, és DFS letölteni ugyanúgy
- Egy új fizikai meghajtót hozzáadni (D:\ elnevezni)

Kliensen

- Csatlakozni a domain-hez

Csinálunk egy Namespace-t (Főszerver):

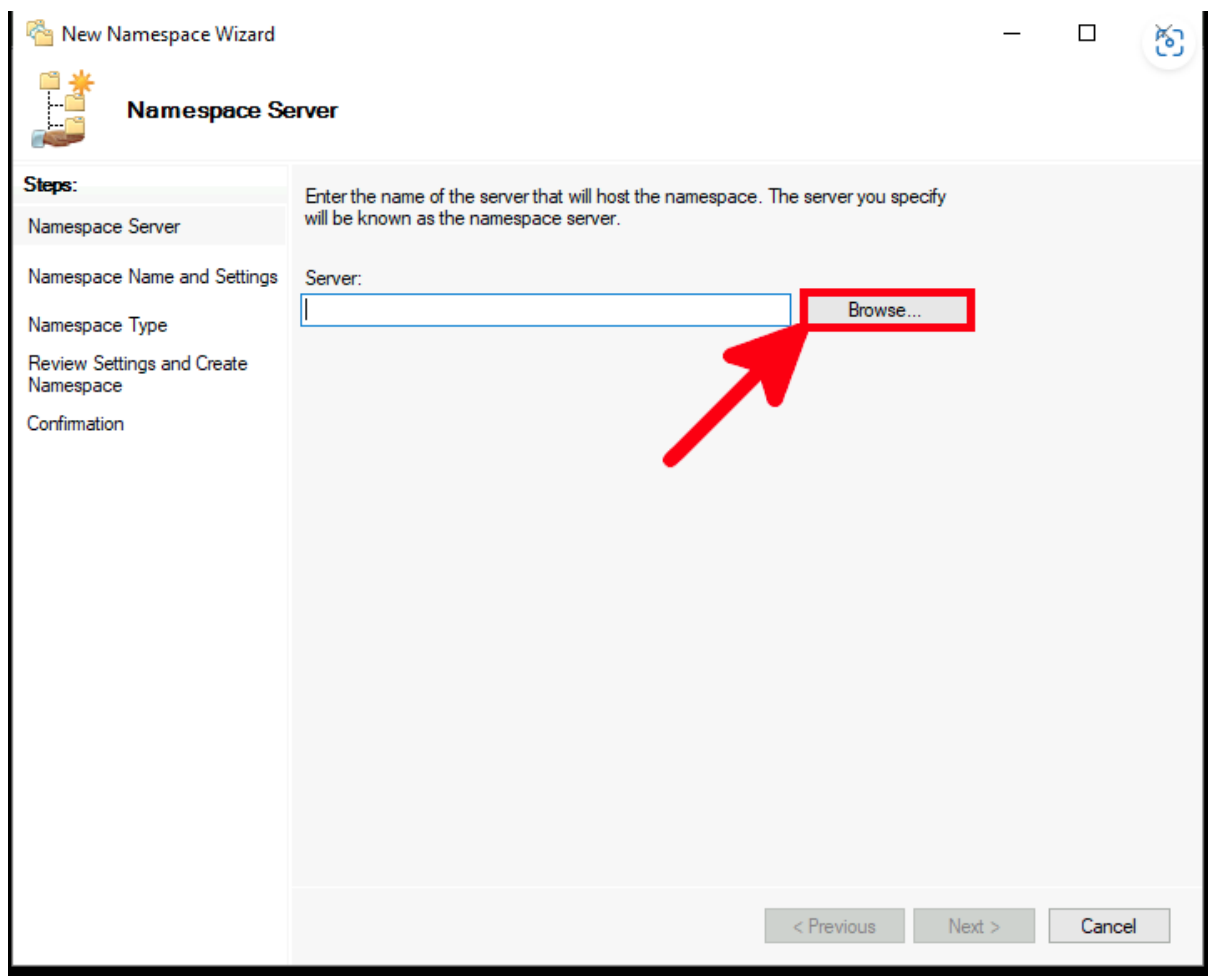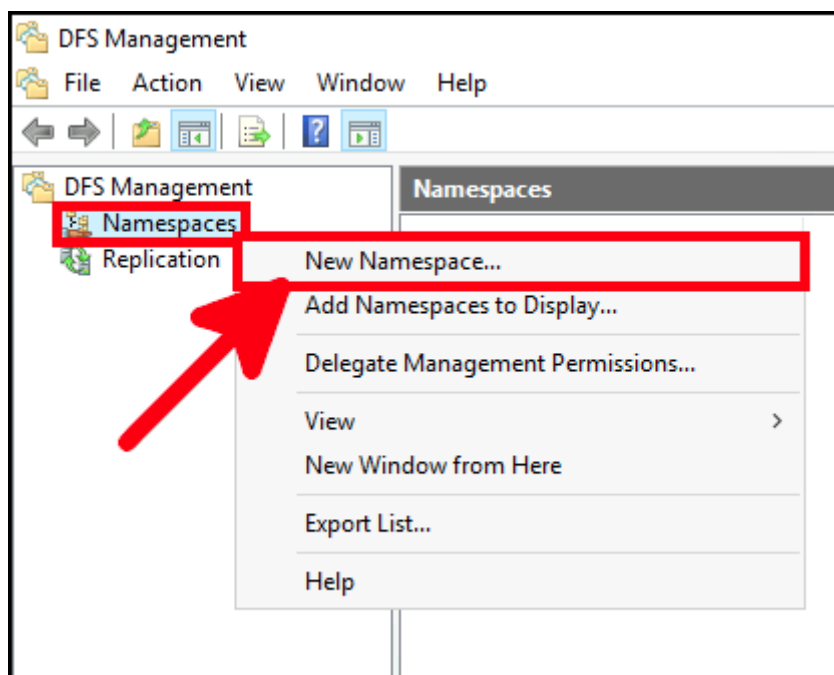

Select Computer

Select this object type:
Computer Object Types...

From this location:
std.local Locations...

Enter the object name to select (examples):
SRV01 Check Names

Advanced... OK Cancel

New Namespace Wizard



Namespace Server

Steps:

Namespace Server

Namespace Name and Settings

Namespace Type

Review Settings and Create Namespace

Confirmation

Enter the name of the server that will host the namespace. The server you specify will be known as the namespace server.

Server:

srv01

Browse...

< Previous

Next >

Cancel

New Namespace Wizard

Namespace Name and Settings

Steps:

- Namespace Server
- Namespace Name and Settings**
- Namespace Type
- Review Settings and Create Namespace
- Confirmation

Enter a name for the namespace. This name will appear after the server or domain name in the namespace path, such as \\Server\Name or \\Domain\Name.

Name:

Example: Public

If necessary, the wizard will create a shared folder on the namespace server. To modify the settings of the shared folder, such as its local path and permissions, click Edit Settings.

New Namespace Wizard

Namespace Type

Steps:

- Namespace Server
- Namespace Name and Settings
- Namespace Type**
- Review Settings and Create Namespace
- Confirmation

Select the type of namespace to create.

☒ Domain-based namespace

A domain-based namespace is stored on one or more namespace servers and in Active Directory Domain Services. You can increase the availability of a domain-based namespace by using multiple servers. When created in Windows Server 2008 mode, the namespace supports increased scalability and access-based enumeration.



☒ Enable Windows Server 2008 mode


Preview of domain-based namespace:

☐ Stand-alone namespace



A stand-alone namespace is stored on a single namespace server. You can increase the availability of a stand-alone namespace by hosting it on a failover cluster.

Preview of stand-alone namespace:

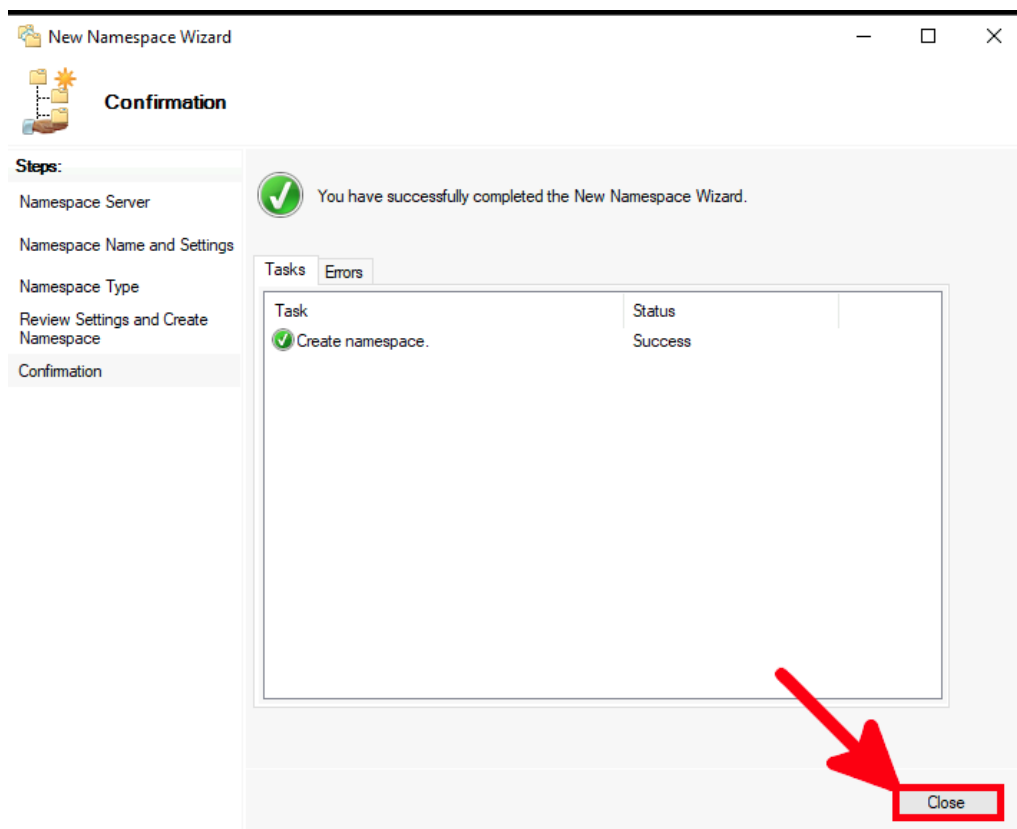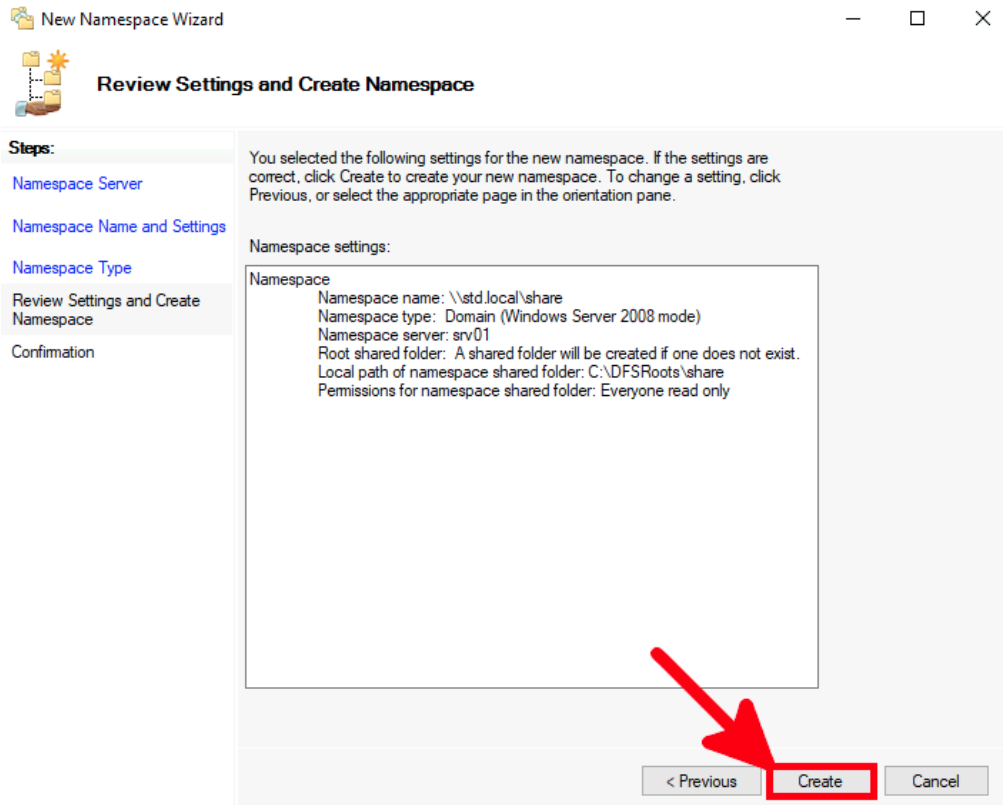

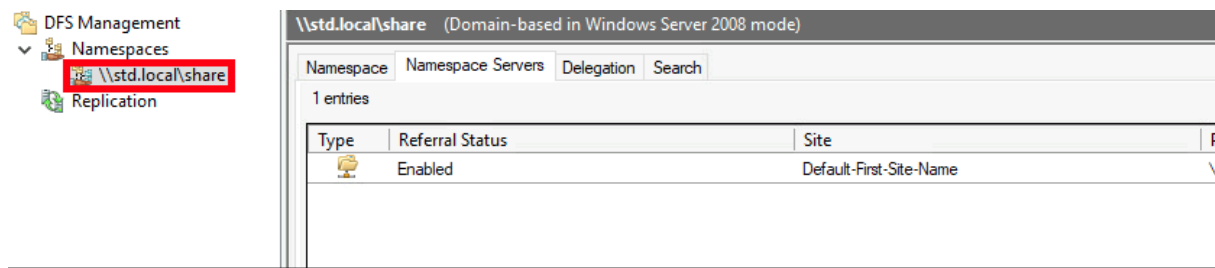

Csinálunk egy Namespace-t (Mellékszerverek):

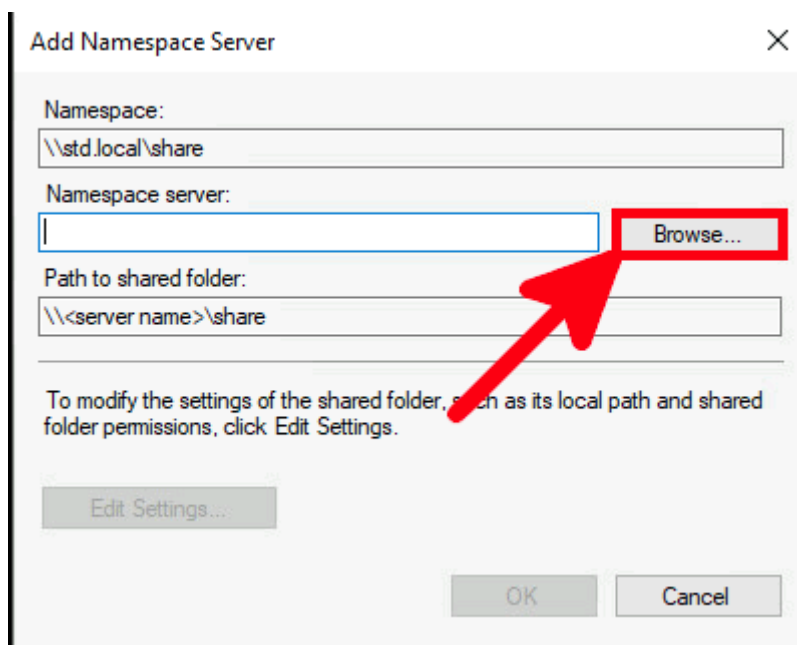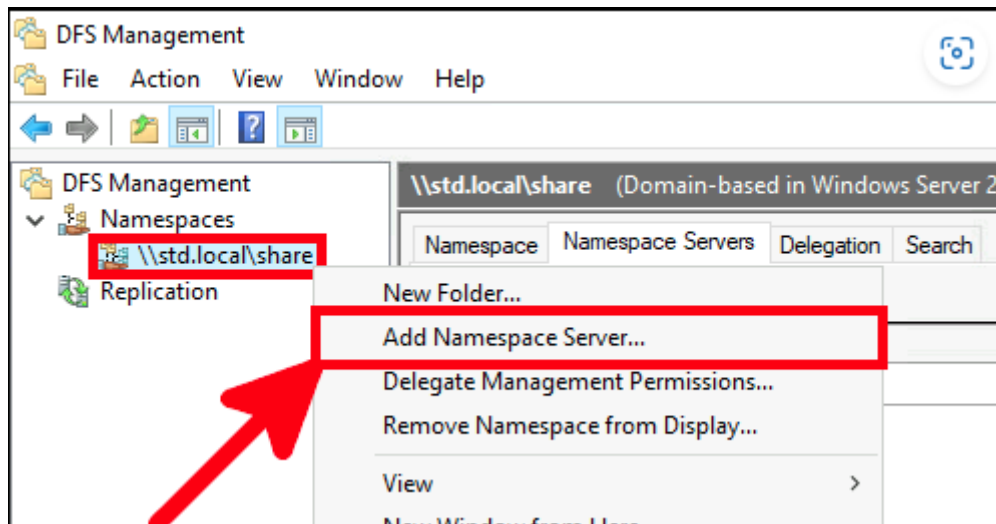

Select Computer

Select this object type:
Computer Object Types...

From this location:
std.local Locations...

Enter the object name to select (examples):
SRV02 Check Names

Advanced... OK Cancel

Add Namespace Server

Namespace:
\\std.local\share

Namespace server:
SRV02 Browse...

Path to shared folder:
\\SRV02\share

To modify the settings of the shared folder, such as its local path and shared folder permissions, click Edit Settings.

Edit Settings... OK Cancel

DFS Management

Namespaces

\\std.local\share

Replication

\\std.local\share

(Domain-based in Windows Server 2008 mode)

Namespace

Namespace Servers



Delegation



Search



2 entries

Type	Referral Status	Site	Path
	Enabled	Default-First-Site-Name	\\SRV01.std.local\share
	Enabled	Default-First-Site-Name	\\SRV02.std.local\share

Megosztási mappa létrehozása:

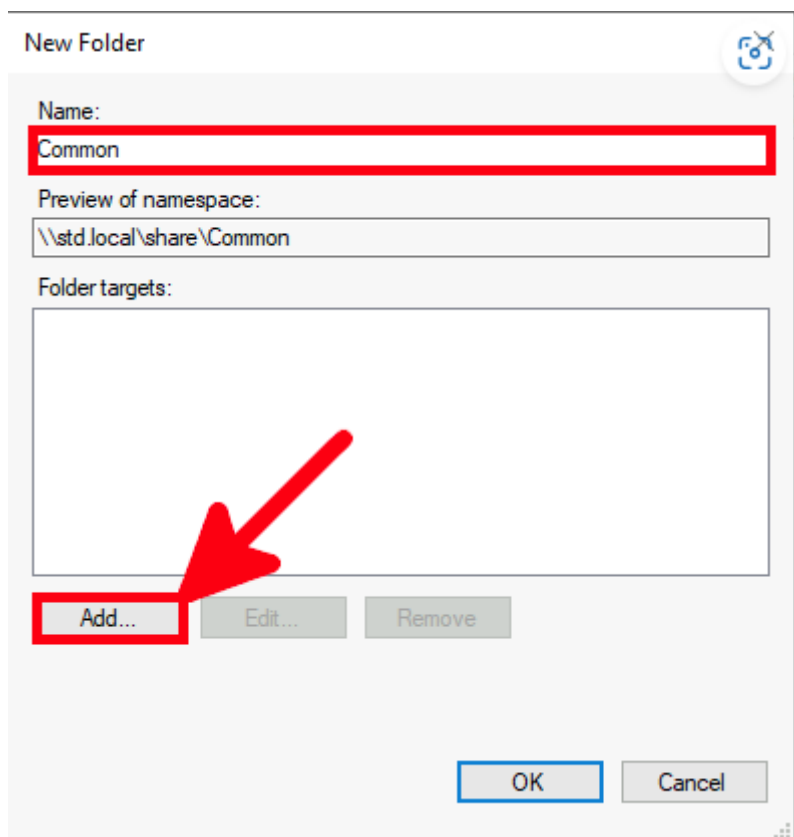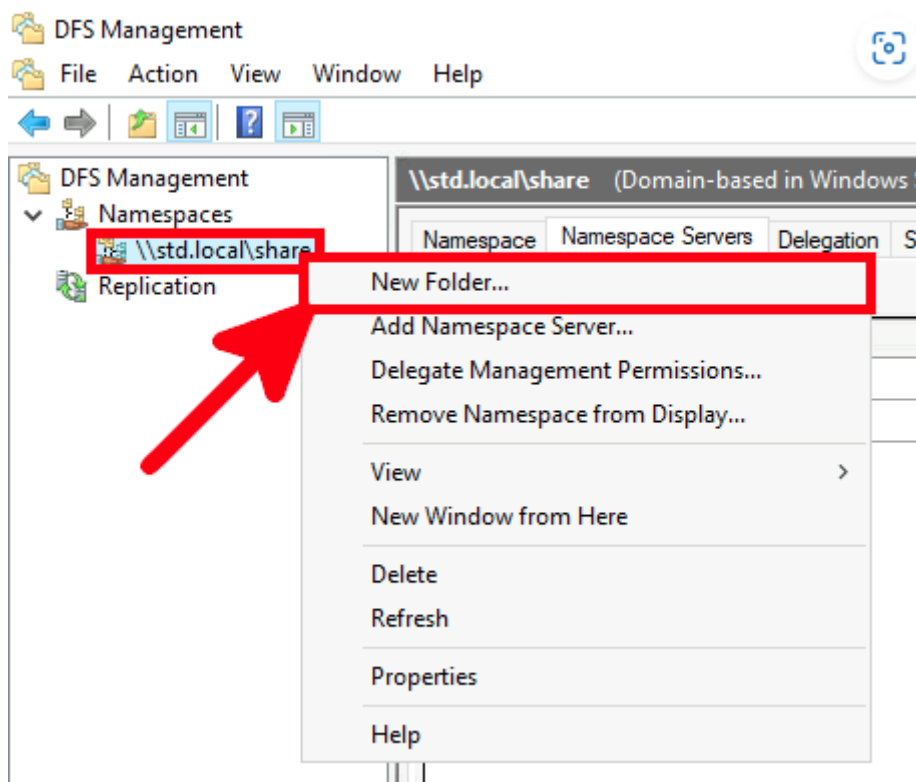

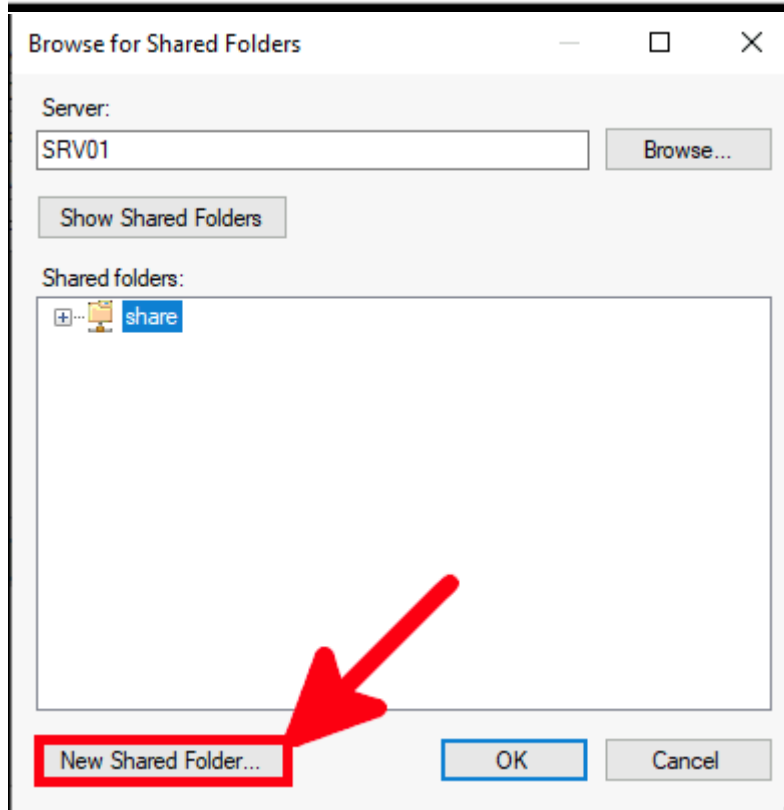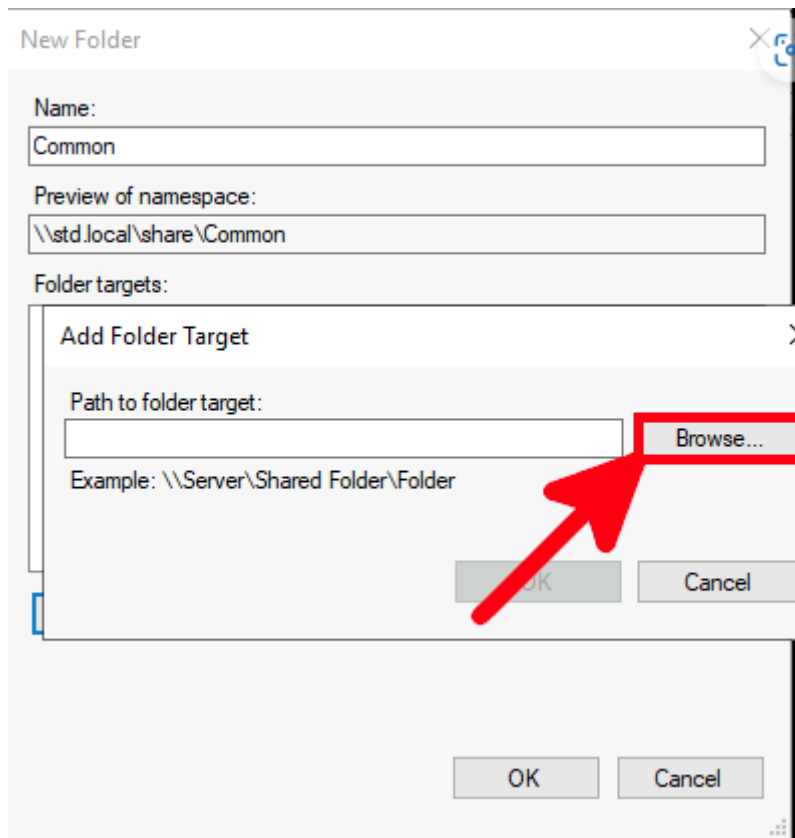

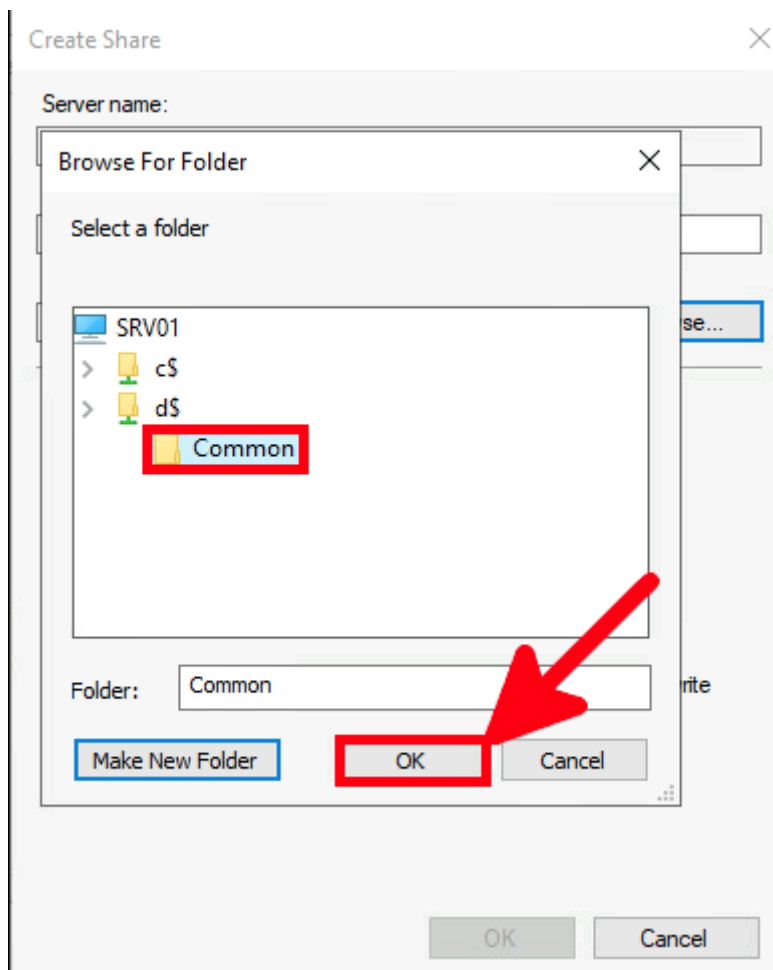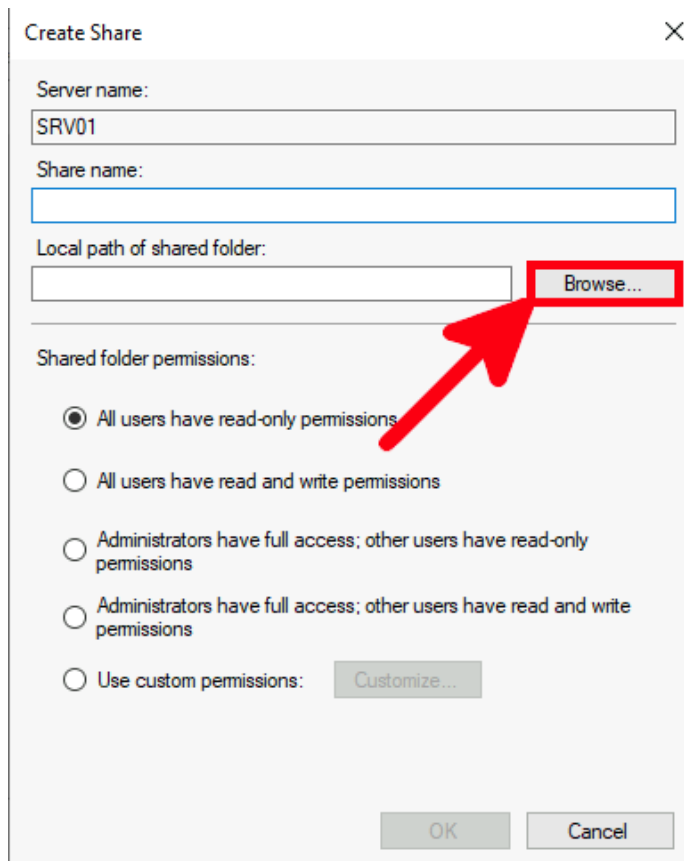

Create Share ✕

Server name:
SRV01


Share name:
Common

Local path of shared folder:
d:\Common Browse...

Shared folder permissions:

- ☒ All users have read-only permissions
- ☐ All users have read and write permissions
- ☐ Administrators have full access; other users have read-only permissions
- ☐ Administrators have full access; other users have read and write permissions
- ☐ Use custom permissions: Customize...

OK Cancel



Browse for Shared Folders — □ ✕

Server:
SRV01 Browse...


Show Shared Folders

Shared folders:


-  Common
-  share

New Shared Folder... **OK** Cancel



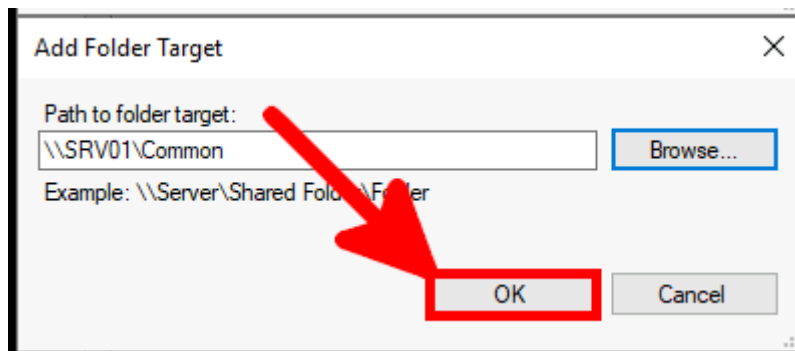

Ezt meg kell ismételni a két mellékszerverrel

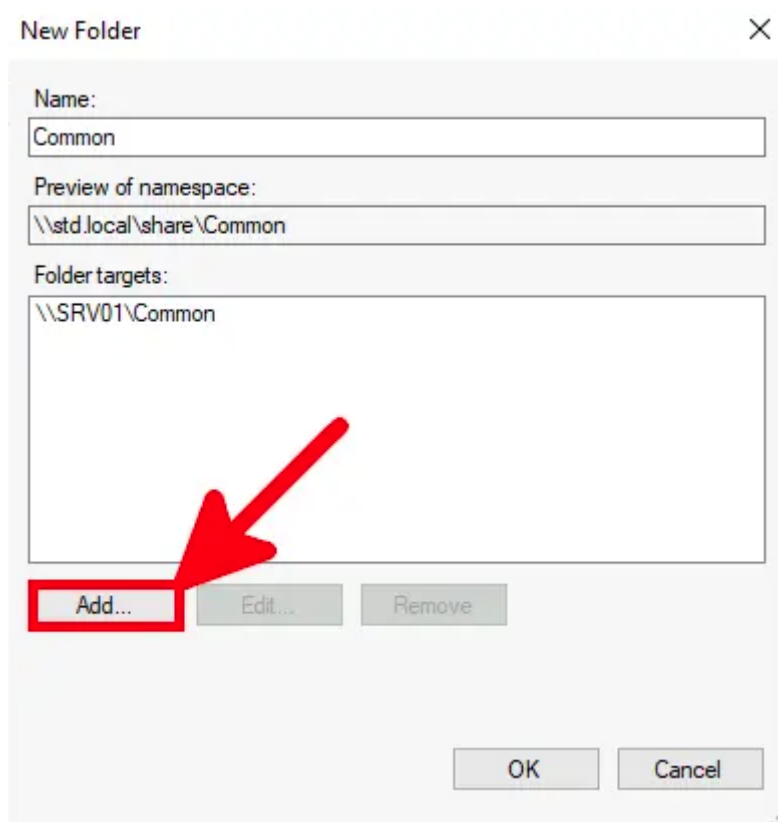

Eddig jutottunk, mivel újra kellett kezdenünk, mivel a **főszerver** megváltoztatta a Szerver nevét.