

LibreNMS

Megjegyzés:

Ez a funkció erősebb szerverekre lett kitalálva, virtuális gépen nem sikerült megfelelően beállítani sajnos

Ez a linken jobban megmagyarázva:

<https://docs.librenms.org/Installation/Install-LibreNMS/>

```
apt install acl ca-certificates curl fping git lsb-release mariadb-client mariadb-server mtr-tiny  
nginx-full nmap php-cli php-curl php-fpm php-gd php-gmp php-mbstring php-mysql php-  
snmp php-xml php-zip python3-dotenv python3-pip python3-psutil python3-pymysql  
python3-redis python3-setuptools python3-systemd rrdtool snmp snmpd unzip wget whois
```

```
useradd librenms -d /opt/librenms -M -r -s "$(which bash)"
```

```
cd /opt
```

```
git clone https://github.com/librenms/librenms.git
```

```
chown -R librenms:librenms /opt/librenms
```

```
chmod 771 /opt/librenms
```

```
setfacl -d -m g::rwx /opt/librenms/rrd /opt/librenms/logs /opt/librenms/bootstrap/cache/  
/opt/librenms/storage/
```

```
setfacl -R -m g::rwx /opt/librenms/rrd /opt/librenms/logs /opt/librenms/bootstrap/cache/  
/opt/librenms/storage/
```

```
su – librenms
```

```
./scripts/composer_wrapper.php install --no-dev
```

```
exit
```

Timezone megadása:

```
nano /etc/php/8.2/fpm/php.ini
```

```
nano /etc/php/8.2/cli/php.ini
```

timedatectl set-timezone Europe/Budapest

```
[Date]
;Defines the default timezone used by the date functions
https://php.net/date.timezone
date.timezone = Europe/Budapest
```


MariaDB

nano /etc/mysql/mariadb.conf.d/50-server.cnf

Within the [mysqld] section add:

innodb_file_per_table=1

lower_case_table_names=0

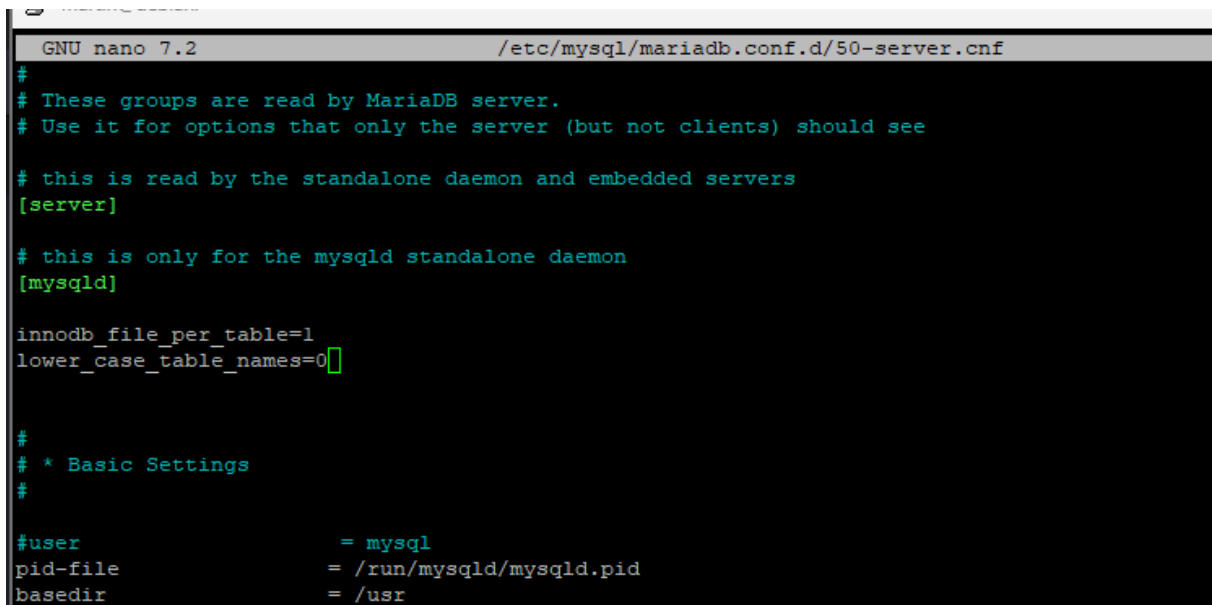

```
GNU nano 7.2 /etc/mysql/mariadb.conf.d/50-server.cnf
#
# These groups are read by MariaDB server.
# Use it for options that only the server (but not clients) should see
#
# this is read by the standalone daemon and embedded servers
[server]
#
# this is only for the mysqld standalone daemon
[mysqld]
innodb_file_per_table=1
lower_case_table_names=0
#
# * Basic Settings
#
#user                    = mysql
pid-file                 = /run/mysqld/mysqld.pid
basedir                  = /usr
```

Then restart MariaDB

systemctl enable mariadb

systemctl restart mariadb

mysql -u root

```
CREATE DATABASE librenms CHARACTER SET utf8mb4 COLLATE
utf8mb4_unicode_ci;
```

```
CREATE USER 'librenms'@'localhost' IDENTIFIED BY 'Passw0rd';
```


```
GRANT ALL PRIVILEGES ON librenms.* TO 'librenms'@'localhost';
```

exit

Configure PHP-FPM

```
cp /etc/php/8.2/fpm/pool.d/www.conf /etc/php/8.2/fpm/pool.d/librenms.conf
```

```
nano /etc/php/8.2/fpm/pool.d/librenms.conf
```

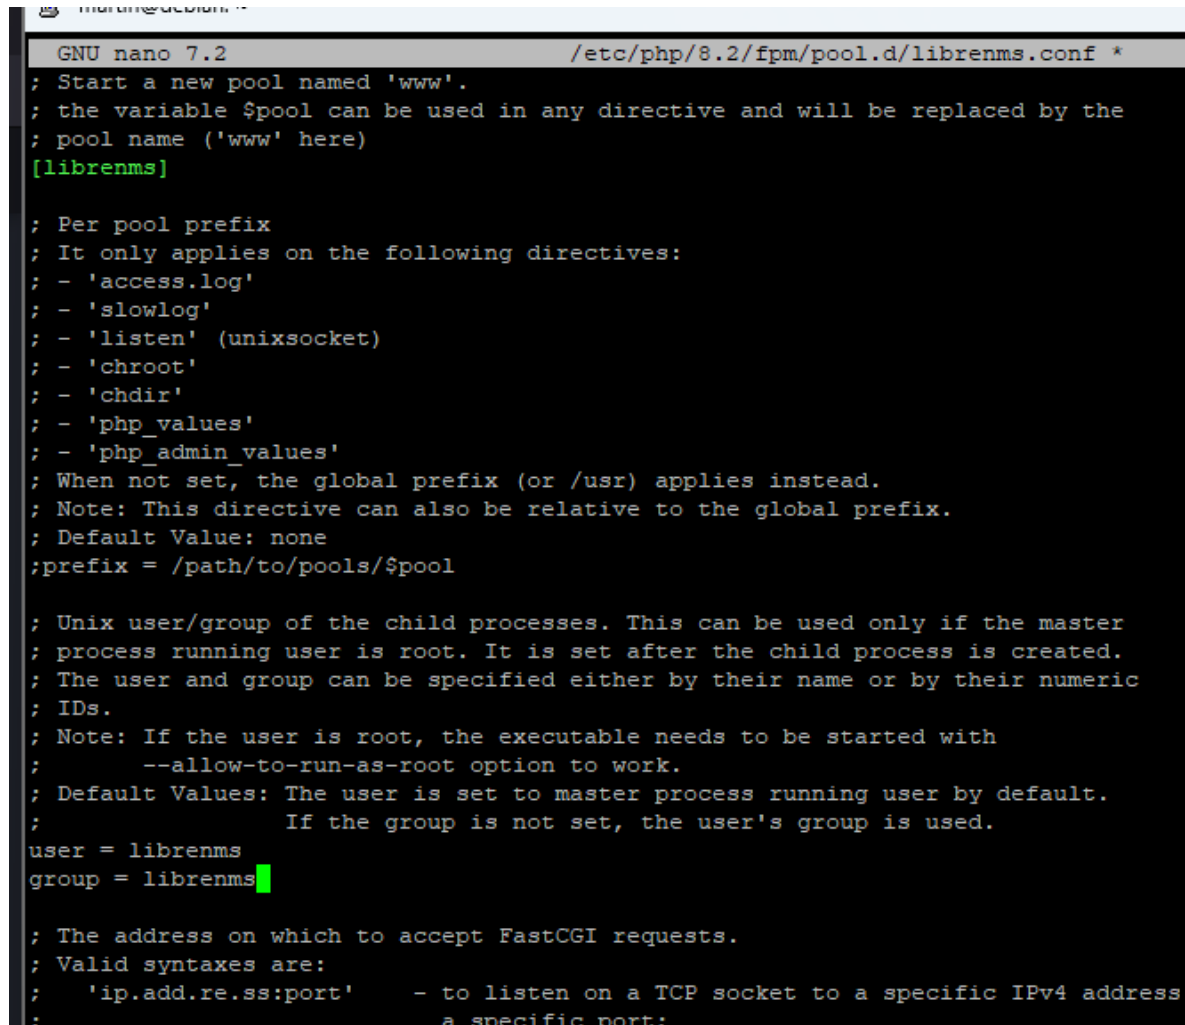

```
GNU nano 7.2 /etc/php/8.2/fpm/pool.d/librenms.conf *
; Start a new pool named 'www'.
; the variable $pool can be used in any directive and will be replaced by the
; pool name ('www' here)
[librenms]

; Per pool prefix
; It only applies on the following directives:
; - 'access.log'
; - 'slowlog'
; - 'listen' (unixsocket)
; - 'chroot'
; - 'chdir'
; - 'php_values'
; - 'php_admin_values'
; When not set, the global prefix (or /usr) applies instead.
; Note: This directive can also be relative to the global prefix.
; Default Value: none
;prefix = /path/to/pools/$pool

; Unix user/group of the child processes. This can be used only if the master
; process running user is root. It is set after the child process is created.
; The user and group can be specified either by their name or by their numeric
; IDs.
; Note: If the user is root, the executable needs to be started with
; --allow-to-run-as-root option to work.
; Default Values: The user is set to master process running user by default.
;                  If the group is not set, the user's group is used.
user = librenms
group = librenms

; The address on which to accept FastCGI requests.
; Valid syntaxes are:
;   'ip.add.re.ss:port'    - to listen on a TCP socket to a specific IPv4 address
;   'ip.add.re.ss:port'    - to listen on a TCP socket to a specific IPv6 address
;   'unixsocket'           - to listen on a unix socket
;   'pipe'                  - to listen on a named pipe
;   '*'                     - to listen on all interfaces (default)
```

```
nano /etc/nginx/sites-enabled/librenms.vhost
```

```
martin@debian: ~  
GNU nano 7.2 /etc/nginx/sites-enabled/librenms.vhost *  
server {  
    listen      80;  
    server_name 192.168.109.182 librenms.example.com;  
    root        /opt/librenms/html;  
    index       index.php;  
  
    charset utf-8;  
    gzip on;  
    gzip_types text/css application/javascript text/javascript application/x-javascript image/svg+xml ;  
    location / {  
        try_files $uri $uri/ /index.php?$query_string;  
    }  
    location ~ [^/]\.php(/|$) {  
        fastcgi_pass unix:/run/php-fpm-librenms.sock;  
        fastcgi_split_path_info ^(.+\.php) (/\.+)$;  
        include fastcgi.conf;  
    }  
    location ~ /\.(!well-known).* {  
        deny all;  
    }  
}
```

rm /etc/nginx/sites-enabled/default

systemctl reload nginx

systemctl restart php8.2-fpm

ln -s /opt/librenms/lnms /usr/bin/lnms

cp /opt/librenms/misc/lnms-completion.bash /etc/bash_completion.d/

cp /opt/librenms/snmpd.conf.example /etc/snmp/snmpd.conf

nano /etc/snmp/snmpd.conf

```
marlin@debian: ~  
GNU nano 7.2 /etc/snmp/snmpd.conf  
Change RANDOMSTRINGGOESHERE to your preferred SNMP community string  
com2sec readonly default martinszerver  
  
group MyROGroup v2c readonly  
view all included .1 80  
access MyROGroup "" any noauth exact all none none  
  
syslocation Rack, Room, Building, City, Country [Lat, Lon]  
syscontact Your Name <your@email.address>  
  
#OS Distribution Detection  
extend distro /usr/bin/distro  
  
#Hardware Detection  
# (uncomment for x86 platforms)  
#extend manufacturer '/bin/cat /sys/devices/virtual/dmi/id/sys_vendor'  
#extend hardware '/bin/cat /sys/devices/virtual/dmi/id/product_name'  
#extend serial '/bin/cat /sys/devices/virtual/dmi/id/product_serial'  
  
# (uncomment for ARM platforms)  
#extend hardware '/bin/cat /sys/firmware/devicetree/base/model'  
#extend serial '/bin/cat /sys/firmware/devicetree/base/serial-number'
```

```
GNU nano 7.2 /opt/librenms/.env *  
APP_KEY=base64:3F37wHvu9oUoezky0aY9Xnw4SDYmLLn+rCHdH9D/5TQ=  
  
DB_HOST=localhost  
DB_DATABASE=librenms  
DB_USERNAME=librenms  
DB_PASSWORD=Passw0rd  
  
APP_URL=http://192.168.109.181  
  
APP_LOCALE=en  
APP_FALLBACK_LOCALE=en  
APP_FAKER_LOCALE=en_US  
APP_MAINTENANCE_DRIVER=file  
APP_MAINTENANCE_STORE=database  
PHP_CLI_SERVER_WORKERS=4  
  
BCRYPT_ROUNDS=12  
  
LOG_STACK=single  
  
SESSION_ENCRYPT=false  
SESSION_PATH=/  
SESSION_DOMAIN=null  
NODE_ID=696e179317145  
VAPID_PUBLIC_KEY=BLCOI9mG74cl7huPxNrGwrjfr6_U2xrLVe4hK8sBRI0zFBgMygQrTN6  
VAPID_PRIVATE_KEY=_vmFCG8A2LV3PiKD5TnbKV30Q-B5rERr36Yu9VP-NwI
```