

AWS Assignment 2

Objectives

- Create a bucket in Amazon S3
- Add an object to a bucket
- Manage access permissions on an object and a bucket
- Create a bucket policy
- Use bucket versioning

Step 1: Set Object Ownership (ACLs Enabled)

You selected ACLs enabled and set ownership to Object writer.

This allows control over individual object permissions using ACL instead of only bucket policies.

Object Ownership info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

☐ Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☒ Object writer
The object writer remains the object owner.

Warning: We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Step 2: Configure Block Public Access Settings

You reviewed the “Block Public Access” section and allowed public access by adjusting the settings. This step ensures the bucket can be made public when required.

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.


☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Warning: Turning off block all public access might result in this bucket and the objects within becoming public. AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.


Step 3: Open Object and Choose “Make Public”

You opened the uploaded file (WORKING_TEXT_PDF.ipynb) and selected **Make public** using **ACL**. This action prepares the object to be accessible publicly.

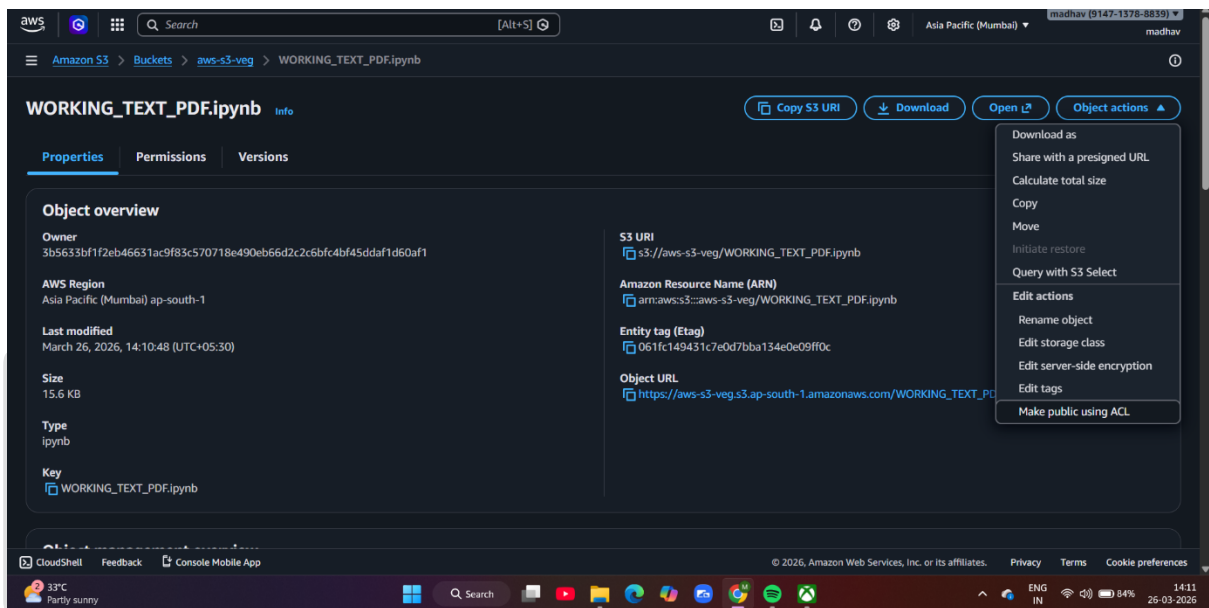

Step 4: Confirm Public Access Settings

You confirmed the object in the “Make public” window and clicked the **Make public** button. This step applies public-read permission to the selected object.

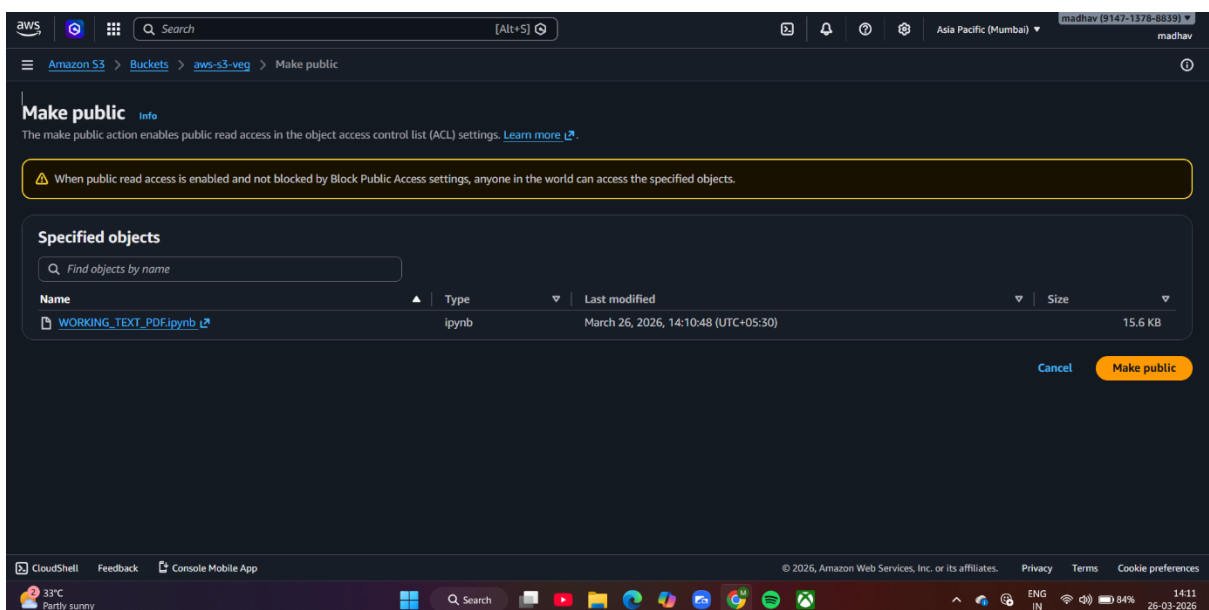

Step 5: Verify Public Access Success

The system displayed a success message: “Successfully edited public access”.
This confirms the object is now publicly accessible via its URL.

