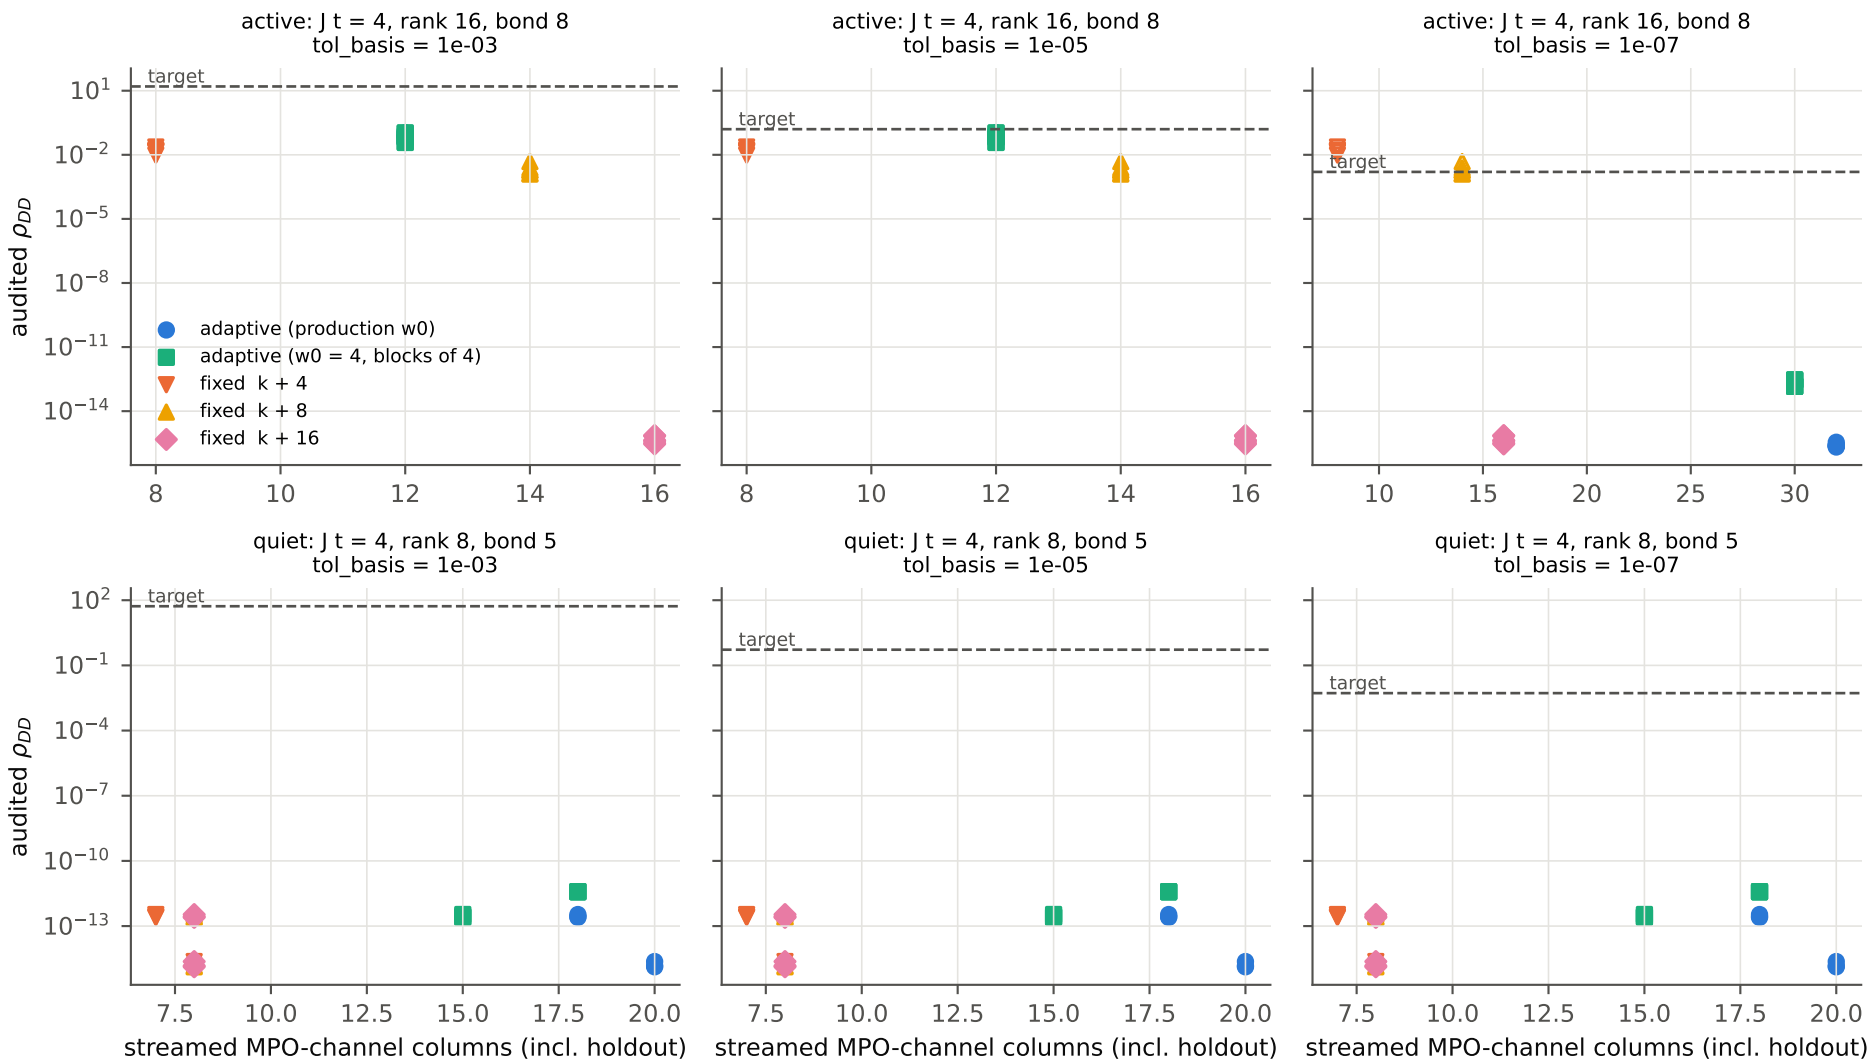
Fig. 1A adaptive stopping vs one-shot fixed oversampling (same DD + QR); hollow = a seed/side missed the target
active: J t = 4, rank 16, bond 8
tol_basis = 1e-03
active: J t = 4, rank 16, bond 8
tol_basis = 1e-05
active: J t = 4, rank 16, bond 8
tol_basis = 1e-07
quiet: J t = 4, rank 8, bond 5
tol_basis = 1e-03
quiet: J t = 4, rank 8, bond 5
tol_basis = 1e-05
quiet: J t = 4, rank 8, bond 5
tol_basis = 1e-07
target
audited $\rho_{DD}$
adaptive (production w0)
adaptive (w0 = 4, blocks of 4)
fixed k + 4
fixed k + 8
fixed k + 16
streamed MPO-channel columns (incl. holdout)