


BEHAVIORAL PATTERN

Idea: Prefer Push to Poll.

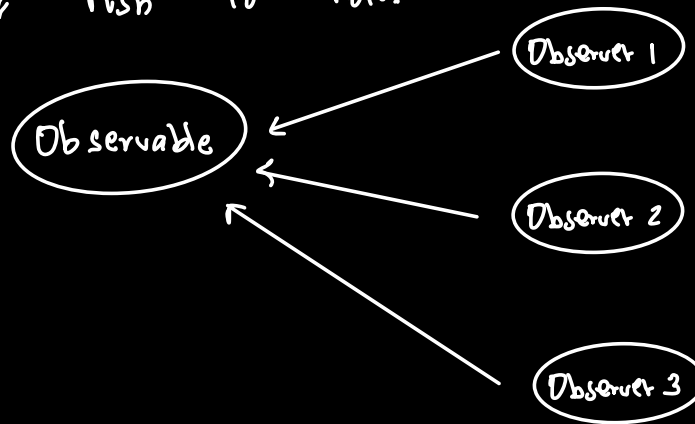

The observers update their state every time observable state changes.

→ Poll periodically

- * How many times

 - ↳ lot of requests

- * Observable flooded

→ Push on change

- * Has to maintain

 - the list of

 - observers!

