


Recurrence is task-clustered, not 120 independent Bernoulli trials

All candidates from a sampled task move together. Intervals describe sensitivity to the finite task set, not population prevalence.

Reset-release

8 tasks · 72 candidates


14 / 57 determinate functional passes

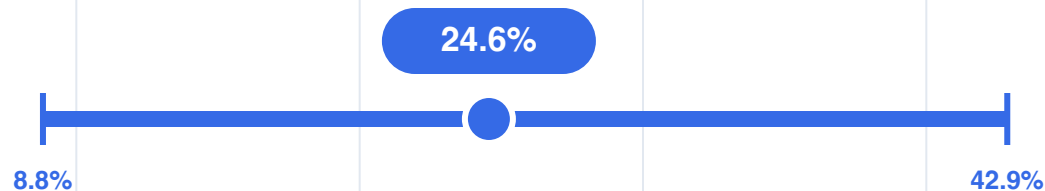

Expanded contracts

8 tasks · 48 candidates

11 / 40 determinate functional passes

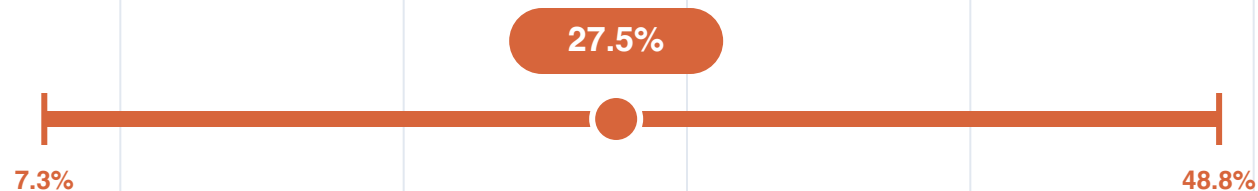

Method: 100,000-replicate nonparametric bootstrap over whole task clusters; percentile interval; fixed seed 20260824.