

**Reading the client data using java.lang.IO class :**

IO class has provided various static methods to read the client data which are as follows :

1) public static **String** readln() :

It is a predefined static metod of IO class.

It is used to read the complete line from the console and return type of this is **String**.

//WAP to read your name from the keyword

```
void main()
{
    IO.print("Enter your Name :");
    String name = IO.readln();
    IO.println("Your Name is :"+name);
}
```

2) public static String readln(String prompt) :

It is a predefined static method of IO class

It is used to perform two tasks :

- a) By using prompt argument we can pass some input message to the end user.
- b) It will read complete line and return type of this method is String.

//WAP to read your name from the keyword

```
void main()
{
    String name = IO.readln("Enter your Name :");
    IO.println("Your Name is :"+name);
}
```

//WAP to read your marks (int value) from keyboard

ReadMarks.java


```
void main()
{
    String marks = IO.readln("Enter your Marks :");
    IO.println("Your Marks is :"+marks);

    if(marks > 75) //error String > int
    {
        IO.println("Grade A");
    }
}
```

Note : We can read marks (int data) in String format  
We can print also but if we try to compare OR  
try to perform addition OR subtraction then we will  
get compilation error

How to convert a String value into integer.

In order to convert a String value into an integer value, Java software people has provided a predefined class called **Integer**, this Integer class has provided a predefined static method called **parseInt(String x)** through which we can automatically convert String value into integer type.

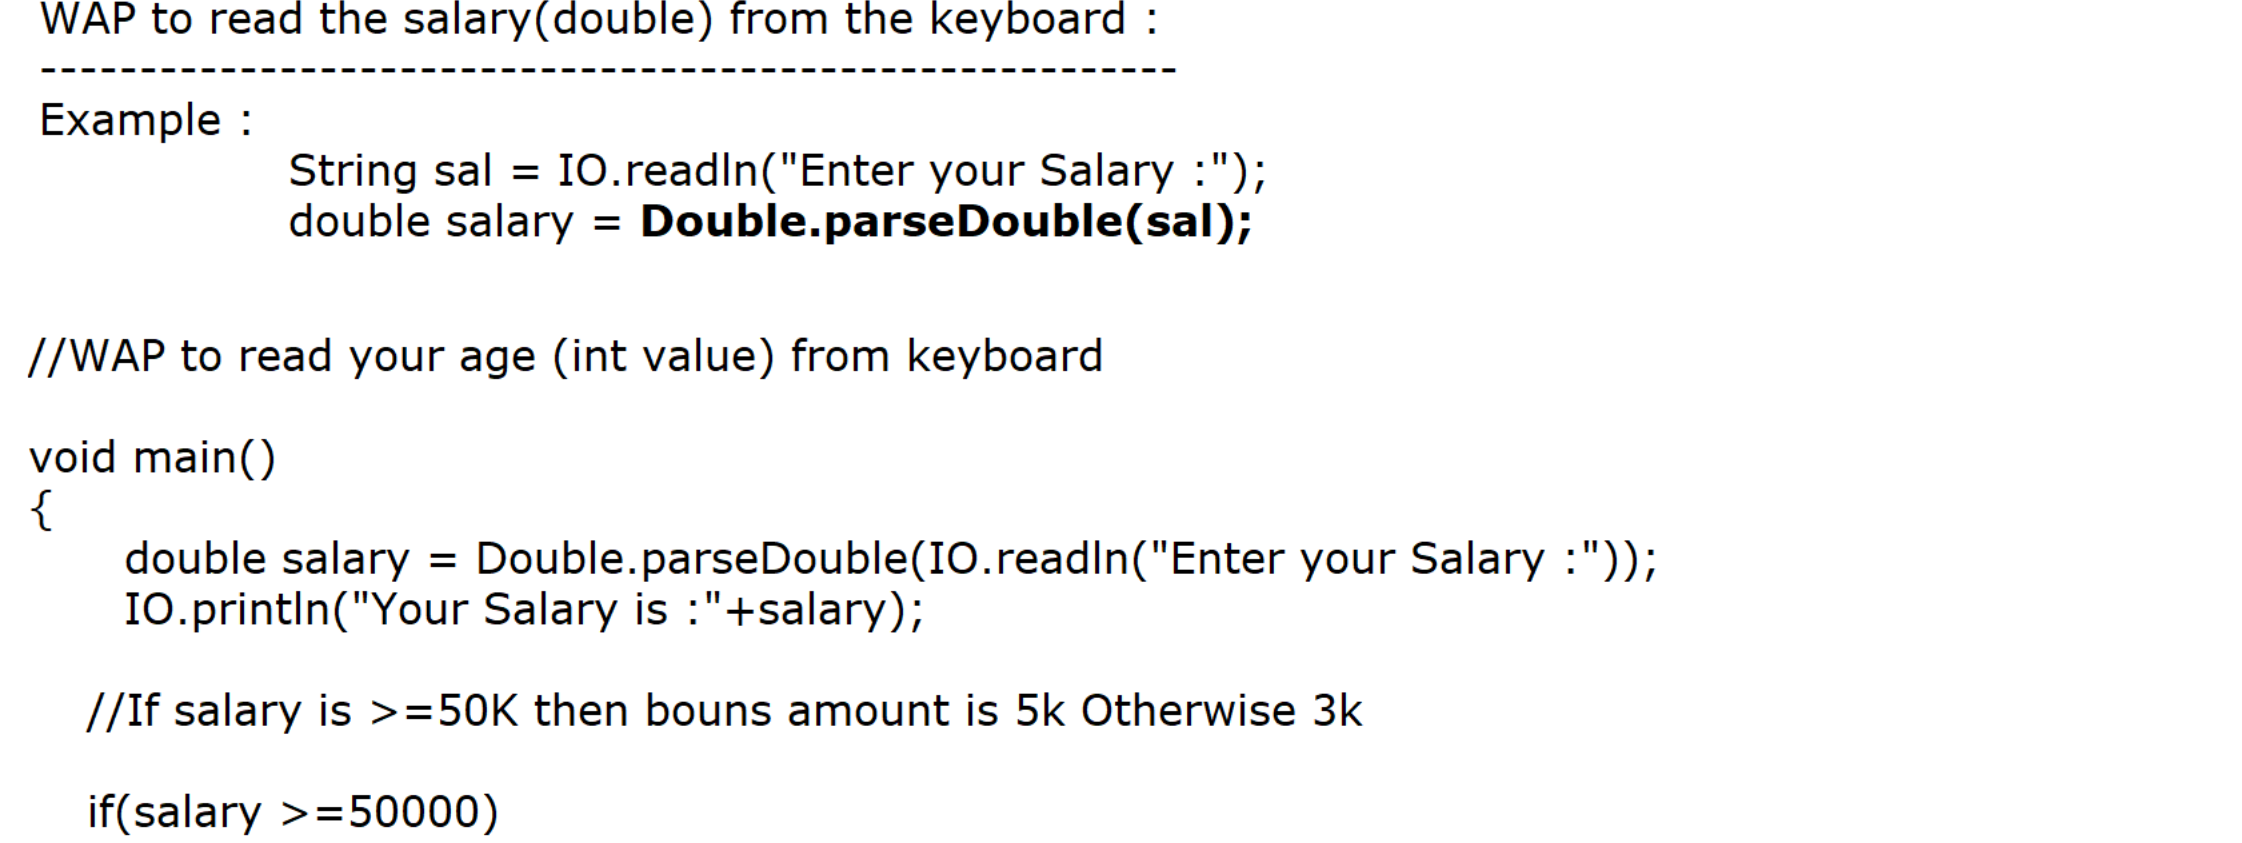

//WAP to read your marks (int value) from keyboard

```
void main()
{
    String marks = IO.readln("Enter your Marks :");

    int myMarks = Integer.parseInt(marks);
    IO.println("Marks is :"+myMarks);

    if(myMarks >= 75)
    {
        IO.println("Grade A");
    }
}
```

//WAP to read your age (int value) from keyboard

```
void main()
{
    int age = Integer.parseInt(IO.readln("Enter your Age :"));
    IO.println("Your age is :"+age);
    IO.println("Your age is :"+(age+2));
}
```

WAP to read the salary(double) from the keyboard :

Example : String sal = IO.readln("Enter your Salary :");  
double salary = **Double.parseDouble(sal)**;

//WAP to read your age (int value) from keyboard

```
void main()
{
    double salary = Double.parseDouble(IO.readln("Enter your Salary :"));
    IO.println("Your Salary is :"+salary);

    //If salary is >=50K then bouns amount is 5k Otherwise 3k

    if(salary >=50000)
    {
        IO.println("Bonus amount is 5K");
    }
    else
    {
        IO.println("Bonus amount is 3K");
    }
}
```