
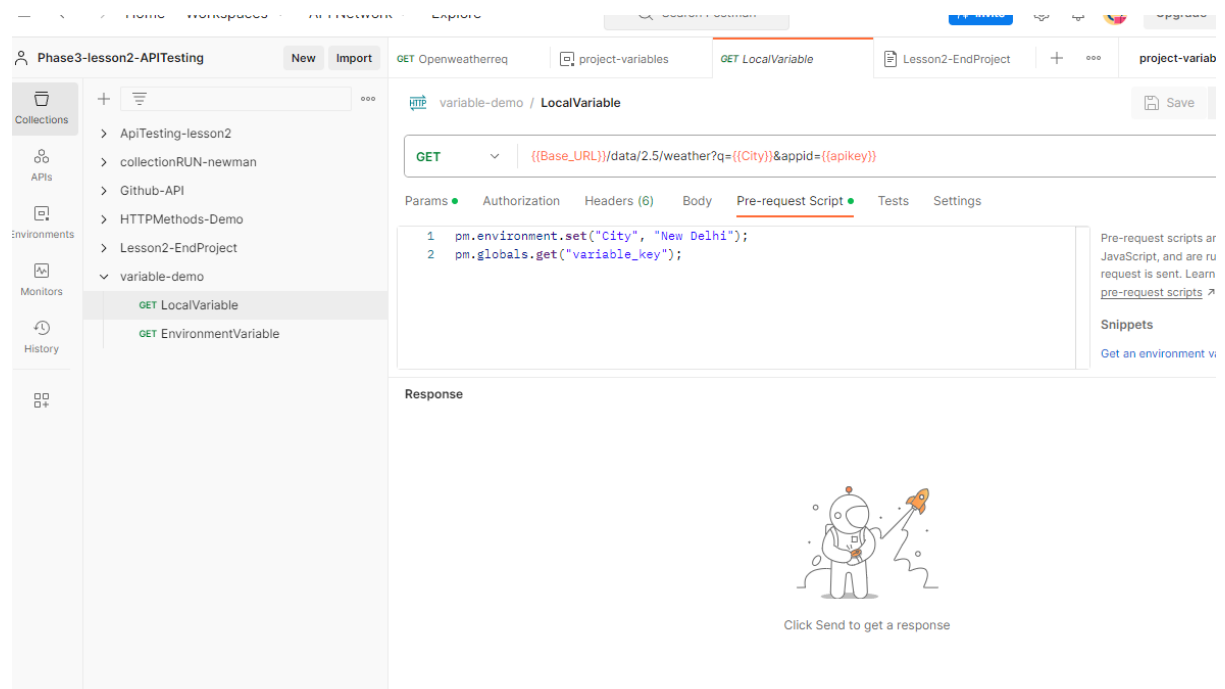


Demonstrate how to work with variables in Postman.

Variables and there scope in Postman

Create a collection → create a new request → get methods→ openweather API:

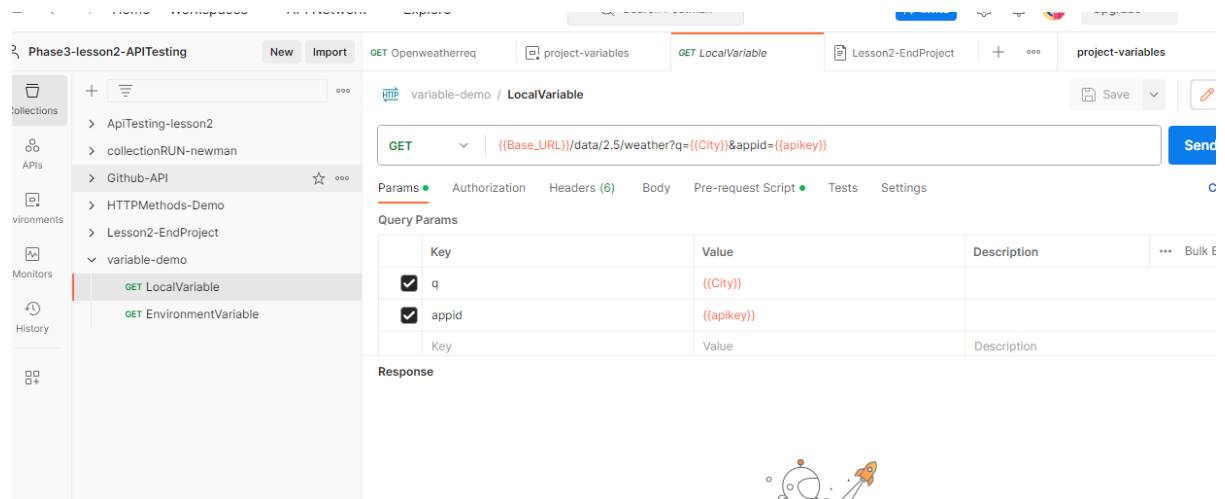

HomeWorkspacesAPI NetworkExplore

Search Postman

Invite

Upgrade

Phase3-lesson2-APITestingNewImportGET Openweatherreqproject-variablesGET EnvironmentVariableLesson2-EndProject+...project-variables

collections+...
APIs
vironments
Monitors
History

> ApiTesting-lesson2
> collectionRUN-newman
> Github-API
> HTTPMethods-Demo
> Lesson2-EndProject
variable-demo
GET LocalVariable
GET EnvironmentVariable

variable-demo / EnvironmentVariable

GET{{Base_URL}}/data/2.5/weather?q={{City}}&appid={{apikey}}


ParamsAuthorizationHeaders (6)BodyPre-request ScriptTestsSettings

1pm.environment.set("City", "New Delhi");

Pre-request scripts are written in JavaScript, and are run before the request is sent. Learn more [pre-request scripts](#)

Snippets
[Get an environment variable](#)

Response



Click Send to get a response

OnlineFind and replaceConsolePosthogRunnerStart ProxyCool