

DBMS – ORDER AND ORDER DETAILS

Project Title: EcoCart – Sustainable Products E-Commerce Order Management System

1. Database Design


1.1 Order Table

Attribute	Key	Description
Order_ID	Primary Key (PK)	Unique ID of the order
Order_Date	-	Date the order was placed
Order_Status	-	Current status of the order
Total_Amount	-	Total amount of the order
Customer_ID	Foreign Key (FK)	ID of the customer who placed the order

1.2 Order_Details Table

Attribute	Key	Description
Order_Detail_ID	Primary Key (PK)	Unique ID of the order detail
Order_ID	Foreign Key (FK)	ID of the order
Product_ID	Foreign Key (FK)	ID of the product ordered
Quantity	-	Number of products ordered
Unit_Price	-	Price of one product
Subtotal	-	Total price for the product quantity

2. Table Relationships

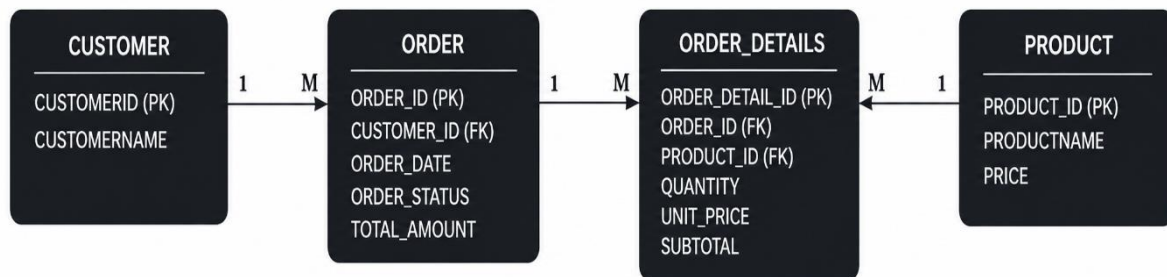

3. Table Creation

3.1 Create Orders Table

```
SQL> CREATE TABLE "ORDER" (  
2     Order_ID NUMBER PRIMARY KEY,  
3     Order_Date DATE,  
4     Order_Status VARCHAR2(20),  
5     Total_Amount NUMBER(10,2),  
6     Customer_ID NUMBER  
7 );
```

Table created.

3.2 Create Order_Details

```
SQL> CREATE TABLE ORDER_DETAILS (  
2     Order_Detail_ID NUMBER PRIMARY KEY,  
3     Order_ID NUMBER,  
4     Product_ID NUMBER,  
5     Quantity NUMBER,  
6     Unit_Price NUMBER(10,2),  
7     Subtotal NUMBER(10,2),  
8     FOREIGN KEY (Order_ID) REFERENCES ORDERS(Order_ID)  
9 );
```

4. Order Data Insertion

```
SQL> INSERT INTO "ORDER"
  2 (Order_ID, Order_Date, Order_Status, Total_Amount, Customer_ID)
  3 VALUES
  4 (101, TO_DATE('15-09-2026','DD-MM-YYYY'), 'Delivered', 2500, 1);

1 row created.

SQL>
SQL> INSERT INTO "ORDER"
  2 (Order_ID, Order_Date, Order_Status, Total_Amount, Customer_ID)
  3 VALUES
  4 (102, TO_DATE('16-09-2026','DD-MM-YYYY'), 'Shipped', 1800, 2);

1 row created.

SQL>
SQL> INSERT INTO "ORDER"
  2 (Order_ID, Order_Date, Order_Status, Total_Amount, Customer_ID)
  3 VALUES
  4 (103, TO_DATE('17-09-2026','DD-MM-YYYY'), 'Processing', 3200, 3);

1 row created.

SQL>
SQL> INSERT INTO "ORDER"
  2 (Order_ID, Order_Date, Order_Status, Total_Amount, Customer_ID)
  3 VALUES
  4 (104, TO_DATE('18-09-2026','DD-MM-YYYY'), 'Delivered', 1500, 4);

1 row created.

SQL>
SQL> INSERT INTO "ORDER"
  2 (Order_ID, Order_Date, Order_Status, Total_Amount, Customer_ID)
  3 VALUES
  4 (105, TO_DATE('19-09-2026','DD-MM-YYYY'), 'Pending', 2750, 5);

1 row created.
```

5. Order_Details Data Insertion

```
SQL> INSERT INTO ORDER_DETAILS
  2 (Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (1, 101, 201, 2, 500, 1000);

1 row created.

SQL>
SQL> INSERT INTO ORDER_DETAILS
  2 (Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (2, 101, 202, 1, 1500, 1500);

1 row created.

SQL>
SQL> INSERT INTO ORDER_DETAILS
  2 (Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (3, 102, 203, 2, 900, 1800);

1 row created.

SQL>
SQL> INSERT INTO ORDER_DETAILS
  2 (Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (4, 103, 204, 4, 800, 3200);

1 row created.

SQL>
SQL> INSERT INTO ORDER_DETAILS
  2 (Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price, Subtotal)
  3 VALUES
  4 (5, 104, 205, 3, 500, 1500);

1 row created.
```

6. Order Modification Operations

6.1 Modify Order Amount

```
SQL> UPDATE "ORDER"  
  2  SET Order_Status = 'Delivered'  
  3  WHERE Order_ID = 106;  
  
1 row updated.
```

```
SQL> SELECT *  
  2  FROM "ORDER"  
  3  WHERE Order_ID = 106;
```

ORDER_ID	ORDER_DAT	ORDER_STATUS	TOTAL_AMOUNT	CUSTOMER_ID
106	20-SEP-26	Delivered	2000	2

6.2 Modify Order Date

```
SQL> UPDATE "ORDER"  
  2  SET Order_Date = TO_DATE('20-SEP-2026', 'DD-MON-YYYY')  
  3  WHERE Order_ID = 106;  
  
1 row updated.
```

7. Order_Details Modification

```
SQL> UPDATE ORDER_DETAILS  
  2  SET Quantity = 3,  
  3      Subtotal = 3000.00  
  4  WHERE Order_Detail_ID = 1;  
  
1 row updated.
```

8. Customer Order History Report

```
SQL> SELECT
  2     O.Customer_ID,
  3     O.Order_ID,
  4     O.Order_Date,
  5     O.Order_Status,
  6     OD.Product_ID,
  7     OD.Quantity,
  8     OD.Unit_Price,
  9     OD.Subtotal
10 FROM "ORDER" O
11 JOIN ORDER_DETAILS OD
12 ON O.Order_ID = OD.Order_ID
13 ORDER BY O.Customer_ID, O.Order_Date;
```

CUSTOMER_ID	ORDER_ID	ORDER_DAT	ORDER_STATUS	PRODUCT_ID	QUANTITY
1	101	15-SEP-26	Delivered	201	2
500	1000				

1	101	15-SEP-26	Delivered	202	1
1500	1500				
2	102	16-SEP-26	Shipped	203	2
900	1800				

CUSTOMER_ID	ORDER_ID	ORDER_DAT	ORDER_STATUS	PRODUCT_ID	QUANTITY
3	103	17-SEP-26	Processing	204	4
800	3200				

4	104	18-SEP-26	Delivered	205	3
500	1500				
5	105	19-SEP-26	Pending	201	1
500	500				

CUSTOMER_ID	ORDER_ID	ORDER_DAT	ORDER_STATUS	PRODUCT_ID	QUANTITY
5	105	19-SEP-26	Pending	203	2
1125	2250				

9. Customer-wise Order Summary

```
SQL> SELECT
  2     o.Order_ID,
  3     o.Customer_ID,
  4     o.Order_Date,
  5     o.Total_Amount,
  6     od.Product_ID,
  7     od.Quantity,
  8     od.Unit_Price,
  9     od.Subtotal
 10 FROM Meesho_Orders o
 11 JOIN Meesho_Order_Details od
 12 ON o.Order_ID = od.Order_ID
 13 ORDER BY o.Order_Date;
```

ORDER_ID	CUSTOMER_ID	ORDER_DAT	TOTAL_AMOUNT	PRODUCT_ID	QUANTITY	UNIT_PRICE

SUBTOTAL						

1001 1998	1	20-SEP-26	1099	101	2	999
1003 799	3	22-SEP-26	799	103	1	799
1004 1299	1	23-SEP-26	1299	104	1	1299