

Project Code:	ATA-01
Project Name:	Automation of Travel Agency

Revision History

Version (x.yy)	Date of Revision	Description of Change	Reason for Change	Affected Sections	Approved By
1.0	Apr-2013	Initial Draft			
2.10	Sept-2013	Revision	Mapping with CPC Tool		
2.20	Nov-2013	Revision	Aligning with UCF		
2.2.1	Jun-2014	Revision			

Affected Groups

Development Engineering
Quality Assurance
XYZ Corp

List of Reference Documents

Name	Version No.
1.RS_ATA	2.20
2.FS_ATA	2.20
3.	
4.	

Prepared by/Date

Reviewed by/Date

Approved by/Date

Table of Contents

TABLE OF CONTENTS	2
1. INTRODUCTION	3
1.1 Background.....	3
1.2 Purpose.....	3
1.3 Scope.....	3
2. GLOBAL DATA STRUCTURES AND SHARED DATA FUNCTIONS.....	4
3. HIGH LEVEL DESIGN.....	4
3.1 Use Case Diagrams.....	5
3.2 Use case Definition.....	6
3.3 Class Diagram	7
3.4 Sequence Diagram	7
3.5 Packages / Classes / Interface	9
3.6 UI Templates.....	13
4. CRITICAL FUNCTIONS AND FOCUS FOR TESTING	16
5. LIMITATIONS	16
6. APPENDIX.....	16
1. Table: ATA_TBL_User_Credentials	16
2. Table: ATA_TBL_User_Profile	16
3. Table: ATA_TBL_Vehicle	16
4. Table: ATA_TBL_Driver	17
5. Table: ATA_TBL_Route	17
6. Table: ATA_TBL_Reservation	17
7. Table: ATA_TBL_CreditCard.....	18
Database Sequences.....	18

1. Introduction

1.1 Background

XYZ Travels Ltd. provides vehicle booking facilities to users (Customers) across many cities.

1.2 Purpose


XYZ Travels Ltd. plans to develop "Automation of Travel Agency" - standalone/web application [Core Java Batches - Swing Application; J2EE Batches - Web Application], where users (Customers) can reserve vehicles and manage their reservations.

1.3 Scope

The scope of the Automation of Travel Agency (ATA) will be to provide the functionality as described below. The system will be developed on a Windows operating system using Java/J2EE.

2. Global Data Structures and Shared Data Functions

This section describes the structure of 9 tables to be used for the implementation of requirements as stated in the specification.

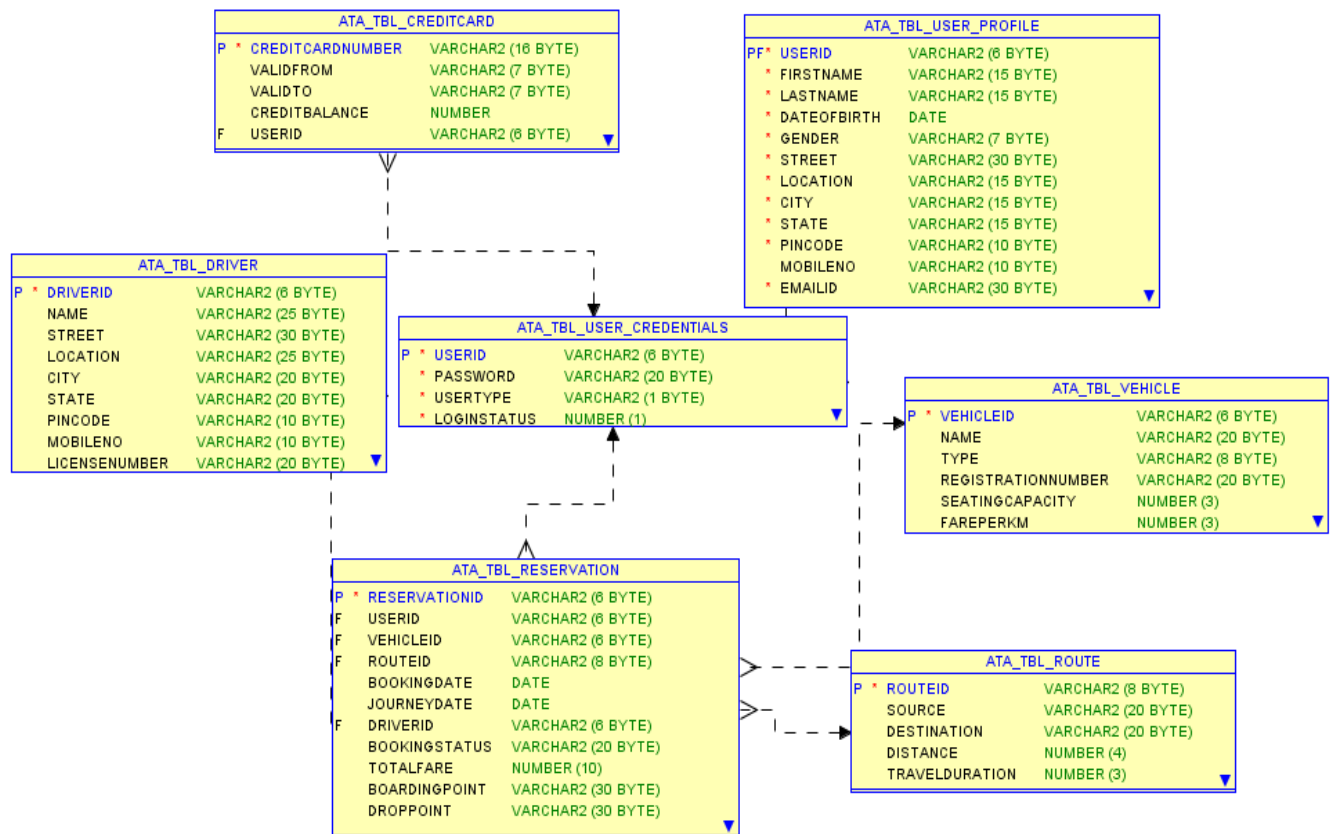


3. High Level Design

This section describes the high level design diagrams. Use case diagram with Use Case definition, Sequence Diagram and Class Diagram which provides a visual representation of the requirements, logical flow and their class representations.


3.1 Use Case Diagrams

The requirements of a system can be represented using a use case model in the Use Case Diagram. The use case diagram for the actors of this case study is given as below.

3.1.1 Use Case Diagram for Admin

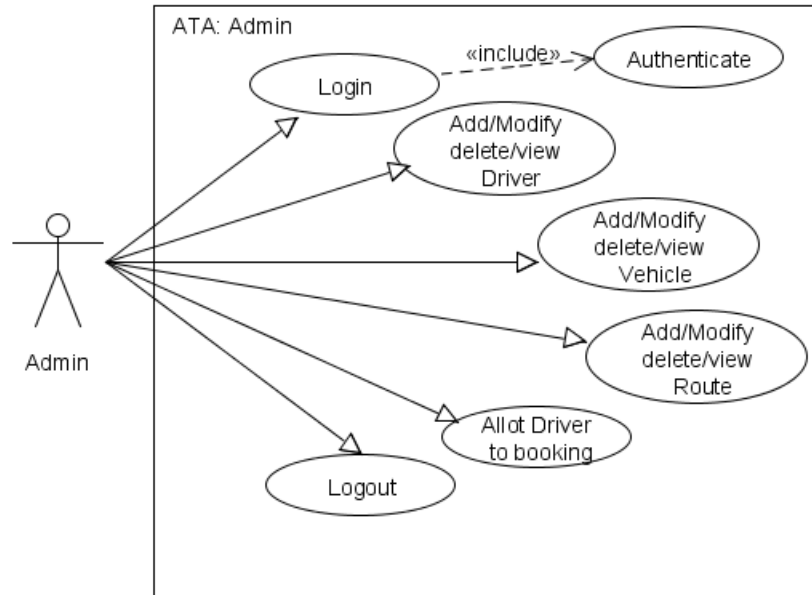

3.1.2 Use Case Diagram for Customer

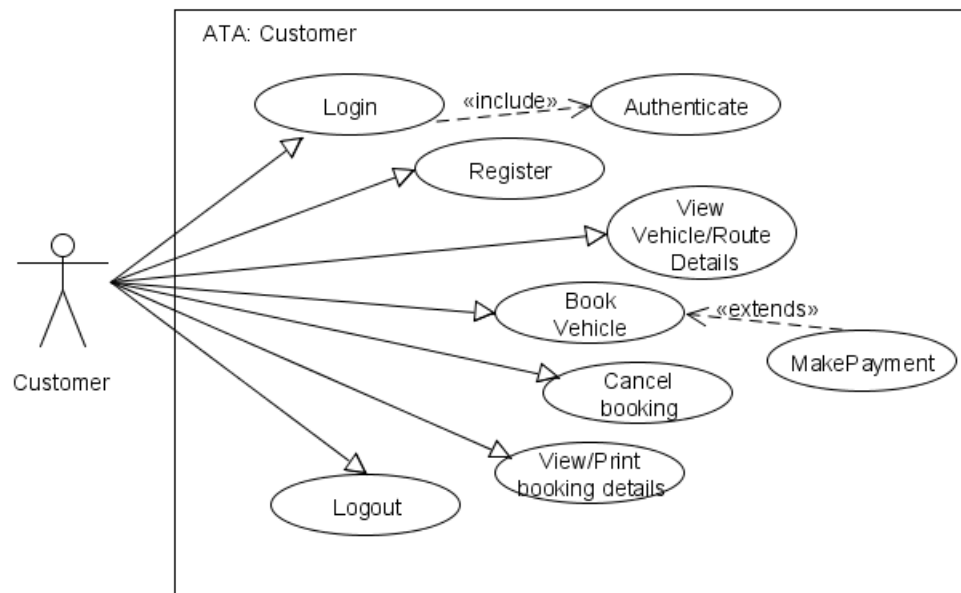

3.2 Use case Definition

Generally, in a design document, Use case definitions should be written for all the *Requirements* of the system.

Note: Participants are expected to document use case definitions for all requirements. However, for few requirements documented below for reference.

Below table explains 'Use Case' definition for requirement "AA-001" - Login operation for all users.

3.2.1 Login

USE CASE #	AA-001 <i>Login</i>	
Goal	<i>All users logging into the system should be authenticated using a unique login-id and password (operations to be supported based on type of user)</i>	
Preconditions	If the user type is 'Admin', credential details should exist. If the user type is 'Customer', he/she should be registered by the administrator.	
Success End Condition	If the user type is 'Admin', then redirect to the Admin page. If the user type is 'Customer', then redirect to the Customer page.	
Failed End Condition	<i>The end user is redirected to an Error Page, and/or is asked to re-enter login credentials.</i>	
Primary, Secondary Actors	Admin, Customer.	
Trigger	<i>Login button</i>	
DESCRIPTION	Step	Action
	1	<i>Enter Login credentials (id & password)</i>
	2	<i>Click on Login button</i>
	3	<i>If id & password is Success, then identify user type Display appropriate(Admin/Customer) home page</i>
	Step	Branching Action
	1	<i>If 'id' is not existing then return with requesting for registration</i>
	2	<i>If password is not matching return with suitable error message say 'Re-enter id & password'</i>
Related Information/Use cases	<i>Not Applicable</i>	
Priority	<i>P1</i>	
Performance	<i>5 seconds</i>	
Frequency	<i>10 / hour</i>	
Assumptions	Admin/Customer login credentials are available in the database and others are already registered with their credentials	

Below table explains 'Use Case' definition for requirement "AD-001" – ADD Vehicle Details operation for Admin user only.

3.2.2 ADD Vehicle Details

USE CASE #	AD-001 <i>Add Vehicle details</i>	
Goal	<i>To enable Administrator to create and add new Vehicle</i>	
Preconditions	Administrator must be logged in to be able to create a new Vehicle.	
Success End Condition	<i>"Redirect to Admin home page"</i>	
Failed End Condition	<i>"Redirect to Error Page"</i>	
Primary, Secondary Actors	<i>Administrator</i>	
Trigger	<i>'Add Vehicle button</i>	
DESCRIPTION	Step	Action
	1	<i>Provide appropriate vehicle details</i>
	2	<i>Click on Add Vehicle button</i>
	Step	Branching Action
	1	<i>If failed to add vehicle details</i>
	2	<i>Display appropriate message to the admin</i>
Related Information/Use cases	<i>Not applicable</i>	
Priority	<i>P1</i>	
Performance	<i>Approx. 4 sec</i>	
Frequency	<i>2 / Month</i>	
Assumptions	<i>Admin login credentials are available in the database</i>	

3.3 Class Diagram

The class diagram is a very basic concept in object-oriented world. Class diagrams demonstrate a model, describing what attributes and behavior it has rather than describing the methods for accomplishing operations. Class diagrams are very useful in representing relationships between classes and interfaces.


<class diagram to be drawn by RLL participants>

3.4 Sequence Diagram


A graphical representation of a module's function invoking functions of other modules in order to achieve a task (specific user requirement) is called a sequence diagram. A sequence diagram for the authentication process is given below for reference. The below example is for a Web Application using servlets/jsp.

3.4.1 Add Driver details:

Admin performing add Driver details.

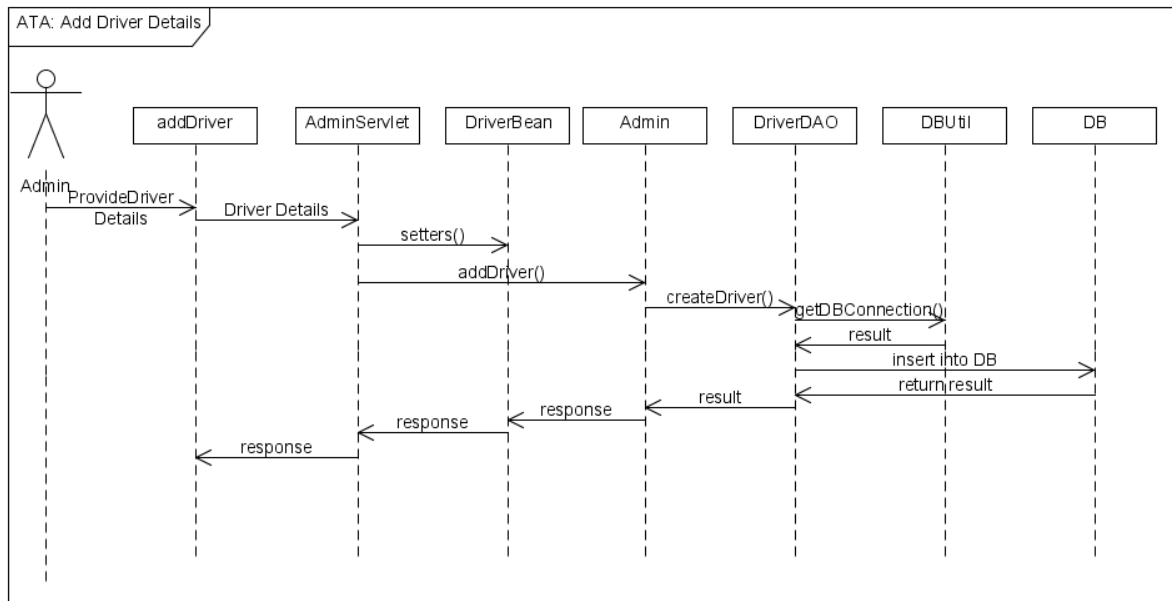**3.4.2 Add Driver details:**

Customer performing view booking.

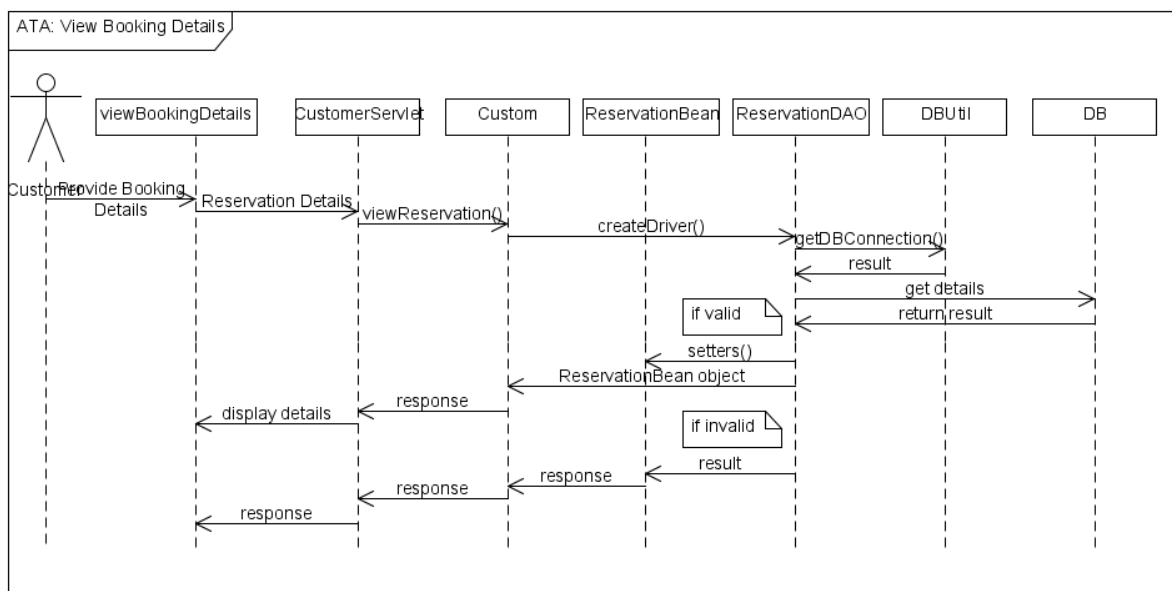

3.5 Packages / Classes / Interface

This section provides a brief outlook on the packaging hierarchy along with the respective classes to be used for the implementation.

The 4 packages mentioned below are for both GUI and Web Application.

Packages	
Package	Description
com.wipro.ata.service	This package contains all the Service classes
com.wipro.ata.bean	This package contains all the bean classes
com.wipro.ata.dao	This package contains all the DAO functionality classes
com.wipro.ata.util	This package contains all the generic functionality classes

This package is used only for a GUI application.

com.wipro.ata.ui	This package contains all the UI related classes [For Core Java]
-------------------------	--

The package for the controller class should be used as below based on the type of application

com.wipro.ata.listener	listener - core java
or	
com.wipro.ata.servlet	servlet - Web Applications
or	
com.wipro.ata.action	action - Struts
or	
com.wipro.ata.controller	controller - Spring

Package com.wipro. ata.bean

Class Name	Attributes	Data Type
ProfileBean	userID	String
	firstName	String
	lastName	String
	dateOfBirth	Date
	gender	String
	street	String
	location	String
	city	String
	state	String
	pincode	String
	mobileNo	String
	emailID	String
	password	String

CredentialsBean	userID	String
	password	String
	userType	String
	loginStatus	int

DriverBean	driverID	String
	name	String
	street	String
	location	String
	city	String
	state	String
	pincode	String
	mobileNo	String
	licenseNumber	String

ReservationBean	reservationID	String
	userID	String
	routeID	String
	bookingDate	Date
	journeyDate	Date
	vehicleID	String
	driverID	String

	bookingStatus	String
	totalFare	double
	boardingPoint	String
	dropPoint	String

RouteBean	routeID	String
	source	String
	destination	String
	distance	int
	travelDuration	int

VehicleBean	vehicleID	String
	name	String
	type	String
	registrationNumber	String
	seatingCapacity	int
	farePerKM	double

Package com.wipro.ata.service

Interface Summary	
Interface	Description
Administrator	<p>Entity interface for Administrator dealing with the admin process functionalities</p> <div> Method Summary String addVehicle(VehicleBean vehicleBean) int deleteVehicle(ArrayList<String> vehicleID) VehicleBean viewVehicle(String vehicleID) boolean modifyVehicle(VehicleBean vehicleBean) String addDriver(DriverBean driverBean) int deleteDriver(ArrayList<String> driverID) boolean allotDriver(String reservationID, String driverID) boolean modifyDriver(DriverBean driverBean) String addRoute(RouteBean routeBean) int deleteRoute(ArrayList<String> routeID) RouteBean viewRoute(String routeID) </div>

	boolean modifyRoute (RouteBean routeBean) ArrayList<ReservationBean> viewBookingDetails (Date journeyDate,String source, String destination)
Customer	Entity interface of Customer for dealing with the Customer process functionalities Method Summary ArrayList<VehicleBean> viewVehiclesByType (String vehicleType) ArrayList<VehicleBean> viewVehicleBySeats (int noOfSeats) ArrayList<RouteBean> viewAllRoutes () String bookVehicle (ReservationBean reservationBean) boolean cancelBooking (String userID, String reservationID) ReservationBean viewBookingDetails (String reservationID) ReservationBean printBookingDetails (String reservationID)

Package com.wipro.ata.dao

Find below the suggestive approach for CRUD operations [method naming & signature] for the DAO Interface/classes. Create the necessary DAO classes.

Interface Name	Description
xyzDAO	DAO interface/class to deal with operations related to the specific table. Method Summary String createXYZ(BeanoObject) int deleteXYZ(ArrayList<String>) boolean updateXYZ(BeanoObject) BeanoObject findById(String) ArrayList<BeanoObject> findAll()

- If required, additional find methods can be created.

Package com.wipro.ata.util

Interface Summary	
Interface	Description
Authentication	This interface is responsible for performing the Authentication and Authorization process.
	Methods boolean authenticate (CredentialsBean credentialsBean) String authorize (String userID)

	boolean changeLoginStatus(CredentialsBean credentialsBean, int loginStatus)
DBUtil	This class is responsible for the Database connection establishment.
	Methods static Connection getDBConnection (String driverType)
User	Interface for handling different types of users Method Summary String login(CredentialsBean credentialsBean) Return value must be either: "A", "C", "FAIL", "INVALID" A->Admin, C->Customer Wrong username/password should return INVALID. boolean logout (String userId) String changePassword(CredentialsBean credentialsBean, String newPassword) Return value must be either: "SUCCESS", "FAIL", "INVALID" String register (ProfileBean profileBean) Return value must be either: <userId of length 6>, "FAIL" Note: userId-> first 2 letter of first name followed by 4 digit auto generated number
Payment	Class for handling payment related information String creditCardNumber, validFrom, validTo, double balance Methods boolean findByCardNumber (String userID, String cardNumber) String process (Payment payment)

Note: **Wherever empty or NULL is the response in all such cases suitable message has to be displayed for user**

3.6 UI Templates

3.6.1 UI Principle

The UI [Presentation Layer] should be designed with the below mentioned principles which helps easy interaction by the user to the application.

3.6.2 UI controls and Usage Principle

UI Type	Controls	Description
Direct Entry	Text Box, Text Area	Any input that cannot be predicted and needs the user to key in. e.g Name, Address, contact no etc.
Static Selection	Option Button, Check Box, Drop Down	Should be used where the input can be predefined. e.g gender, month [Jan – Dec] etc. If number of items is more, drop down is preferred.
Dynamic Selection	Drop Down	The items for the drop down should be retrieved from a stored data. e.g Displaying Districts in a drop down from places table.

Automation	Label Text Field [Read Only]	Data's that are calculative or an output of a function. e.g : Displaying system date, showing total amount etc.
Decision Control	Button	Operations like submit, save, clear should be executed only upon clicking respective buttons.

3.6.3 UI Template

This section contains the design template for the website home page [Fig. 1] that will be displayed at the time of opening this web application and Actor specific home page [Fig. 2].

<logo>	< Project Title >	
		About Us Contact Us
< General Info >		<div> <div>Login</div> <div> <input type="text"/> </div> <div> <input type="password"/> </div> <div> <input type="checkbox"/> Remember me on this computer </div> <div>Login</div> <div> Forgot your password? Click here to reset it. </div> <div> New User? Register Here </div> </div>
		Copyright @ 2014 Wipro Technologies. All rights reserved

Fig. 1 - Main Page [First Page to open]

<logo>	< Project Title >	
< Logged in Name >	Home	Logout
<Navigation Links>	< Page based on the navigation link selected>	
<Navigation Links>		
<Navigation Links>		
<Navigation Links>		
<Navigation Links>		
<Navigation Links>		
Copyright @ 2014 Wipro Technologies. All rights reserved		

Fig. 2 - Home Page for Actor

<logo>	< Project Title >						
< Logged in Name >	Home	Logout					
< Title for the View Screen >							
<Col Head>	<Col Head>	<Col Head>	<Col Head>	<Col Head>	<Col Head>		
						Edit	Delete
						Edit	Delete
						Edit	Delete
						Edit	Delete
						Edit	Delete
						Edit	Delete
						Edit	Delete
Copyright © 2014 Wipro Technologies. All rights reserved							

Fig. 3 – View Screen with Edit and Delete Functionality

4. Critical Functions and Focus for Testing

login(), addVehicle(), reservation(), makePayment(), cancelTicket().

5. Limitations

- Booking vehicle is on daily basis (no hourly booking is permitted).
- Driver allocation will be done only by the Admin but not Customer.
- Return journey booking is not available

6. APPENDIX

1. Table: ATA_TBL_User_Credentials

This table contains Authentication Information for Administrator & Customer

Field Name	Data Type	Description
Userid	VARCHAR2(6)	Primary Key*
Password	VARCHAR2(20)	Not Null
Usertype	VARCHAR2(1)	Either ['A','C']
Loginstatus	NUMBER(1)	Either [1 ,0]

* First 2 letters of First Name followed by 4 digits auto generated number

2. Table: ATA_TBL_User_Profile

This table contains User specific details entered during User Registration.

Field Name	Data Type	Description
Userld*	VARCHAR2(6)	Foreign Key
Firstname	VARCHAR2(15)	Not Null
Lastname	VARCHAR2(15)	Not Null
Dateofbirth	DATE	Not Null
Gender	VARCHAR2(7)	Not Null
Street	VARCHAR2(30)	Not Null
Location	VARCHAR2(15)	Not Null
City	VARCHAR2(15)	Not Null
State	VARCHAR2(15)	Not Null
Pincode	VARCHAR2(6)	Not Null
MobileNo	VARCHAR(10)	Exact 10 digit only
Emailld	VARCHAR2(30)	

* First 2 letters of First Name followed by 4 digits auto generated number

3. Table: ATA_TBL_Vehicle

This table contains Vehicle specific information.

Field Name	Data Type	Description
vehicleId*	VARCHAR2(6)	Primary Key
Name	VARCHAR2(20)	Not Null
Type	VARCHAR2(8)	Not Null
RegistrationNumber	VARCHAR2(12)	Not Null
SeatingCapacity	NUMBER(3)	Not Null
FarePerKM	NUMBER(3)	

* Id should be First 2 letters of VehicleName followed by 4 digits auto generated number

4. Table: ATA_TBL_Driver

This table contains Driver details like Name, address & License number etc.

Field Name	Data Type	Description
driverId*	VARCHAR2(6)	Primary Key
Name	VARCHAR2(25)	Not Null, Either[A B]**
Street	VARCHAR2(30)	Not Null
Location	VARCHAR2(15)	Not Null
City	VARCHAR2(15)	Not Null
State	VARCHAR2(15)	Not Null
Pincode	VARCHAR2(6)	Not Null
MobileNo	VARCHAR(10)	Exact 10 digit only
LicenseNumber	VARCHAR2(20)	Unique

* Id should be First 2 letters of First Name followed by 4 digits auto generated number

5. Table: ATA_TBL_Route

This table contains details about route, distance, duration etc.

Field Name	Data Type	Description
routeId*	VARCHAR2 (8)	Primary Key
Source	VARCHAR2(20)	Not Null
Destination	VARCHAR2 (20)	Not Null
Distance	NUMBER(4)	Not Null
TravelDuration	NUMBER(3)	Not Null

* Id should be First 2 letters of Source and 2 letters of destination followed by 4 digits auto generated number

6. Table: ATA_TBL_Reservation

This table contains details about vehicle reservation made by customer.

Field Name	Data Type	Description
reservationId	VARCHAR2 (6)	Primary Key

UserId	VARCHAR2 (6)	Foreign Key
VehicleId	VARCHAR2 (6)	Foreign Key
RouteId	VARCHAR2 (8)	Foreign Key
BookingDate	Date	Not Null
JourneyDate	Date	Not Null
DriverId	VARCHAR2 (6)	Foreign Key
BookingStatus	VARCHAR2 (20)	Not Null
TotalFare	NUMBER(10)	Not Null
BoardingPoint	VARCHAR2(30)	Not Null
DropPoint	VARCHAR2(30)	Not Null

7. Table: ATA_TBL_CreditCard

This table contains CreditCard details of the Customer for booking vehicle.

Field Name	Data Type	Description
CreditCardNumber	VARCHAR(16)	Primary Key
ValidFrom	VARCHAR(7)	Not Null
ValidTo	VARCHAR(7)	Not Null
CreditBalance	NUMBER	Not Null
UserId	VARCHAR(6)	Foreign Key

Database Sequences

Sequence Name	Purpose	Start With
ata_seq_userId	User ID	1000
ata_seq_routeId	Route ID	1000
ata_seq_driverId	Driver ID	1000
ata_seq_vehicleId	Vehicle ID	1000
ata_seq_reservationId	Reservation ID	1000