


A) Assumptions

- Each student register with courses
- Course deliver by one lecturer and lecturer deliver more courses.
- Students can register with exam.
- Courses have multiple exams and exams have multiple courses.
- Students have multiple exams and exam have multiple students

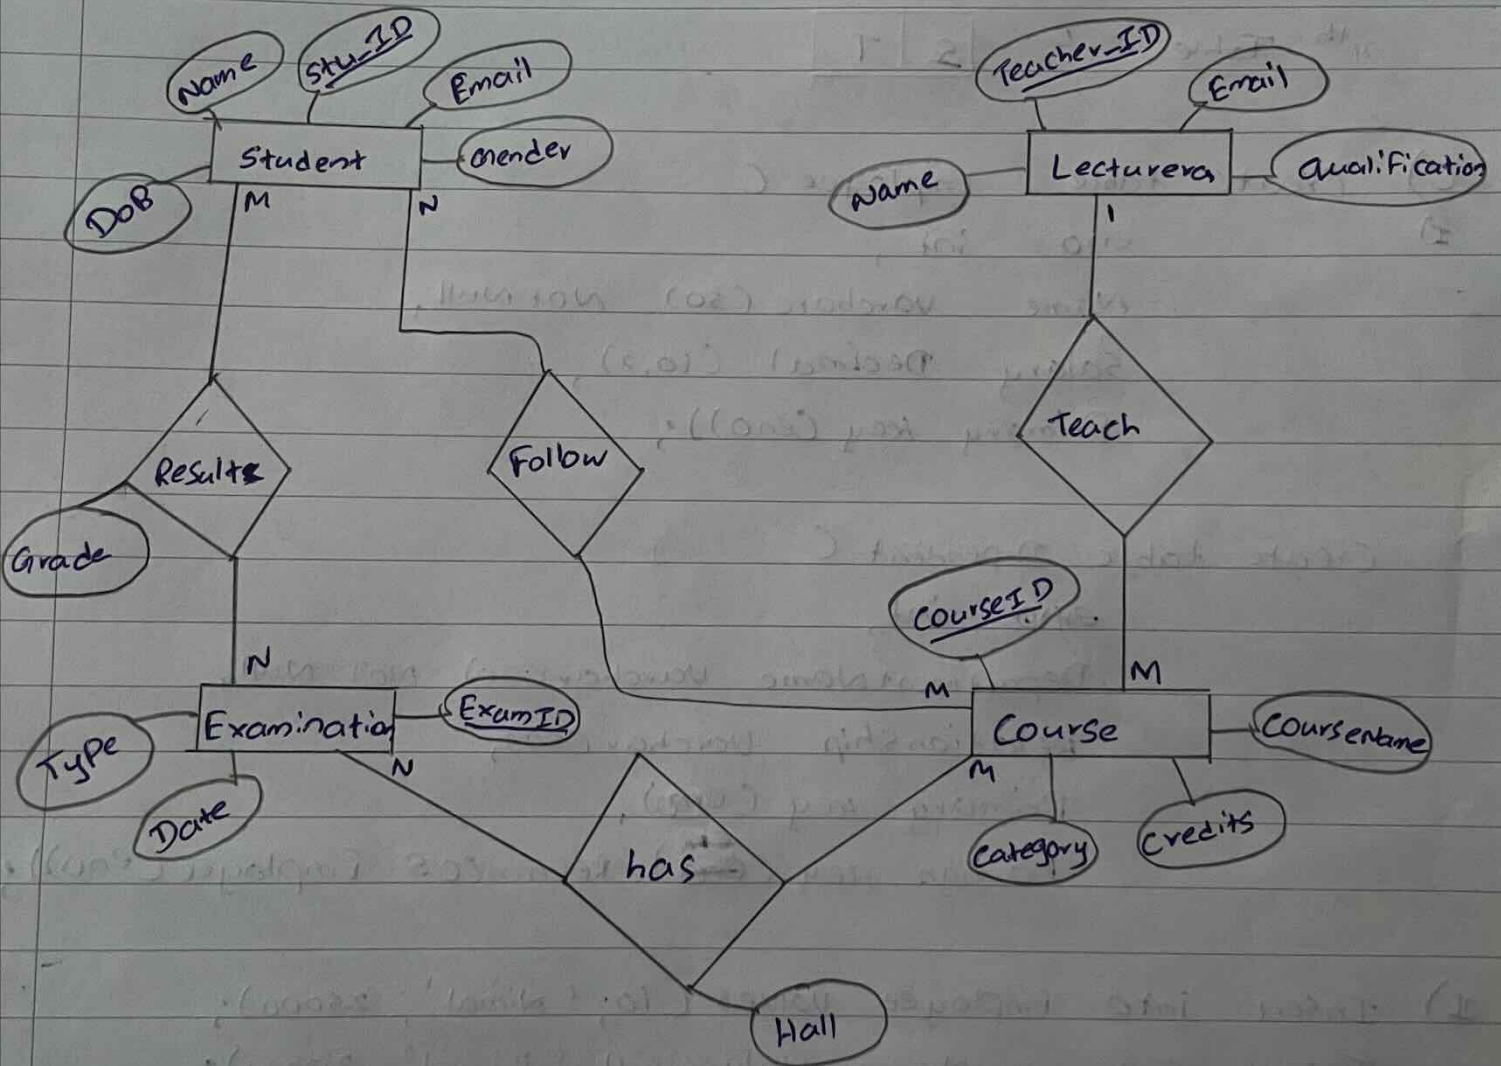

b) 2nd Normal Form

1st Table :-

X	Y	P
---	---	---

2nd Table :-

X	S	U
---	---	---

3rd Table :-

Q	R
---	---

4th Table :-

S	T
---	---

C) Create table Employee C

I) eno int,
Name Varchare (50) Not Null,
Salary Decimal (10,2),
Primary key (eno));

Create table Dependent C

eno int,
DepartmentName Varchar (20) NOT Null,
Relationship Varchar (50),
Primary key (eno),
Foreign key (eno) References Employee (eno));

II) Insert Into Employee values (10, 'Nimal', 25000);

Insert Into Employee values (11, 'Kamal', 30000);

Insert Into Dependent values (10, 'Pithum', 'son');

Insert Into Dependent values (11, 'Rosi', 'wife');

- iii) Select e.Name, d.DependentName From Employee e Join Dependent d
on e.eno = d.eno ;
- iv) Select d.DependentName, d.Relationship From Employee e JOIN
Dependent d ON e.no = d.eno where e.Name = "Erandi" ;
- v) Select Avg(Salary) As AvgSalary From Employee ;
- vi) Select d.DependentName, d.Relationship From Dependent d Join
Employee e on d.eno = e.eno where e.salary = (Select Max(Salary)
From Employee) ;
- vii) Select e.Name, d.DependentName, d.Relationship From Employee e
Join Dependent d ON e.eno = d.eno where e.salary < 20000 ;
- viii) Select * From Employee Order by Salary DESE ;
- ix) Drop :- IF need to delete the table, can use this keyword.
Ex:- Drop table Employee ;
- Delete :- IF need to delete the table data, can use this
keyword with where keyword and Condition.
Ex:- Delete From Employee where eno = 10 ;

d)

- 1) Select s.phno From Stud s Join Res r on s.sno = r.sno
where r.Marks = (Select Min(Marks) From Res) ;
- 2) Select * From Studs Join Res r on s.sno = r.sno where r.Marks >
(Select Avg(Marks) From Res) ;

3) Select S. ~~s~~, r.Marks From Stud S Left Join Res r On S.SNO=r.SNO;

4) Left Join :- Return records from the left table and match with right table

Ex:- Select S.Name, r.Marks From Stud S Left Join Res r On S.SNO = r.SNO;

Right Joins :- Return records from the right table, and the match with the left table.

Ex:- Select S.NO, r.Marks From Stud S Right Join Res r On S.SNO = r.SNO;

Full Joins :- Return all records when there is a match in either left or right table.

5) Create View View_st As Select Sno, Name From Stud where SNO < 45;

6) DELETE :- Remove rows from table and can you select what should be delete using where condition.

Truncate :- Remove all rows from a table quickly. Can not use where condition.

Drop :- Delete the entire table structure and available data.

7) Create table Stude As select * From Stud;

8) Select S.Name, r.Marks From Stud S Join Res r On S.SNO = r.SNO;

9) Select s.Name, r.Marks From stud s Join Res r on s.Sno = r.Sno
Order by r.Marks DESC;

10) Create Procedure Input (

IN P_SNO Int,

IN P_Name Varchare(100),

IN P_Pno Varchare(10),

)

BEGIN

Insert Into stud values (P_SNO, P_Name, P_Pno);

End

Call Input (1, "Kamal", 0773334444);