



SHARP architecture and streaming dataflow

One-second agent windows are encoded locally; identity-aware context and trajectory state connect prediction origins

Current observation window

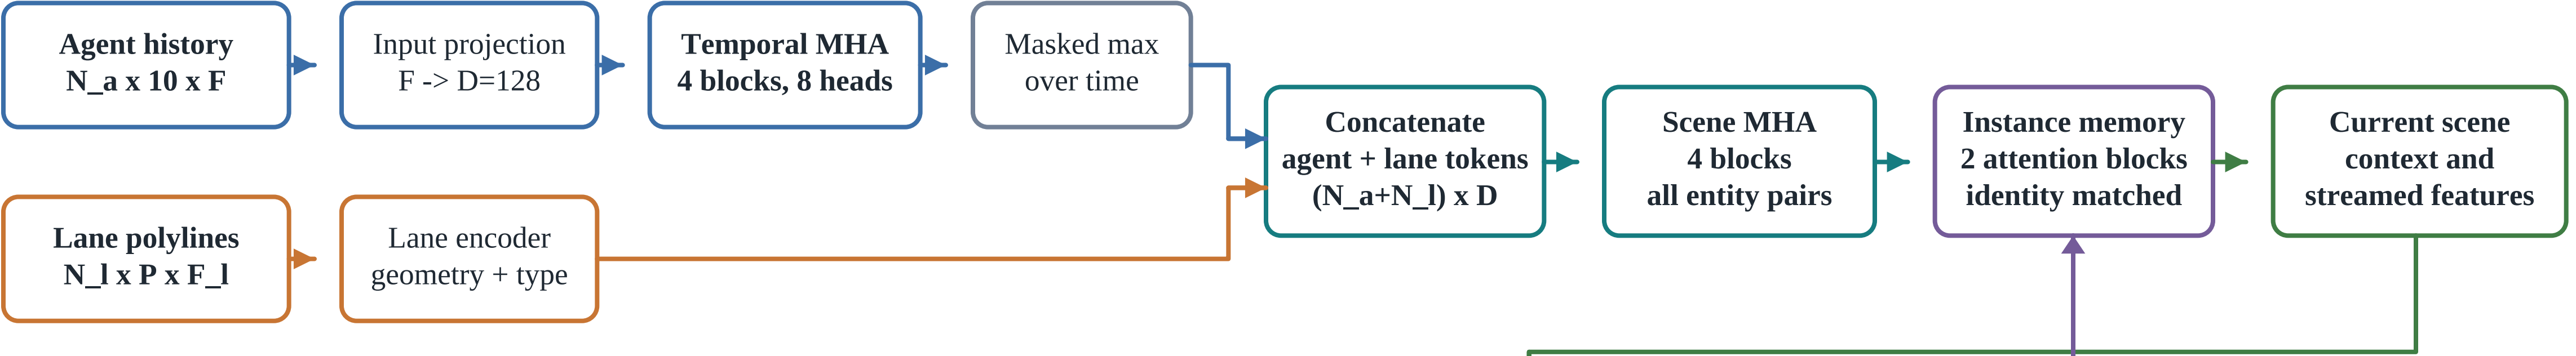

Mode-conditioned prediction

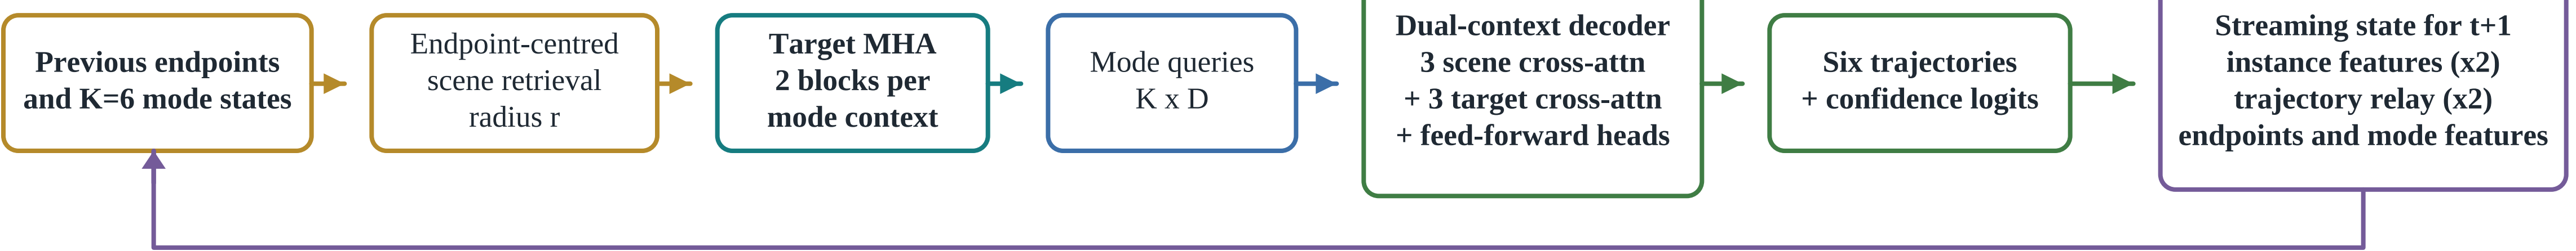

Preserved SHARP mechanisms

short-window encoding | identity-aware memory | endpoint retrieval | trajectory relay | dual streaming/non-streaming training

Attention inventory: 4 temporal + 4 scene + 2 memory + 2 relay + 2 target + 3 scene decoder + 3 target decoder = 20 sites