

[Resources](#) > [Project / Exam](#) > [Metamodel](#) > Statemachonk -- Statemachinemachine

Statemachonk -- Statemachinemachine

Date

Sort by




Marcus Peter Brendel Elmkvist

MetaModel:

```

Class State {
    name/id: string
}
class StateMachine inherit State {
    states: Map (State.name, State)
    currentState: State
    startState: State
}
class Transition{
    source, target: State
    triggerCondition: bool
}
    
```

Graphical:

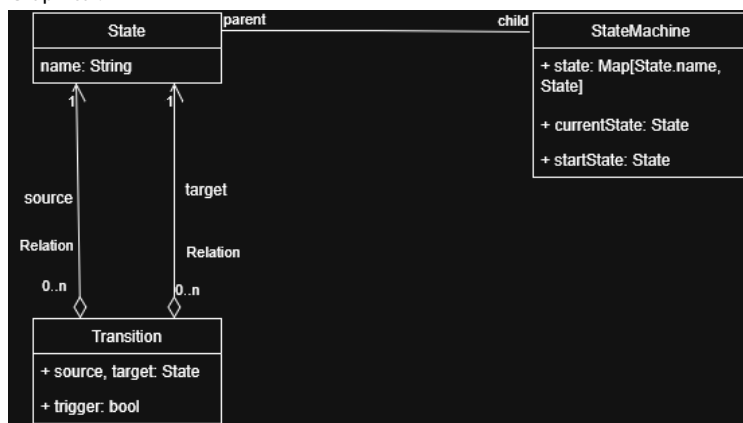

Common Properties:

States





Transitions

Variables



TriggerCondition

Examples:


1. Skyrim Guard

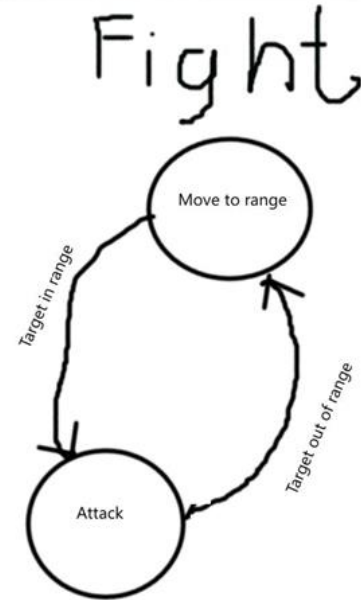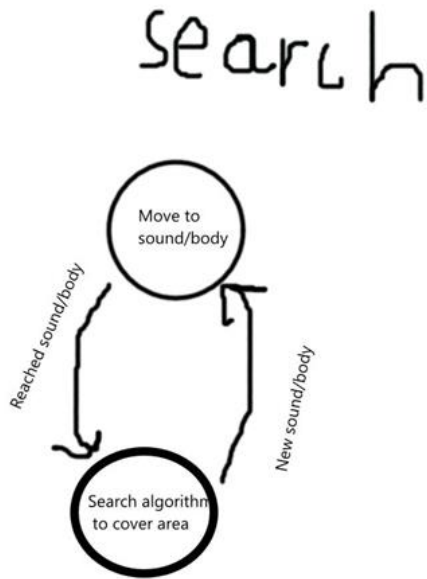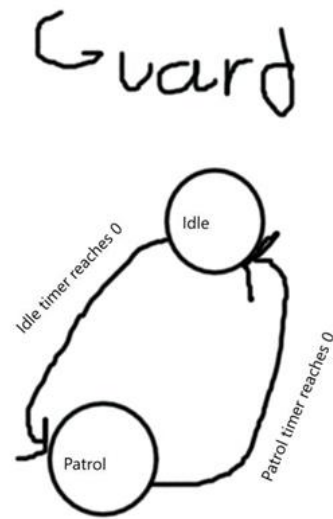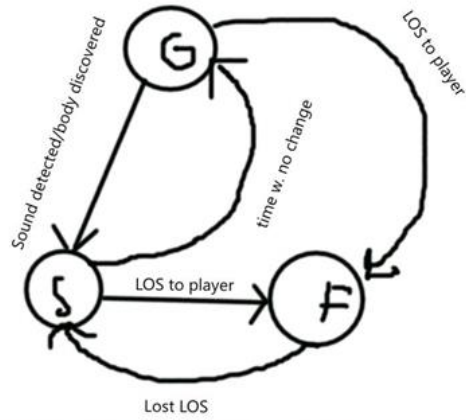

2. Halo Elite

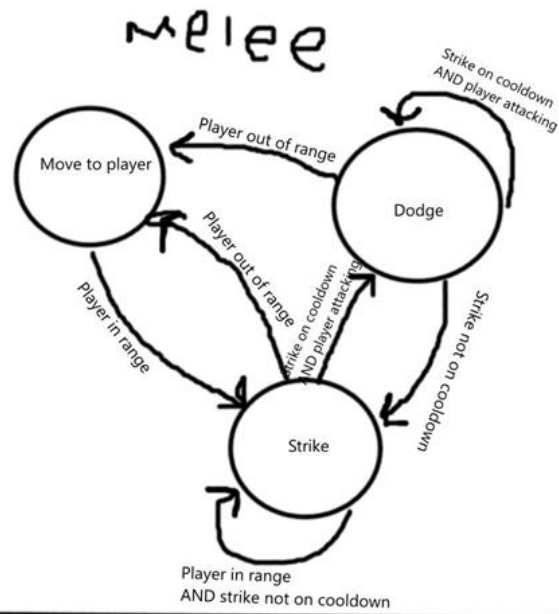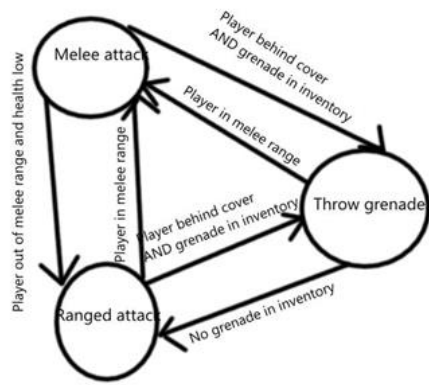

Ranged

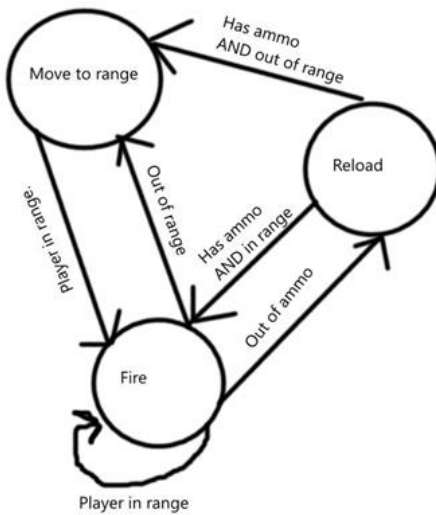

In the two drawings above, we have sketched out some state machines that a designer might want to implement using our DSL. The idea is to make it nested. In the top left corner of each, you see a state machine. Several of its states are themselves state machines, which are detailed in the other windows. In the first example, LOS stands for line of sight, G for guard, S for search, and F for fight.

posted 18-02-2026 15:23



Yoganata Kristanto

The idea looks good and fun to me.

However, I'm not really sure how i would define a metamodel where a statemachine is a state, and a state is a statemachine.

I'll look around a bit, and comeback to you. Otherwise, consider it good.

posted 23-02-2026 23:41