Week 3 – 1:

--Coding-C-Language Features-Optional.

ROLL NO:240801186

Name: MAGESH BAPU P

Q1) Write a program to read two integer values and print true if both the numbers end with the same digit, otherwise print false.

Example: If 698 and 768 are given, program should print true as they both end with 8.

Sample Input 1

25 53

Sample Output 1

false

Sample Input 2

27 77


Sample Output 2

true

Code:

```
Status Finished
             Started Monday, 23 December 2024, 5:33 PM
         Completed Saturday, 26 October 2024, 2:20 PM
            Duration 58 days 3 hours
Question 1
                       Write a program to read two integer values and print true if both the numbers end with the same digit, otherwise print false. Example: If 698
                       and 768 are given, program should print true as they both end with 8. Sample Input 1 25 53 Sample Output 1 false Sample Input 2 27 77
                       Sample Output 2 true
Marked out of
                       Answer: (penalty regime: 0 %)
Flag question
                           1 #include <stdio.h>
                                int main(){
                                    main(){
int a,b;
scanf("%d %d",&a,&b);
int last = a%10;
int laste = b%10;
if (last == laste){
    printf("true");
}
                          10
11
                                         printf("false");
                                    return 0;
                          13
14 }
```


OUTPUT:

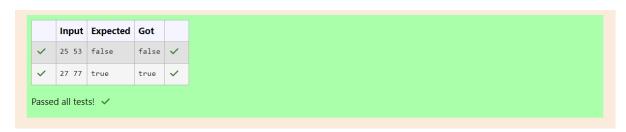

Q2) In this challenge, we're getting started with conditional statements.
Task
Given an integer, n, perform the following conditional actions:
• If n is odd, print Weird
• If n is even and in the inclusive range of 2 to 5, print Not Weird
• If n is even and in the inclusive range of 6 to 20, print Weird
• If n is even and greater than 20, print Not Weird
Complete the stub code provided in your editor to print whether or not n is weird.
Input Format
A single line containing a positive integer, n.
Constraints
• 1 < n < 100
Output Format
Print Weird if the number is weird; otherwise, print Not Weird.
Sample Input 0
3
Sample Output 0
Weird
Code:

```
1 #include <stdio.h>
 2 v int main(){
         int a;
scanf("%d",&a);
 3
 4
 5 🔻
         if (a%2 == 0){
             if (a>=2 && a<=5){
    printf("Not Weird");
 6 🔻
 8
 9 🔻
             else if (a>=6 && a<=20){
                printf("Weird");
10
11
             else if (a>20){
   printf("Not Weird");
12 🔻
13
14
15
         else if (a%2!= 0){
16 🔻
17
             printf("Weird");
18
         else{
19 🔻
20
         printf("Not Weird");
21
22
         return 0;
23 }
```

OUTPUT:

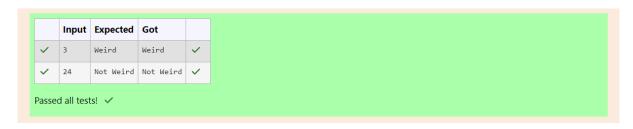

Q3) Three numbers form a Pythagorean triple if the sum of squares of two numbers is equal to
the square of the third.
For example, 3, 5 and 4 form a Pythagorean triple, since $3*3 + 4*4 = 25 = 5*5$
You are given three integers, a, b, and c. They need not be given in increasing order. If
they form a Pythagorean triple, then print "yes", otherwise, print "no". Please note that the
output message is in small letters.
Sample Input 1
3
5
4
Sample Output 1
Yes
Code:

```
1 #include <stdio.h>
 2 v int main(){
        int a,b,c;
 3
        //int ab = a*a+b*b;
 4
        scanf("%d %d %d",&a,&b,&c);
       // int ab = a*a+(b*b);
 6
        if (a>=b && a>=c){
 7 🔻
             int ab = b*b + (c*c);
 8
 9 ,
             if (ab == a*a){
                printf("yes");
 10
 11
 12 •
            else{
            printf("no");
 13
 14
 15
 16 •
         else if(b>=a && b>=c){
            int ab = a*a+(c*c);
 17
 18 🔻
            if (ab == b*b){
                printf("yes");
 19
 20
 21 🔻
            else{
            printf("no");
 22
 23
 24
 25 🔻
         else if(c \ge a \&\& c \ge b){
            int ab = a*a+(b*b);
 26
 27 🔻
            if (ab == c*c){}
 28
               printf("yes");
 29
            else{
 30 •
            printf("no");
 31
 32
 33
           // printf("yes");
 34
 35 ₹
         else{
         printf("no");
 36
 37
 38
         return 0;
 39
40 }
```

OUTPUT:

