


# Identifying behaviorally-relevant dimensions for causal validation of circuit mechanisms

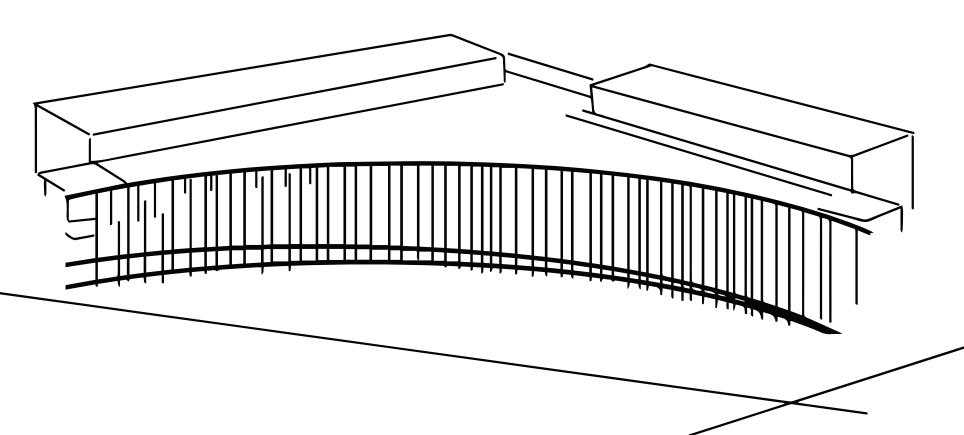

Lewis-Sigler Institute  
for Integrative Genomics

Jiayi Zhang<sup>1</sup>, Tatiana A. Engel<sup>2</sup>


<sup>1</sup>Lewis-Sigler Institute of Integrative Genomics, Princeton University, Princeton, NJ, USA

<sup>2</sup>Princeton Neuroscience Institute, Princeton University, Princeton, NJ, USA




National Institutes of Health  
The BRAIN Initiative®

## Motivations

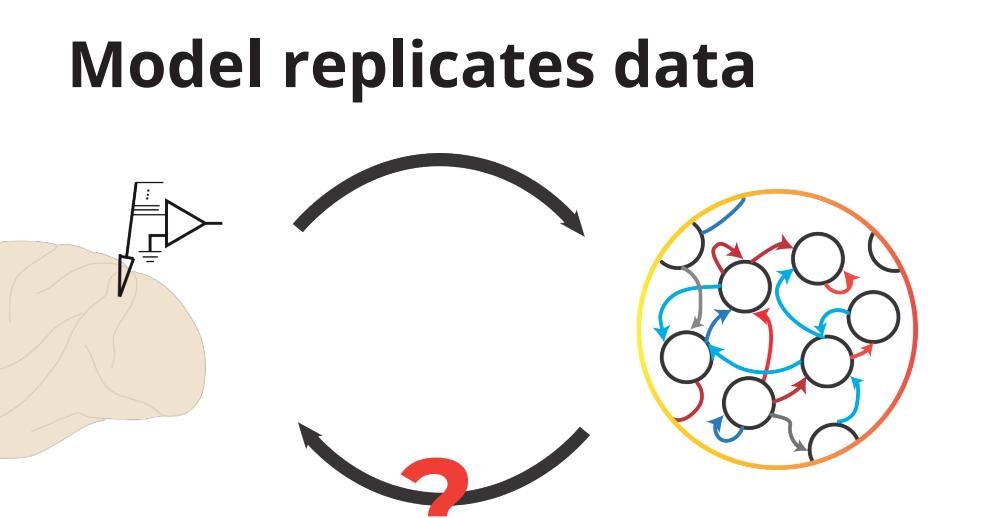

- Model replicates data
- Model guides design of photostimulation
- Optogenetics enables unprecedented precision for observing and perturbing neural circuits in actions.
- Designing perturbations that test current theories or enhance insights into circuit mechanisms remains an open challenge<sup>1</sup>.
- RNNs that replicate observed neural dynamics might serve as "digital twins" of brain circuits<sup>2</sup>.
- Can these digital twins help with designing effective perturbation patterns for causal validation of circuit mechanisms?


## Behavioral twins cannot predict random perturbations

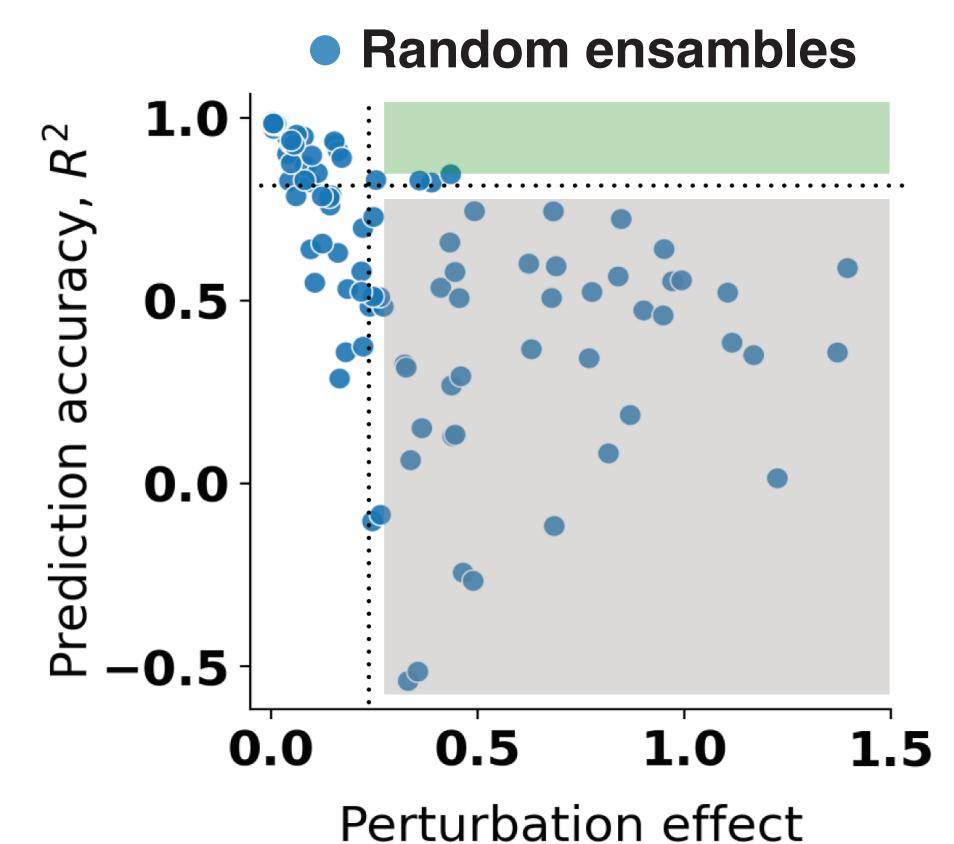

Dream:  
large effect size; accurate predictions


Reality:  
large effect size;  
inaccurate predictions

- Ground-truth (GT): 200-node RNN, trained to perform delayed decision-making task (Dai et al., 2021).
- Twins (500 replicates): 200-node RNNs, trained on the same task as GT and required to replicate GT neural dynamics.
- Paired (random) perturbations: inject the same (out-of-distribution) stimulus to twins and GT; measure  $R^2$  between twin and GT trajectories.


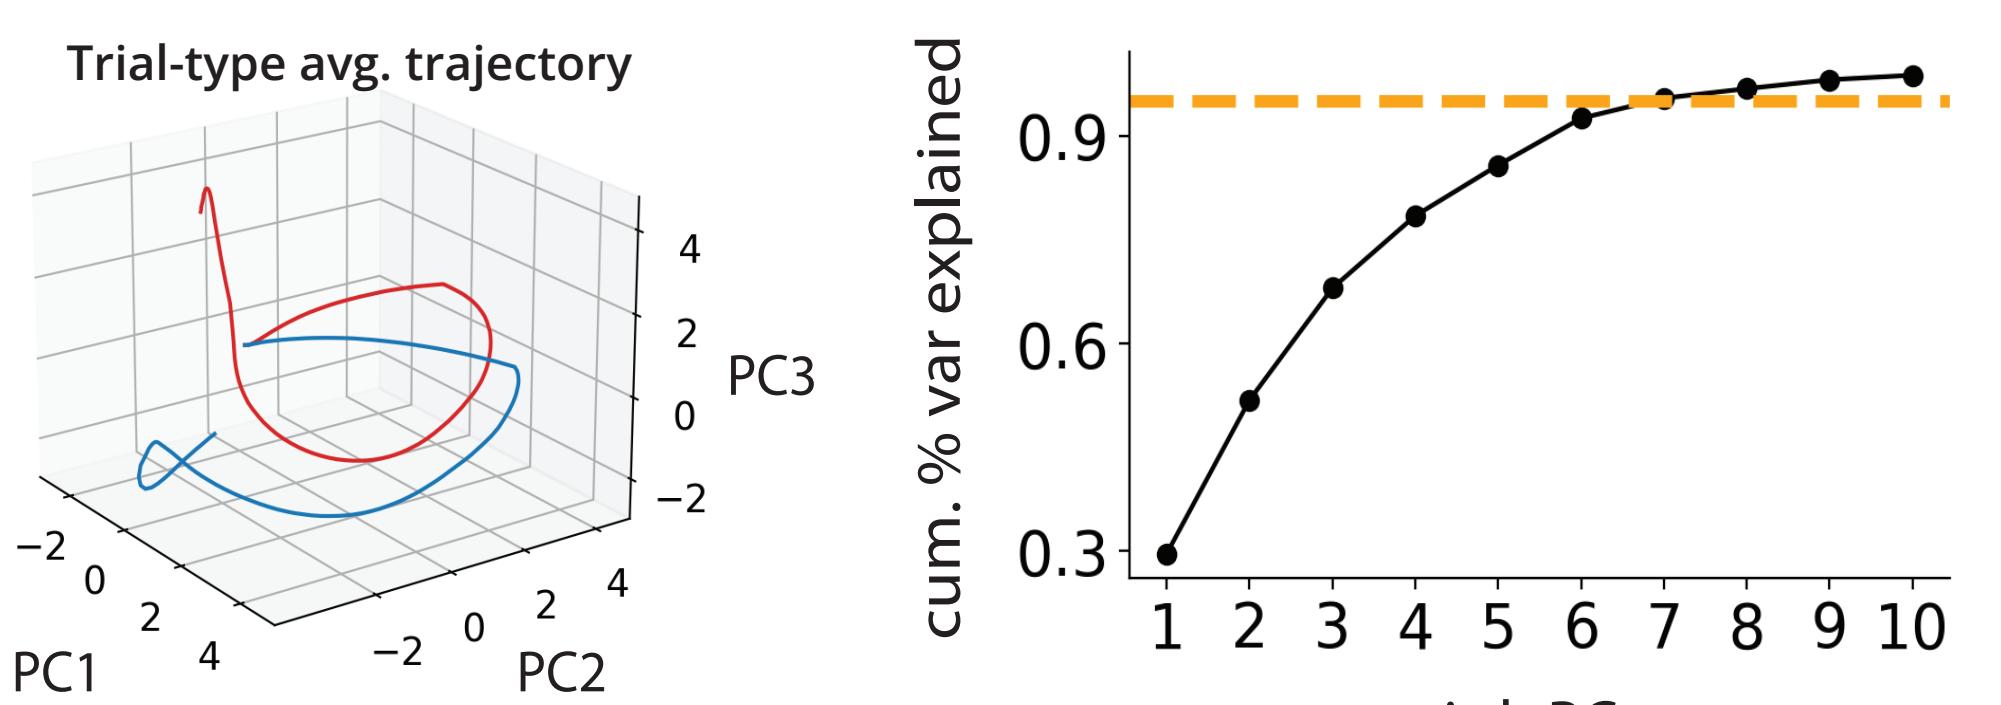


Likely cause: Dim. of data << Dim. of observed units. Low-D data cannot sufficiently constrain the full connectivity of twin models.

## Fitting models of varying dimensionality

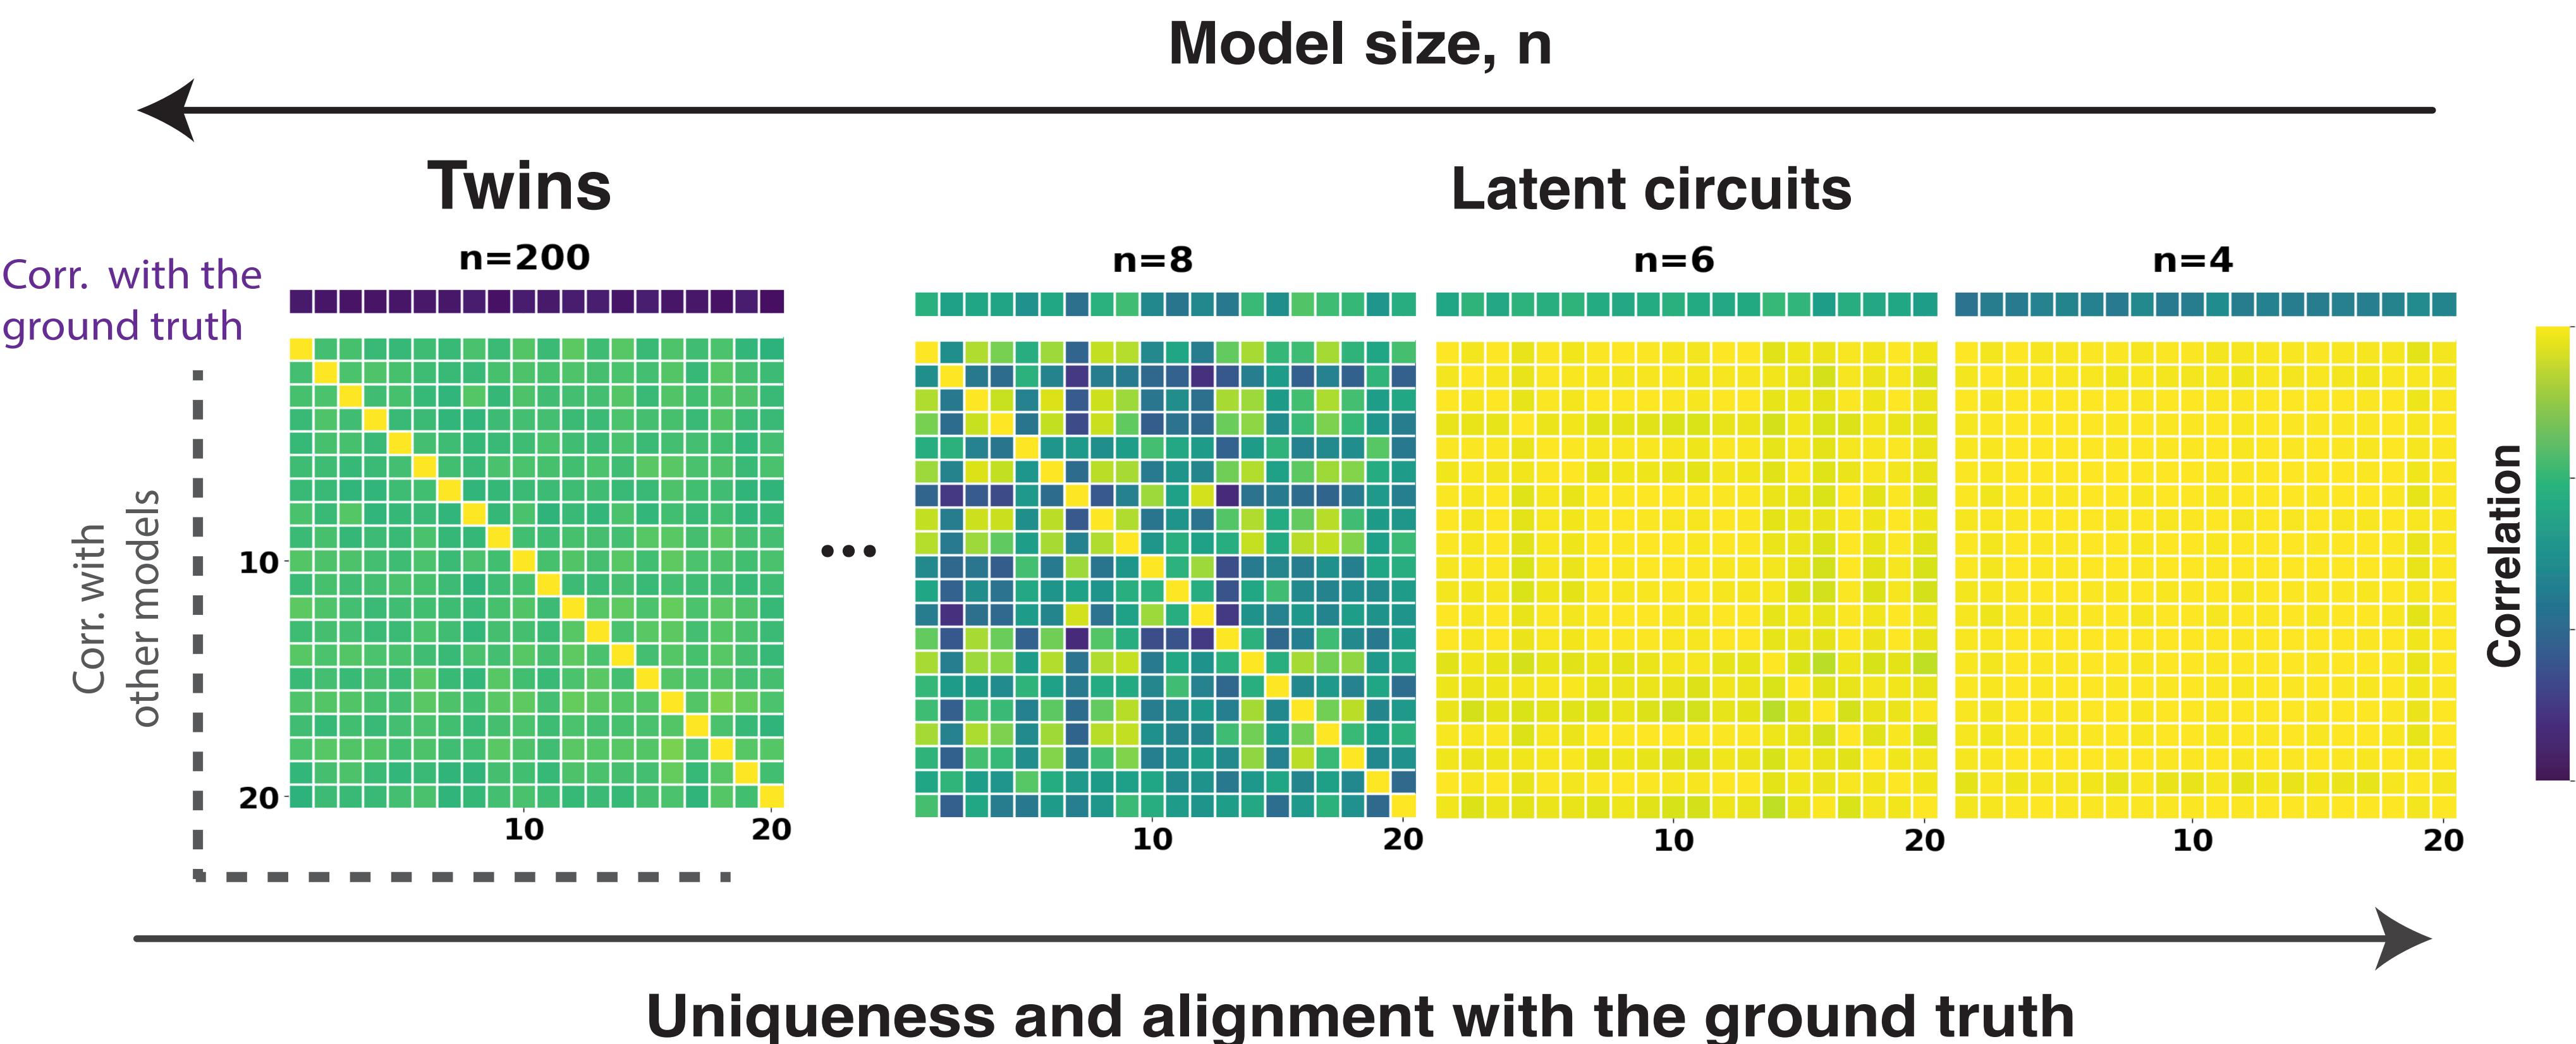


## Data uniquely constrain RNNs in low-D latent space

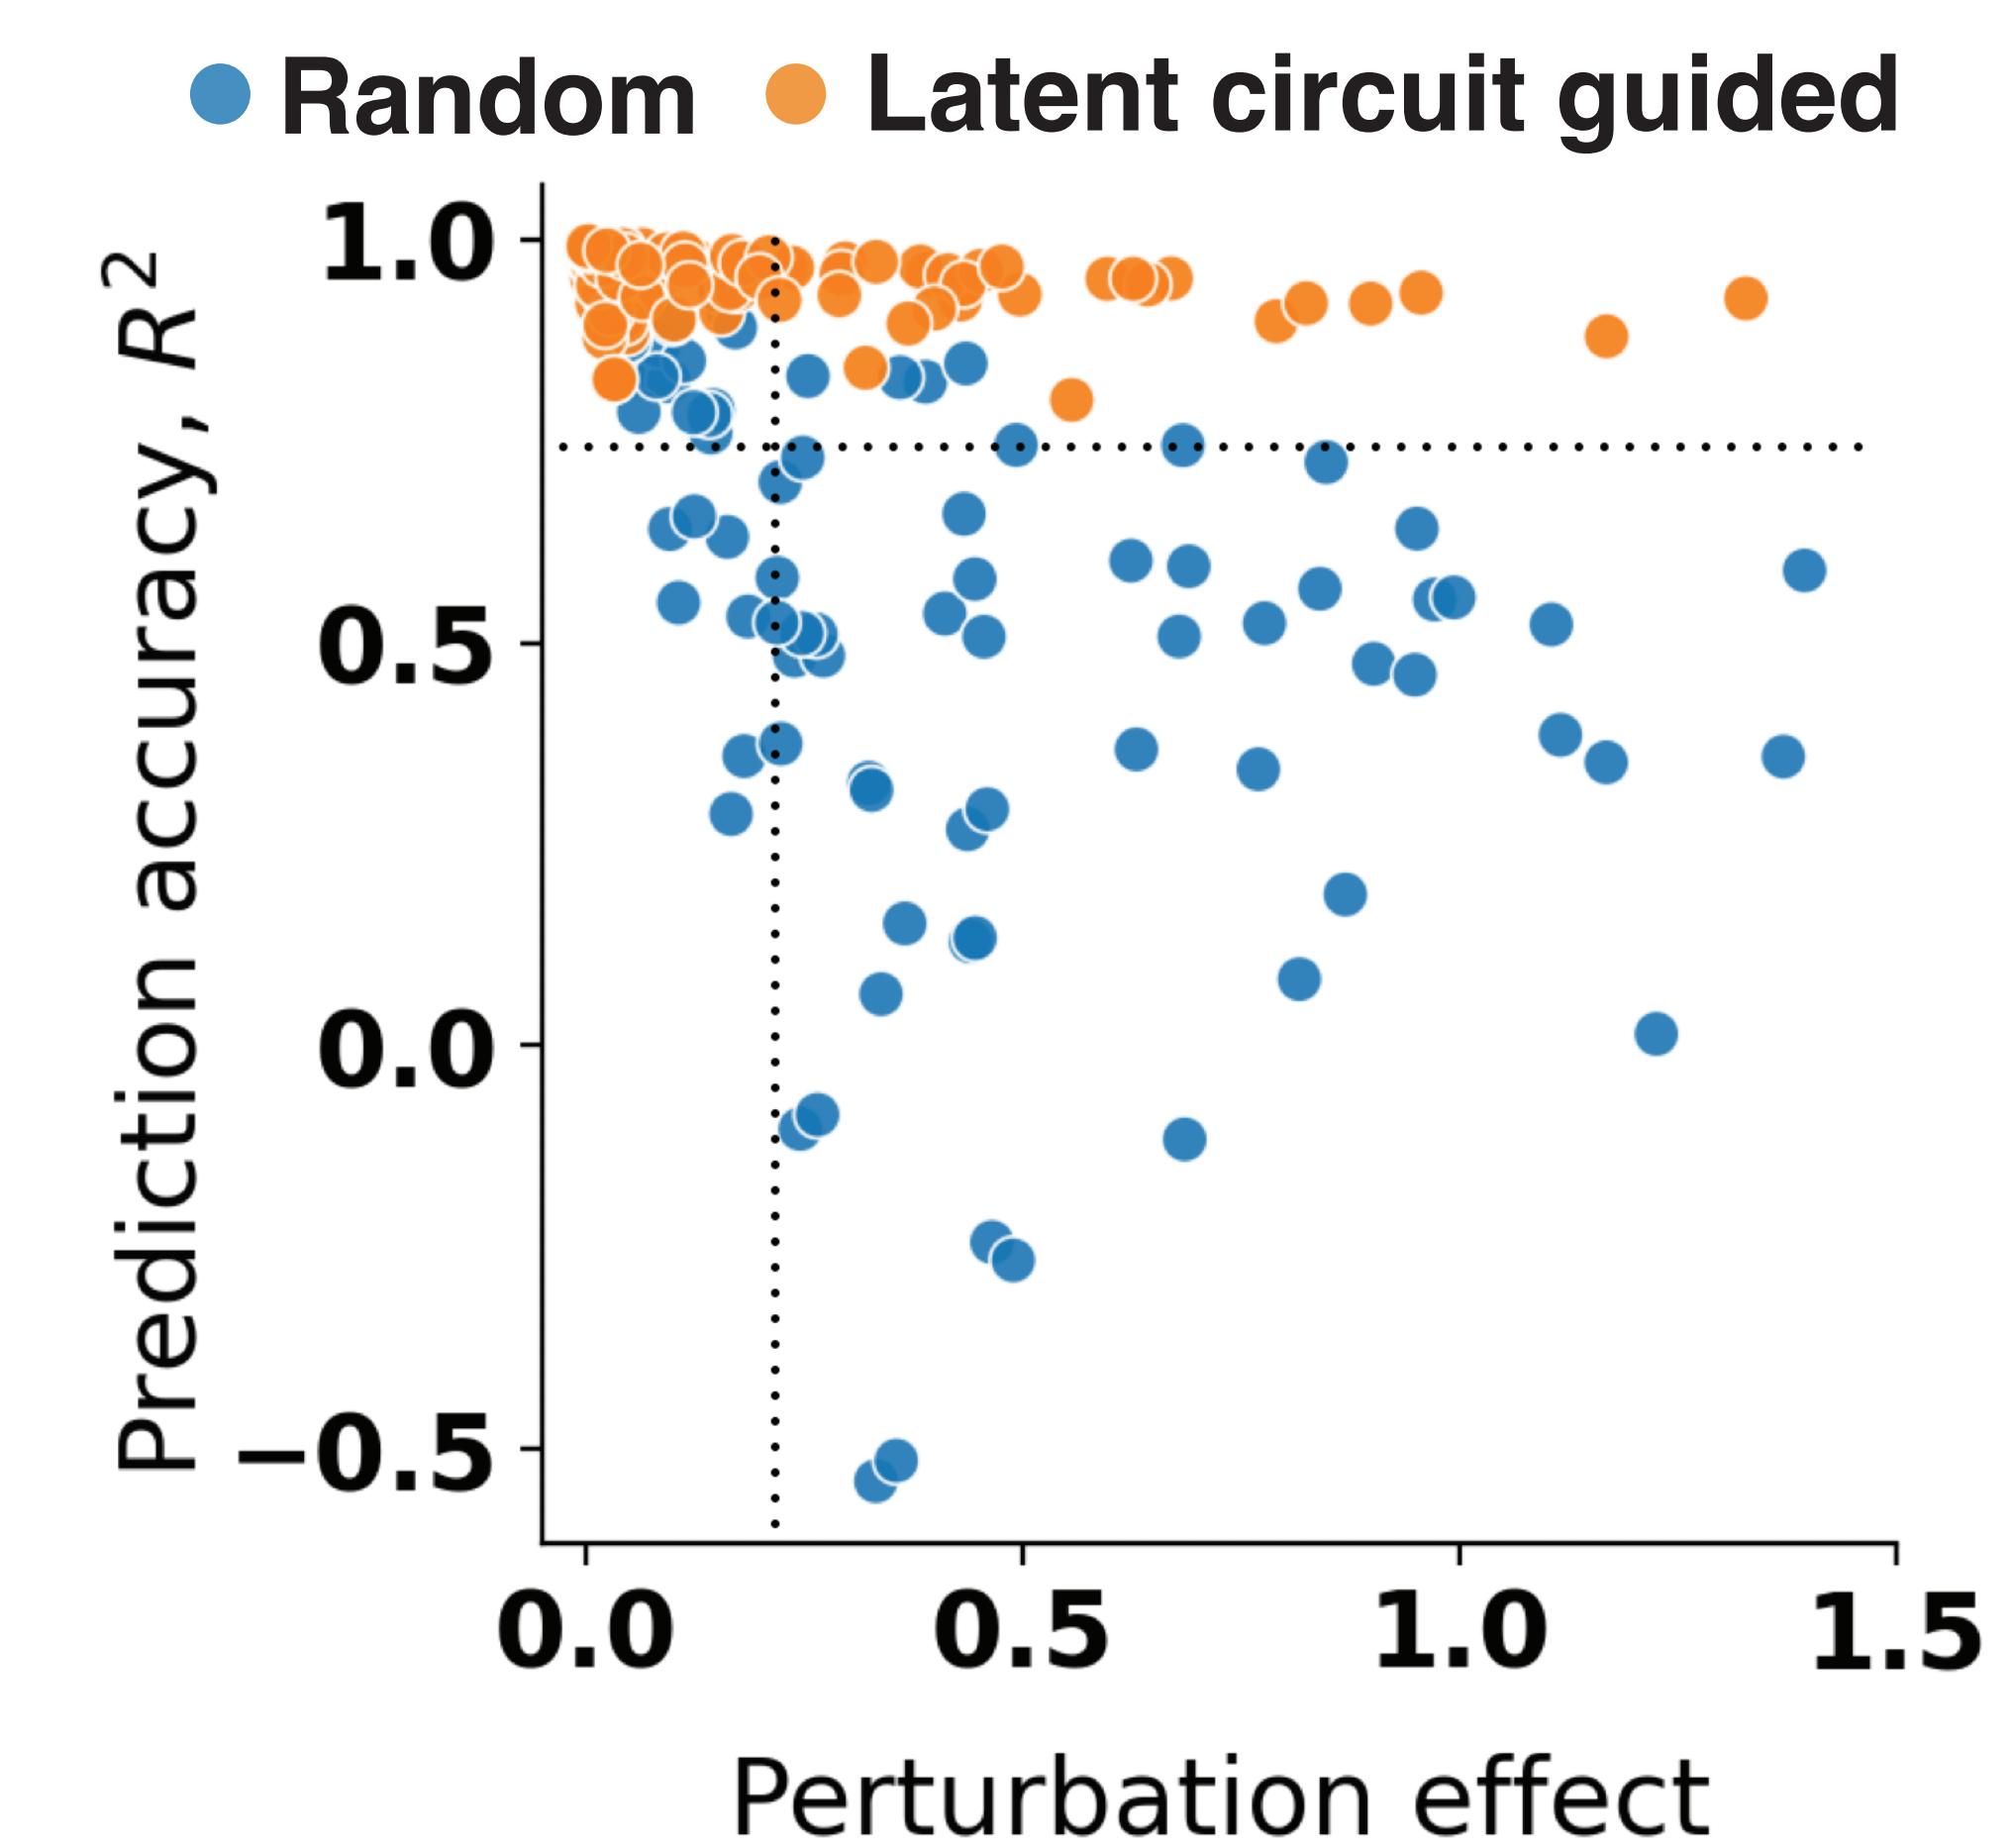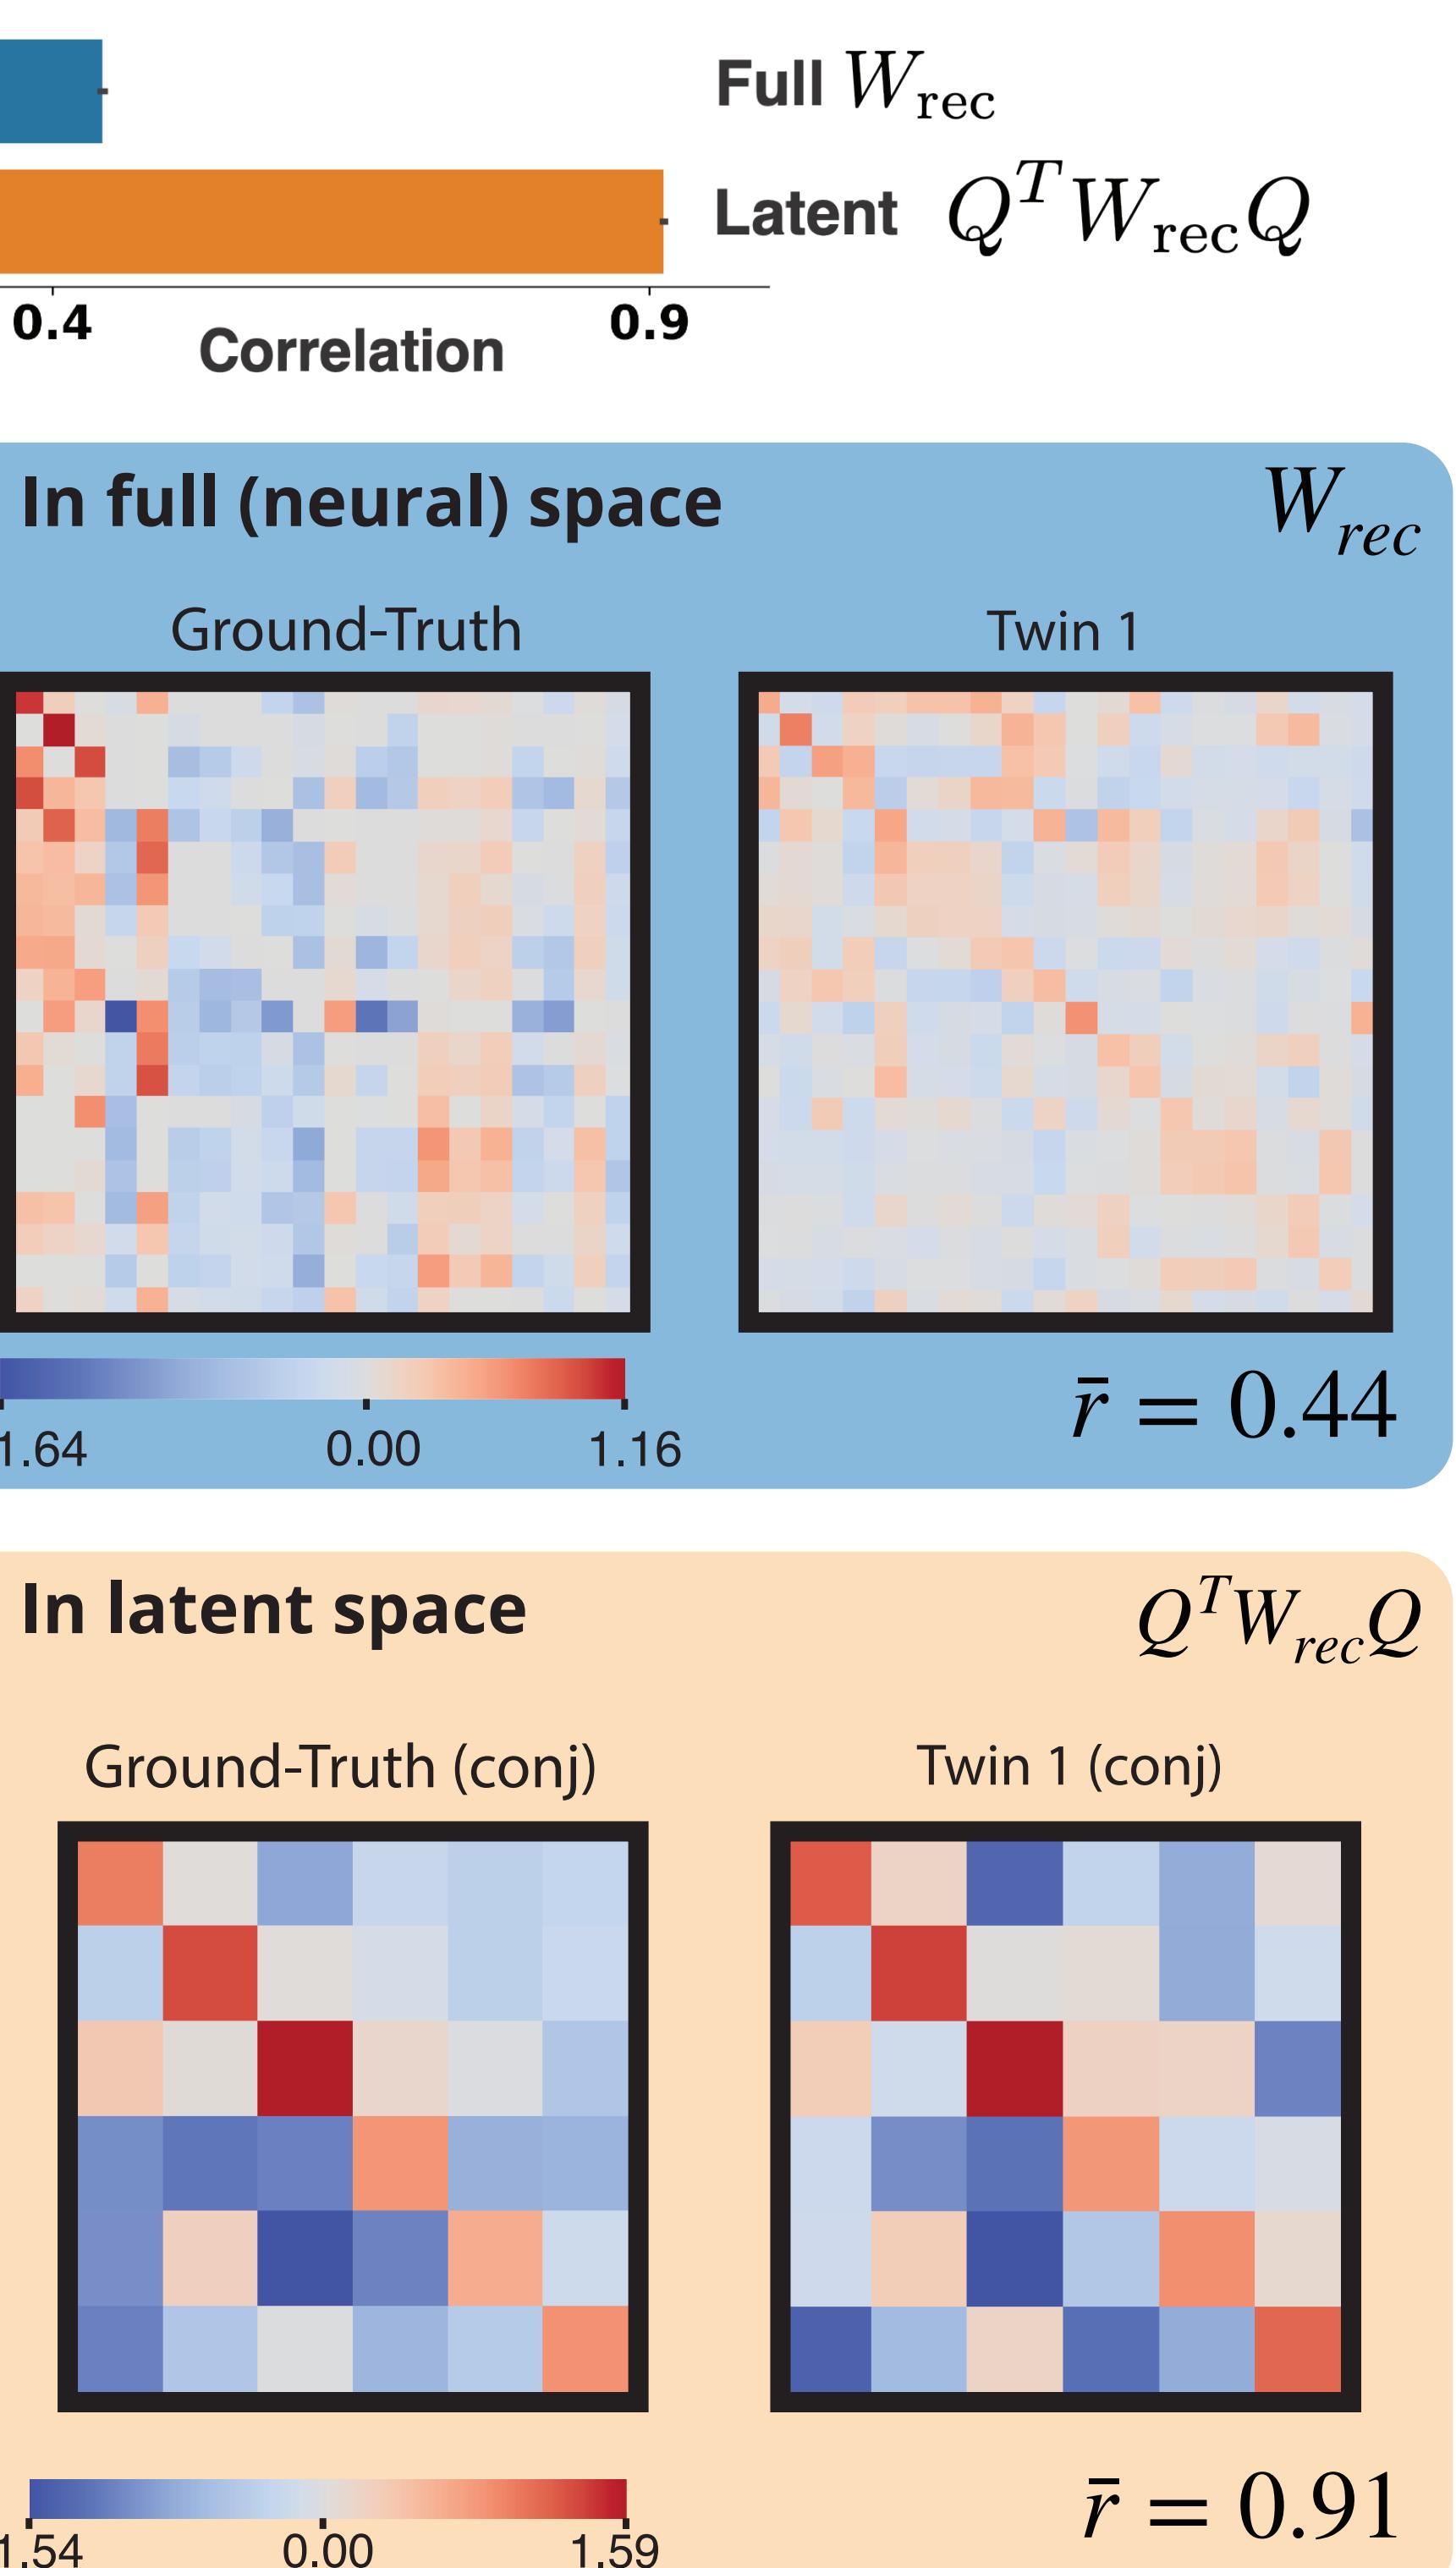

(Top) Twins can predict GT trajectories with high accuracies when perturbations are directed along the latent directions!  
(Left) All twins harbor the same low-D latent structure, despite their discrepancies with the GT in the full space.

## Latent circuit inference

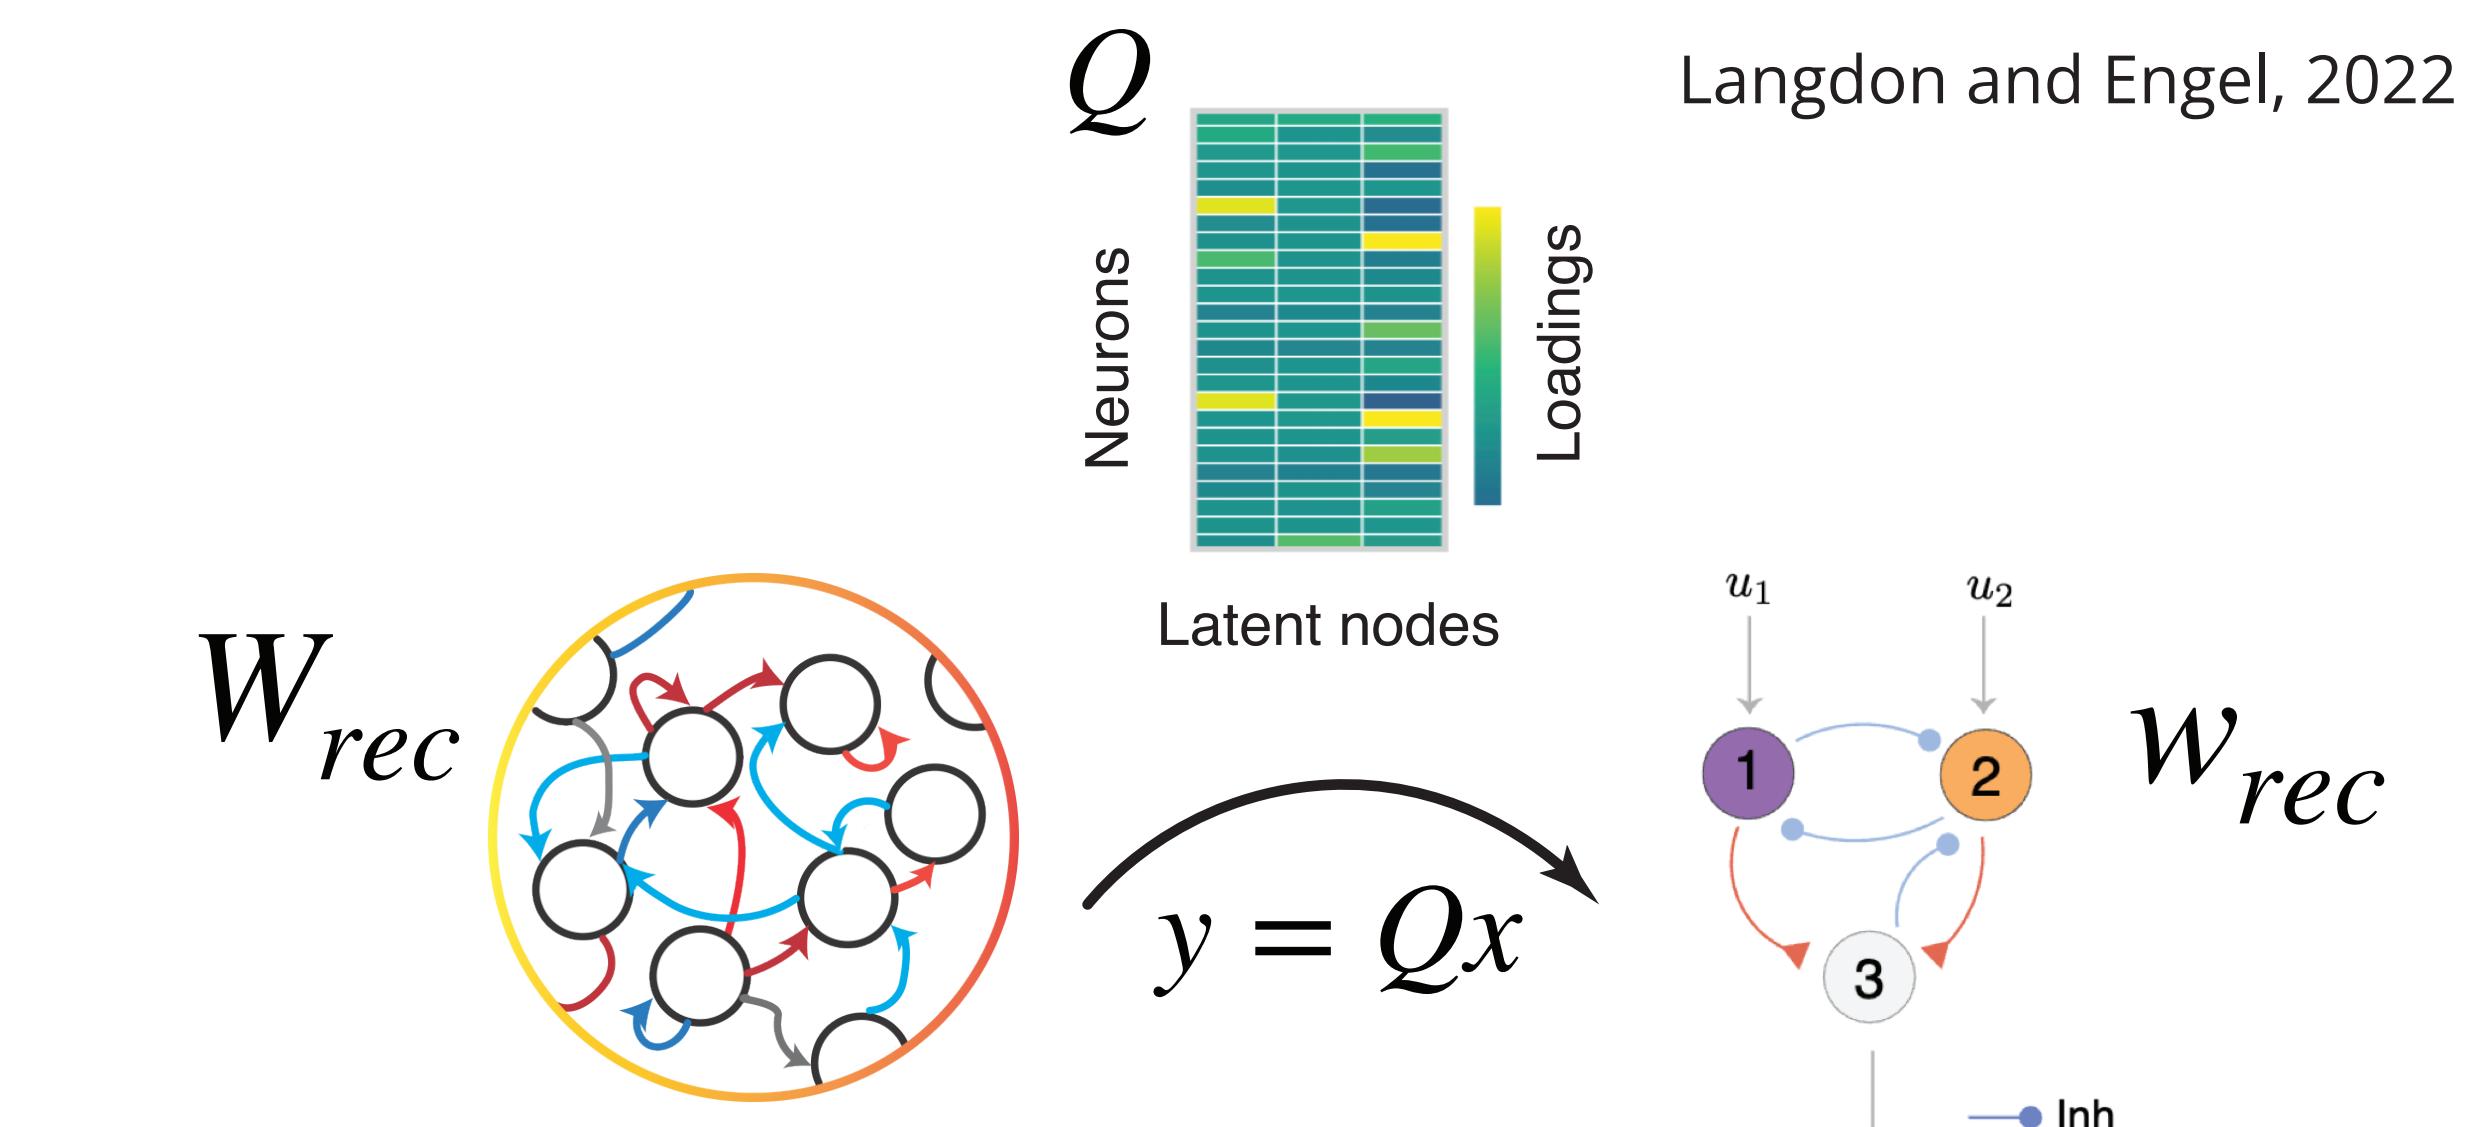

- Latent circuits (100 replicates, size 4-10 nodes): small RNN, trained on the same task as GT and generates neural dynamics  $\alpha$ . An orthonormal embedding matrix  $Q$  is learnt simultaneously  $Q\alpha$  approximates  $y$ .

Under successful inference, low-D connectivity is a latent structure within the full connectivity.

$$Q^T W_{rec} Q \sim W_{rec}$$

## Conclusions

- Low-dimensional data do not uniquely constrain high-dimensional RNNs, which undermines their interpretability and causal predictive power.
- Trained RNNs connectivity harbors unique low-dimensional structure, which offers maximal predictive power for guiding perturbations.

## References

- Dai, K., Svoboda, K., & Druckmann, S. (2021). Targeted photostimulation uncovers circuit motifs supporting short-term memory. *Nature neuroscience*, 24(2), 259-265.
- Finkelstein, A., Fontolan, L., Economo, M. N., Li, N., Romani, S., & Svoboda, K. (2021). Attractor dynamics gate cortical information flow during decision-making. *Nature neuroscience*, 24(6), 843-850.
- Langdon, C., & Engel, T. A. (2022). Latent circuit inference from heterogeneous neural responses during cognitive tasks. *BioRxiv*, 2022-01.