


Enhancing the Causal Predictive Power in Recurrent Network Models of Neural Dynamics

Jiayi Zhang¹, Tatiana A. Engel²

¹ Lewis-Sigler Institute of Integrative Genomics, Princeton University, Princeton, NJ, USA

² Princeton Neuroscience Institute, Princeton University, Princeton, NJ, USA

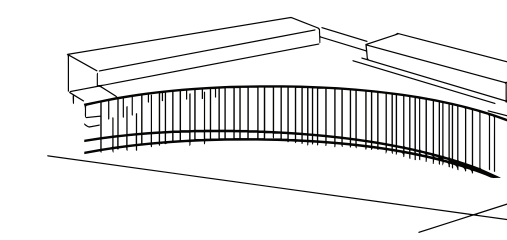


Lewis-Sigler Institute
for Integrative Genomics



Motivations


Model replicates data

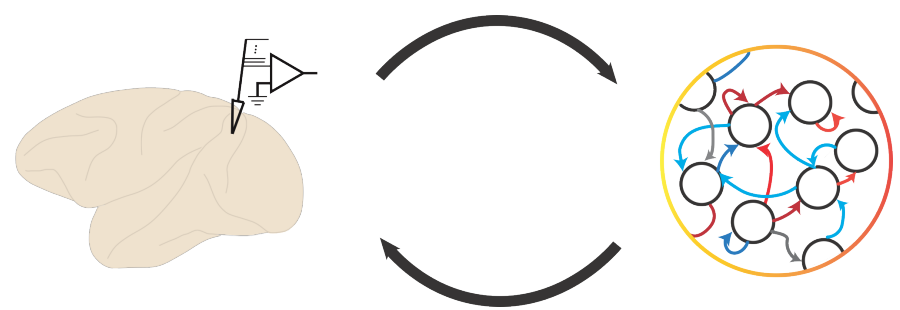

Model guides design of photostimulation

- Optogenetics allows single-cell res. observation and perturbation for behaving neural circuits.
- Need theory to guide perturbations.
- RNNs are fitted to replicate observed dynamics and serve as “twins” to the brain circuits.


Twins are no longer twins

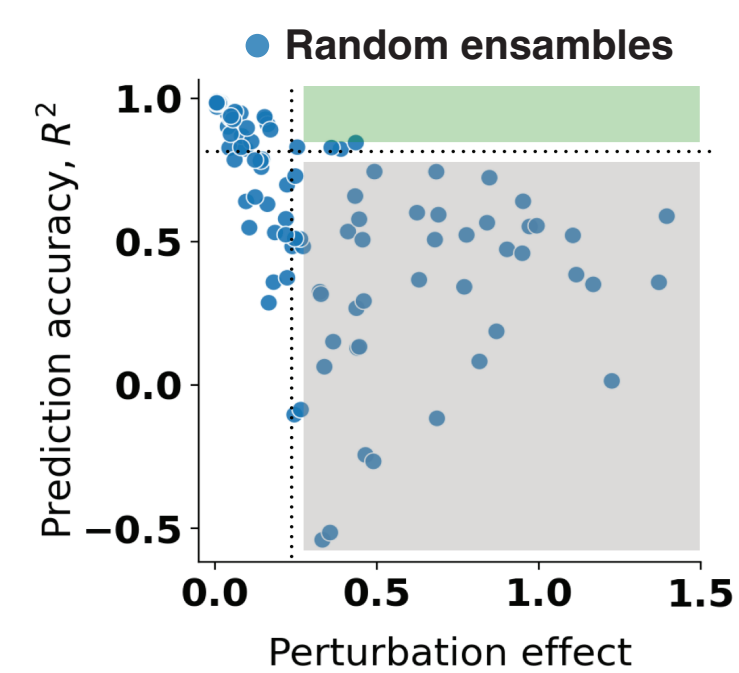

Dream: large effect size; accurate predictions


Reality: large effect size; inaccurate predictions

The curse of dimensionality




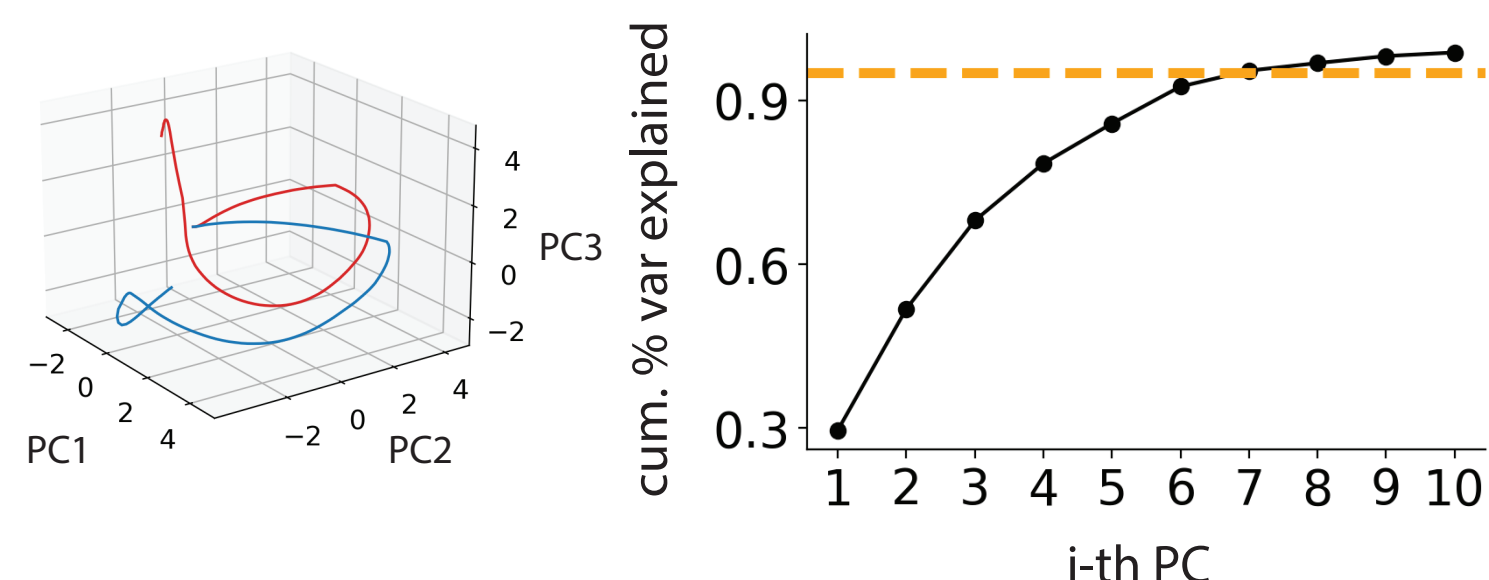


- Dimensionality of data (n) \ll Dimensionality of observed units/neurons (N)
- Low-D data cannot sufficiently constrain the full connectivity of twin models (N^2 parameters).


Fitting models of varying dimensionality

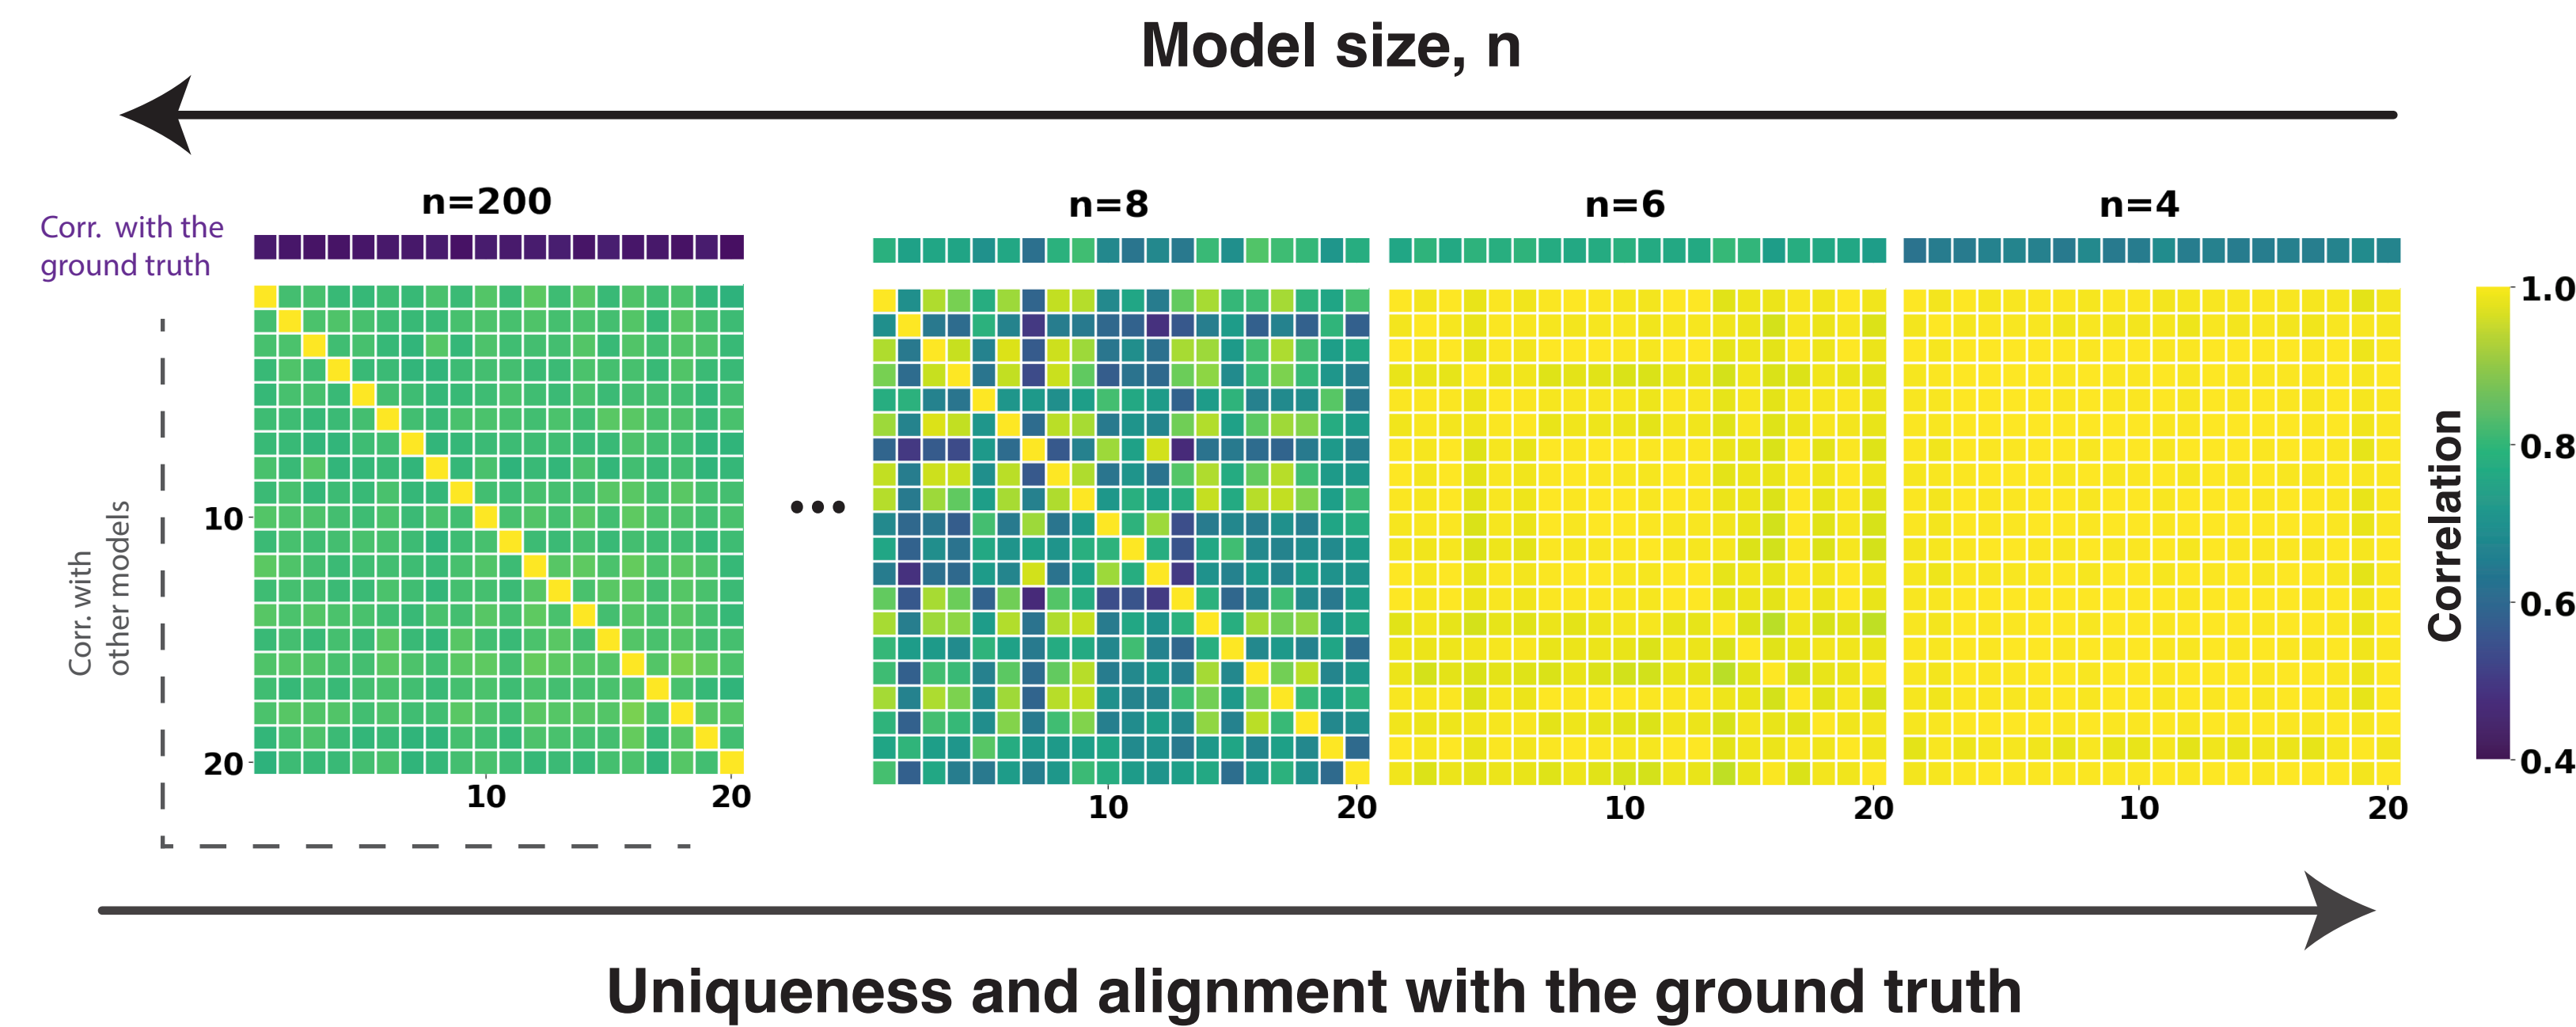

Data uniquely constrain latent low-D connectivity in RNNs

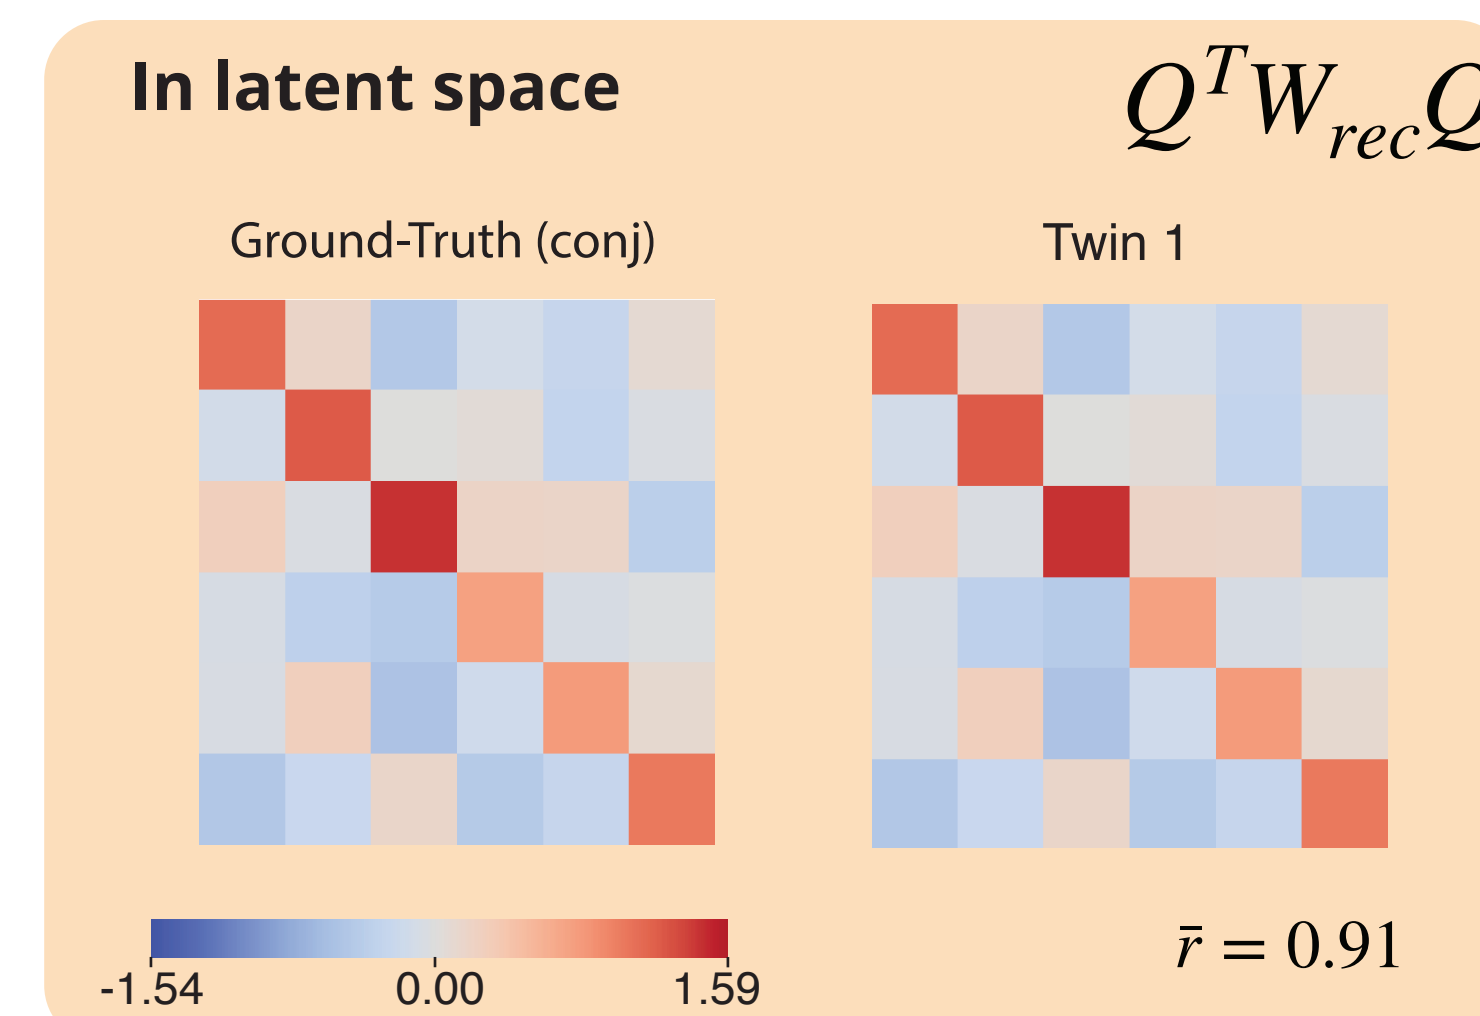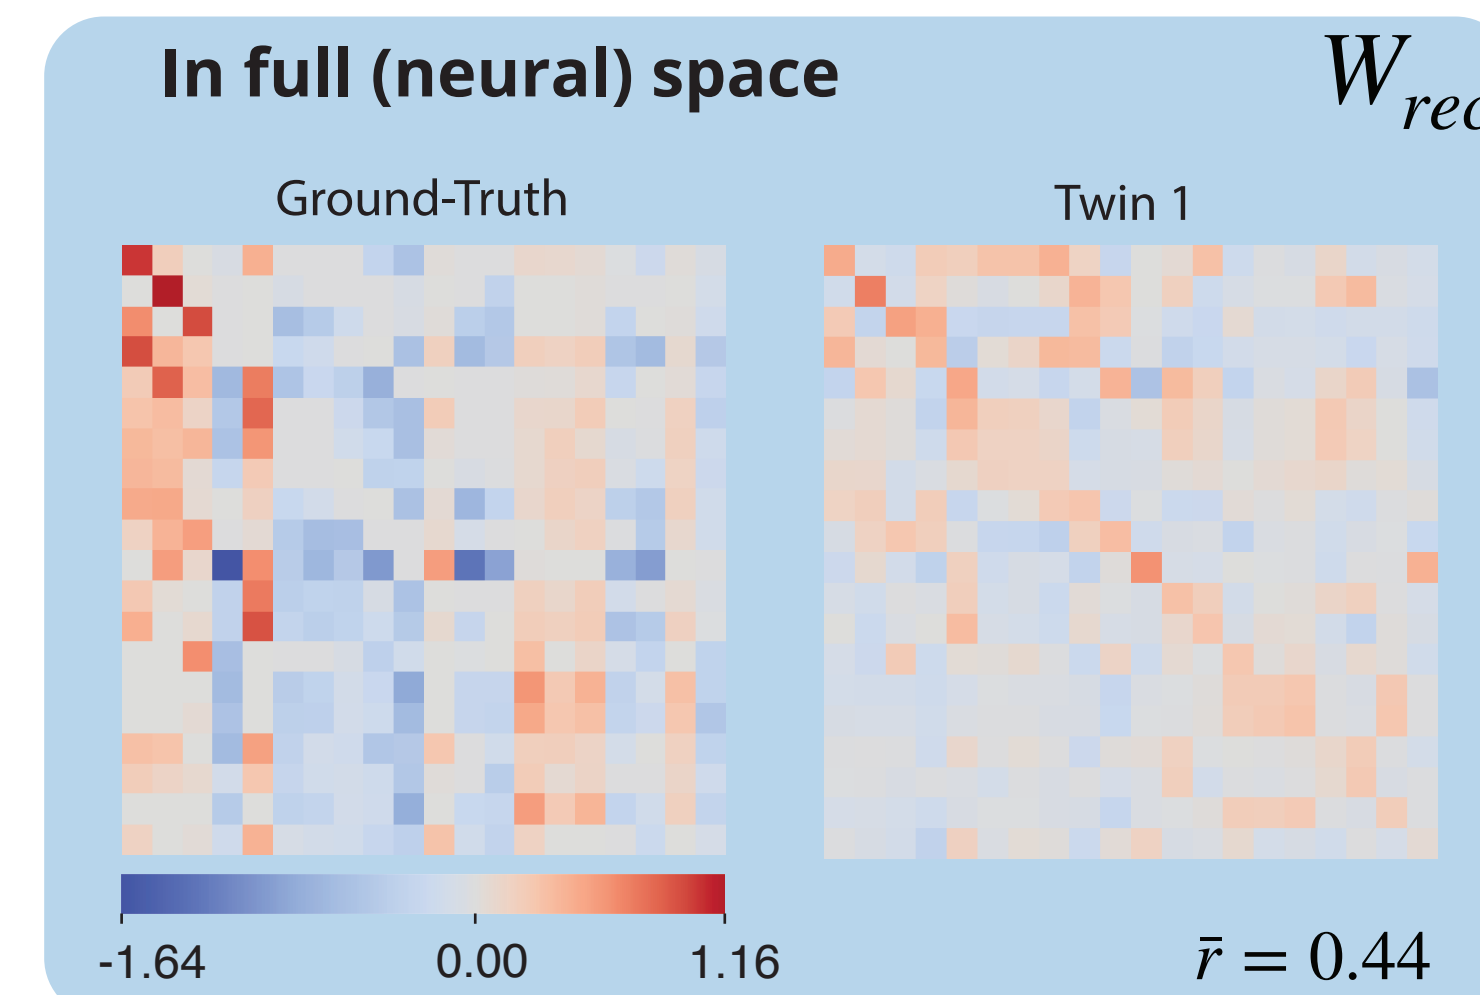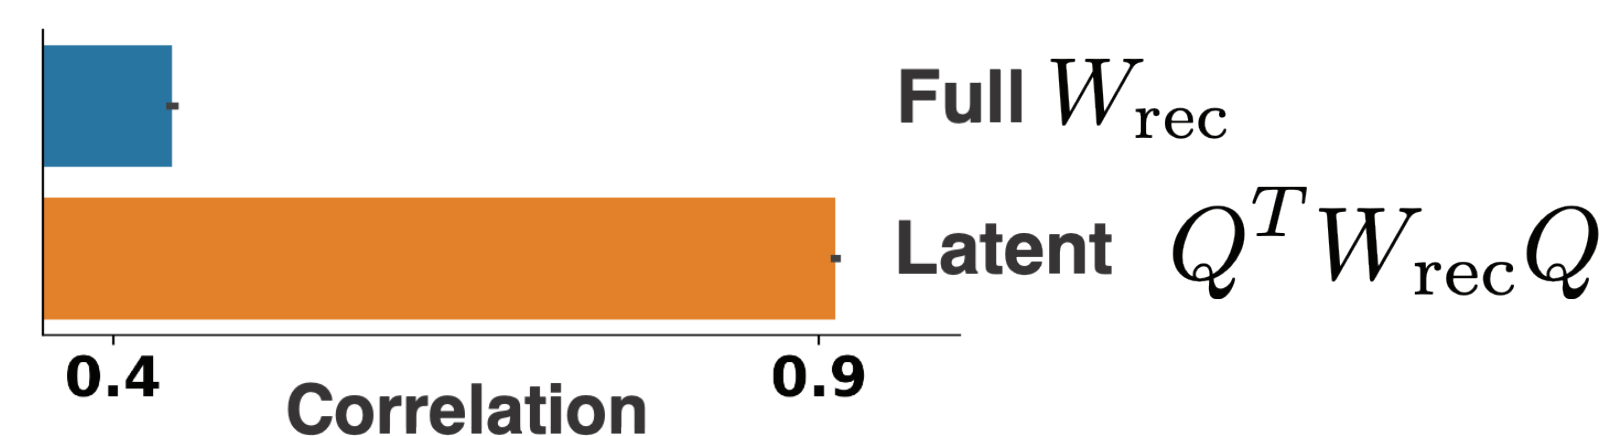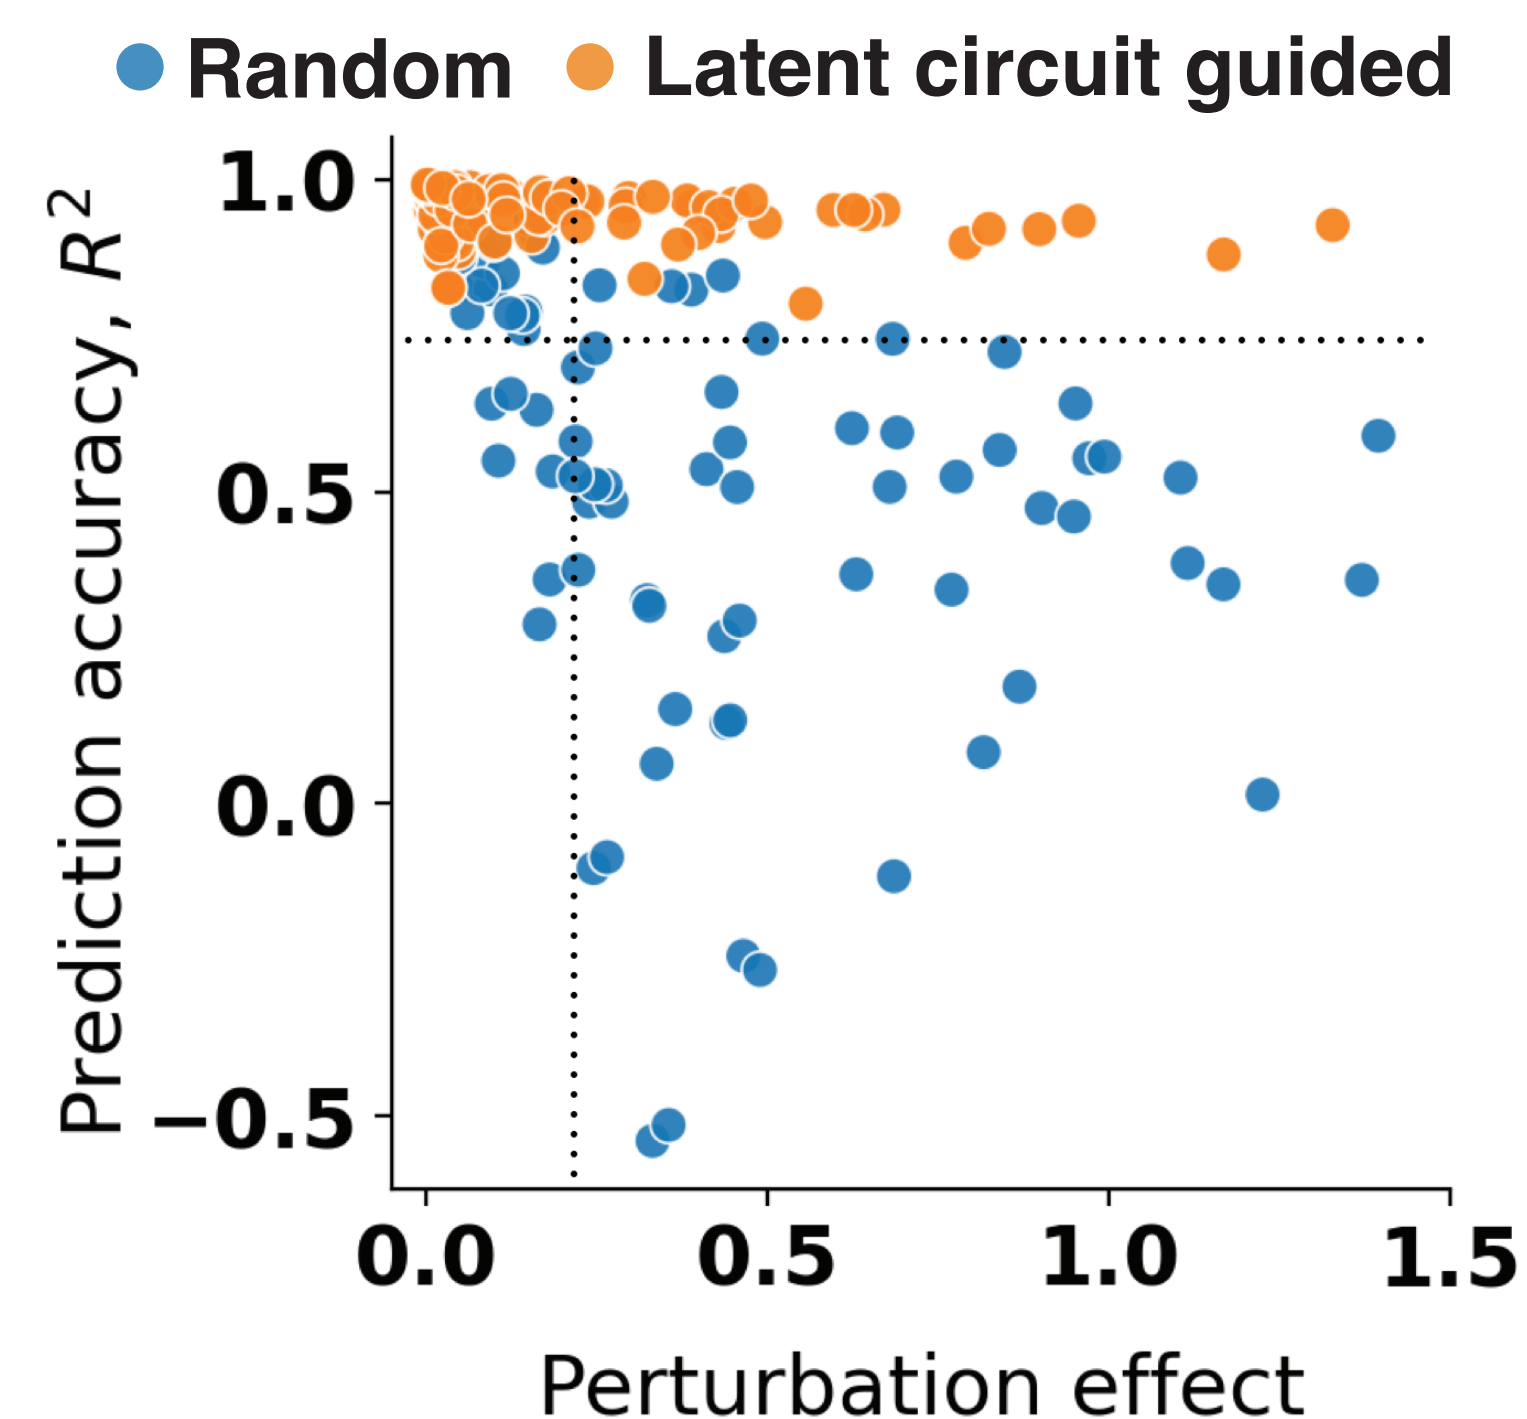

Inferring the latent conn.

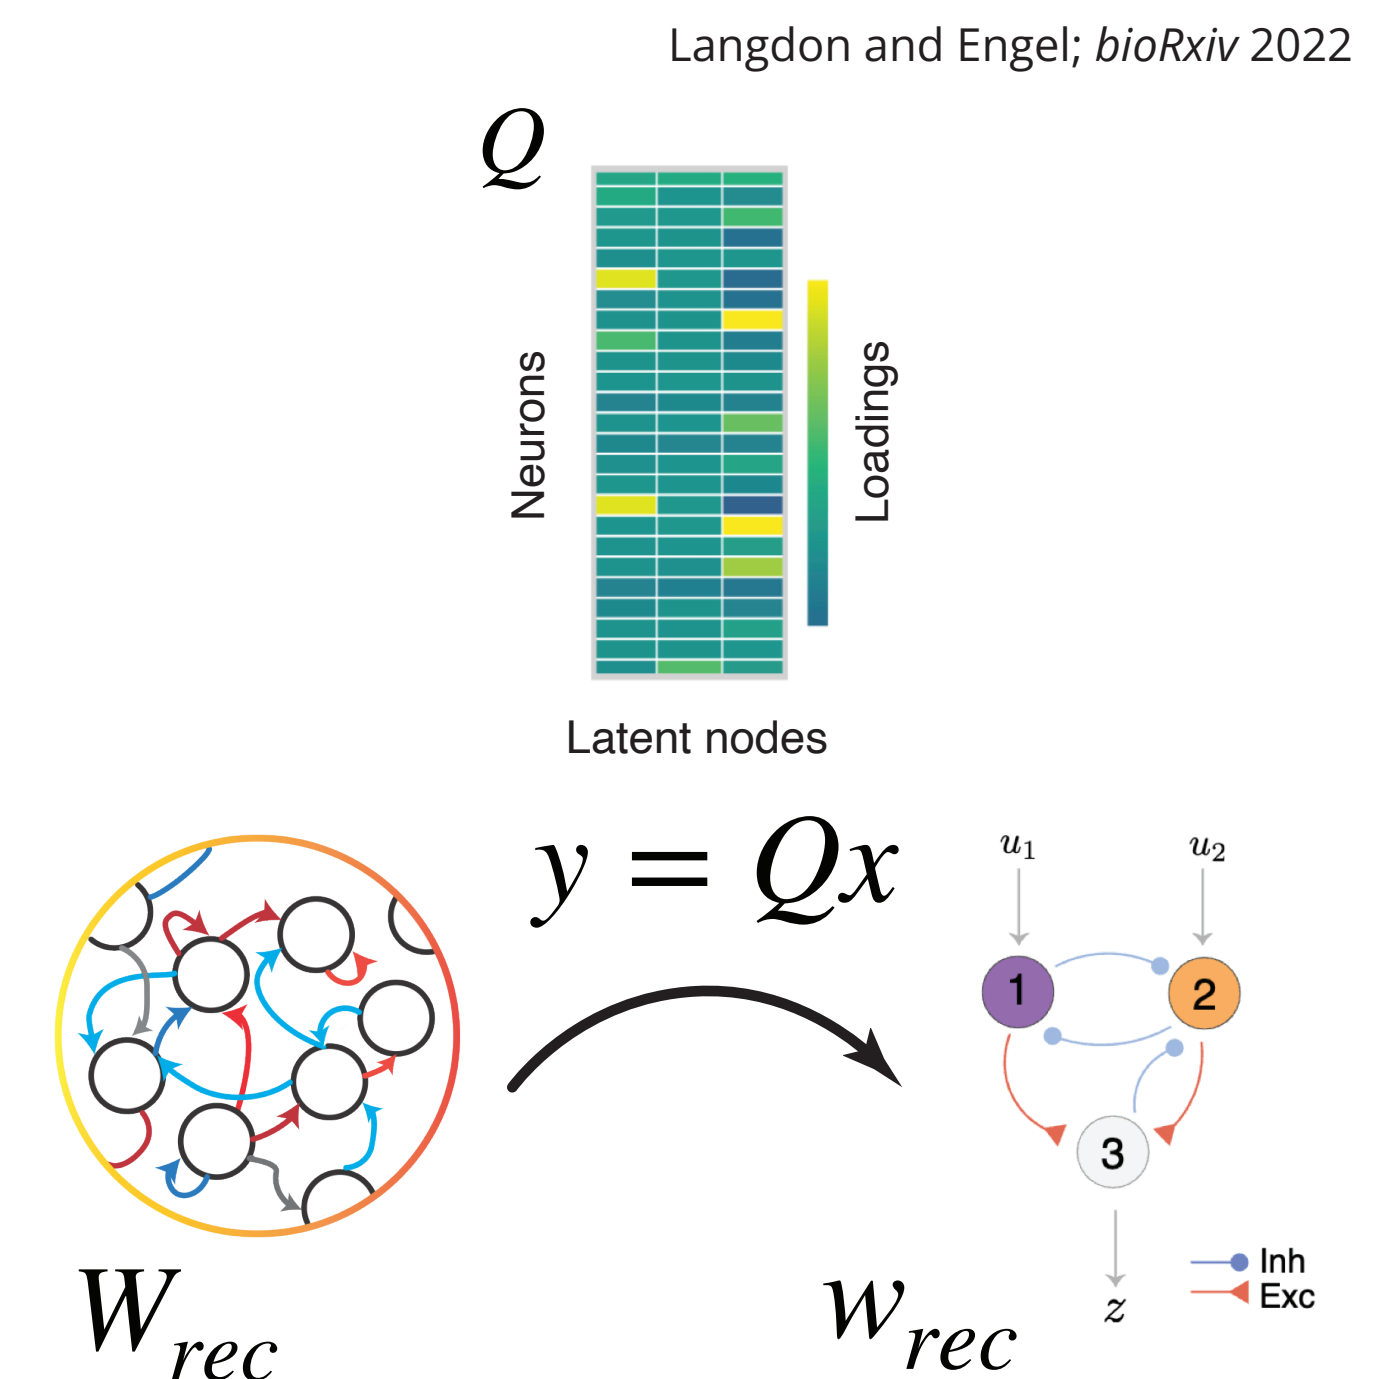

- Theory implies: low-D connectivity is a latent structure within the full connectivity.

$$Q^T W_{rec} Q \sim w_{rec}$$

Conclusions

- Low-D data do not uniquely constrain high-dimensional RNNs, which undermines their interpretability and causal predictive power.
- Trained RNNs connectivity harbors unique low-dimensional structure, which offers maximal predictive power for guiding perturbations.

Reference

Christopher Langdon, Tatiana A. Engel; *Latent circuit inference from heterogeneous neural responses during cognitive tasks*; bioRxiv 2022.01.23.477431; doi: <https://doi.org/10.1101/2022.01.23.477431>