

Enhancing the causal predictive power in recurrent network models of neural dynamics

Summary: Targeted photostimulation optogenetics offers unprecedented precision in perturbing neural circuits in action. However, due to the complexity of neural responses, perturbing neurons chosen randomly or based on their task selectivity often produces weak or counter-intuitive effects. Recurrent neural networks (RNNs) trained to replicate neural activity and task behavior hold promise for guiding the design of targeted perturbations. Yet, it remains uncertain whether low-dimensional neural responses during cognitive tasks sufficiently constrain high-dimensional models to predict outcomes of patterned perturbations reliably.

We investigated this question in task-optimized RNNs, which provide full access to the ground-truth dynamics and connectivity. We trained a 200-unit RNN to perform a delayed decision-making task, which we designated as the ground-truth RNN. We then separately trained an ensemble of 200-unit RNNs, referred to as “twins”, to replicate the neural responses and behavior of the ground-truth RNN, matching the activity of their units one-to-one. Although all twins nearly perfectly reproduced the activity and behavior of the ground-truth RNN under normal task conditions, they had varying connectivity that significantly deviated from the ground truth. As a result, the trajectories of the ground-truth RNN and its twin diverged drastically when we delivered the same patterned perturbations to their units. We found that, despite differences in their full high-dimensional connectivity, all twins and the ground-truth RNN shared the same latent low-rank connectivity driving task-relevant dynamics, which we revealed by fitting RNN responses with low-dimensional latent circuit models. Patterned perturbations aligned with this latent low-rank connectivity produced highly consistent effects between the twins and ground-truth RNN. Our results show that low-dimensional neural responses do not sufficiently constrain high-dimensional connectivity in RNNs fitted to reproduce data, undermining their causal predictive power. Nevertheless, low-dimensional data uniquely constrain latent low-rank connectivity in RNNs, which provides the maximal predictive power for guiding targeted perturbations.

Additional details: We trained a ground-truth RNN with 200 units and a rectified linear (ReLU) activation function to perform a delayed decision-making task modeled after a task designed for mice [1]. On each trial, the network receives either a left or right input and is required to report the input identity by elevating activity in one of two output channels after a fixed delay when given a go-cue. On catch trials, the network receives no inputs and must respond with zero output. After training, the ground-truth RNN had low-dimensional dynamics, with the first 7 principal components (PCs) accounting for over 95% of total variance in its activity (Fig. 1a). We then trained 500 randomly initialized 200-unit ReLU RNNs (“twins”) to replicate both the task behavior and dynamics of the ground-truth RNN, with the activity of each unit in a twin network matching exactly the activity of one unit in the ground-truth RNN [2]. All twins learned the task and achieved a near-perfect reconstruction accuracy of the ground-truth responses ($\bar{R}^2 = 0.98$, Fig. 1b). However, the twins had varying recurrent connectivity, indicated by moderate values of pair-wise correlation coefficients between their recurrent connectivity matrices ($\bar{r} = 0.82$, Fig. 1c). Accordingly, all twins’ connectivity deviated significantly from the ground truth ($\bar{r} = 0.44$, Fig. 1c). We next tested how accurately the twins predicted the effects of patterned perturbations in the ground-truth RNN. On each perturbation trial, we stimulated an ensemble of 15 randomly selected units with a brief excitatory input. We sampled 10 ensembles and applied perturbations at 3 different time points during the delay epoch, mimicking the targeted photostimulation experiment [1]. We applied the same perturbations to the ground-truth RNN and a twin and measured the deviations between their trajectories. The twin failed to reliably predict changes in the ground-truth RNN dynamics during perturbations (Fig. 1d). These results show that low-dimensional task trajectories do not sufficiently constrain high-dimensional connectivity in twin RNNs, which comprises their ability to accurately predict perturbation effects.

We hypothesized that despite discrepancies in the full high-dimensional connectivity, all twins and the ground-truth RNN share the same latent low-dimensional connectivity structure that generates task-related dynamics. To test this hypothesis, we fitted the responses and behavior of the ground-truth RNN with the latent circuit model [3]. Specifically, we model neural response data y as a linear embedding $y = Qx$ of latent variables x with dynamics generated by a low-dimensional RNN: $\dot{x} = -x + f(w_{\text{rec}}x + w_{\text{in}}u)$. Here, Q is an orthonormal embedding matrix, and f is a ReLU activation function. We also require the latent circuit to reproduce task outputs z via

output connectivity: $z = w_{\text{out}}x$. By jointly fitting task behavior and neural response data, the latent circuit model simultaneously identifies a subspace Q that contains task-relevant dynamics and a low-dimensional RNN that generates dynamics within this subspace, which implements task computations. If the latent circuit accurately fits the RNN responses, then the connectivity w_{rec} as a latent low-rank structure within the full connectivity W_{rec} , which can be revealed by conjugating W_{rec} with the embedding matrix Q : $w_{\text{rec}} \approx Q^T W_{\text{rec}} Q$ [3]. Thus, our hypothesis states that all twins and the ground-truth RNN share the same latent low-rank connectivity generating dynamics within the latent circuit subspace Q .

We fitted the responses and task behavior of the ground-truth RNN with latent circuits of varying dimensions ($n = 4-10$), with 100 randomly initialized replicates for each n . The fit improved with increasing n , saturating at $R^2 \approx 0.90$ for $n = 6$. The inferred w_{rec} and Q were highly consistent across replicates for $n \leq 6$ ($\bar{r} = 0.96$ between w_{rec} of replicates for $n = 6$) but diverged at larger n (Fig. 1e). Moreover, the inferred latent connectivity best aligned with the ground truth at $n = 6$ ($\bar{r} = 0.78$). To test our hypothesis, we conjugated the recurrent connectivity matrices of all twins with the same Q from the 6-dimensional latent circuit fitted to the ground-truth RNN, which revealed highly similar low-dimensional connectivity in all networks (average $\bar{r} = 0.91$, Fig. 1h), indicating that all twins and the ground-truth RNN share the same latent connectivity structure (Fig. 1g). Furthermore, patterned perturbations along the columns of Q produced consistent effects between the ground-truth RNN and the twin (Fig. 1d). Our work shows that low-dimensional data uniquely constrain low-dimensional connectivity within RNN models, which offers maximal predictive power for guiding perturbations.

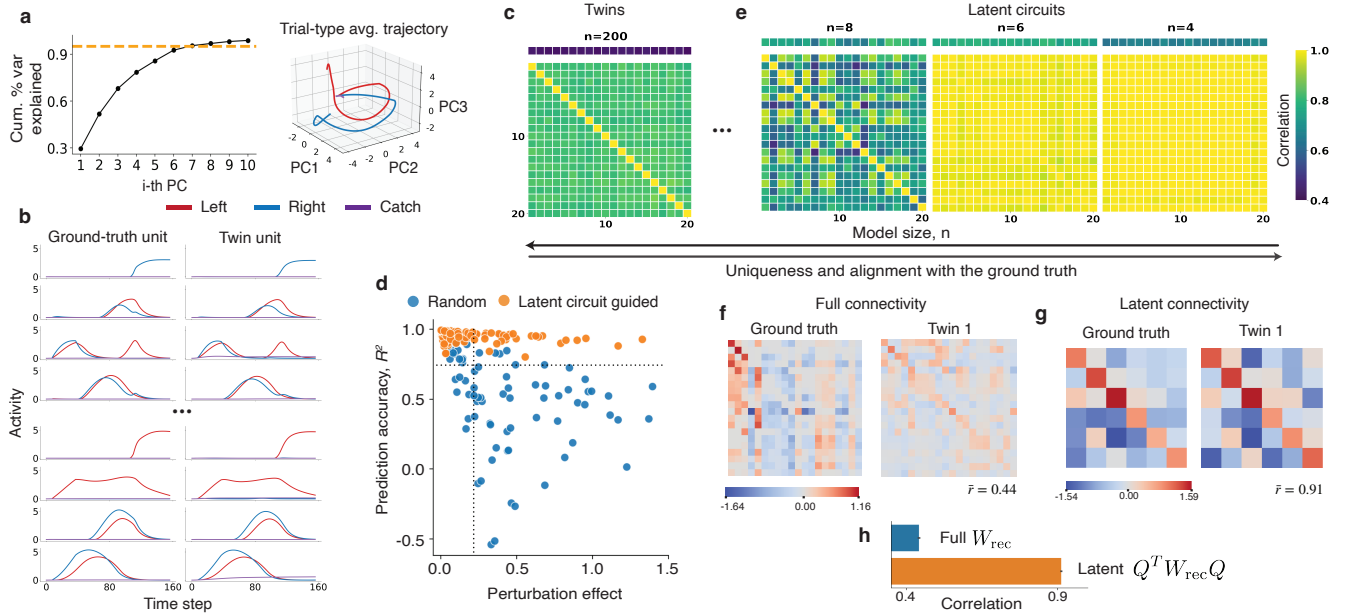


Fig 1: (a) The ground-truth RNN has low-dimensional dynamics during the task, with the first 7 PCs explaining over 95% of variance. (b) Trial-type averaged responses of example units in the ground-truth RNN (left) and one of its twins (right) show the one-to-one correspondence. (c) Correlation coefficients between W_{rec} of 20 best-fitting twin RNNs (square matrix) and between W_{rec} of each twin and the ground-truth RNN (top row). (d) Deviation from the normal task trajectories elicited by perturbations in the ground-truth RNN (x-axis) versus the accuracy of the twin in predicting the ground-truth RNN trajectories during the same perturbations (y-axis). The twin fails to reliably predict random perturbations (blue), but accurately predicts perturbations along columns of Q identified by a 6-dimensional latent circuit (orange). (e) Same as c for latent circuit models of varying dimension n . (f) The full recurrent connectivity W_{rec} vastly disagrees between the ground-truth RNN and its twins, shown for one example twin. (g) The latent low-dimensional connectivity, identified as $Q^T W_{\text{rec}} Q$, is highly similar between the ground-truth RNN and its twins, shown for the same example twin as in f. (h) Correlation coefficients between the latent connectivity $Q^T W_{\text{rec}} Q$ of the ground-truth RNN and all twins are high (orange, $\bar{r} = 0.91$) despite low correlations between their full connectivity W_{rec} (blue, $\bar{r} = 0.44$).

References: [1] Daie, Svoboda, & Druckmann. Nat Neurosci. 24(2):259-265 (2021) [2] Finkelstein et al. Nat Neurosci. 24(6):843-850 (2021) [3] Author et al. bioRxiv (2022)