

Flexible learning through reuse and reconfiguration of stable functional clusters

Summary: Animals acquire and reuse motor skills across diverse contexts throughout their lifetime. Yet, it remains unresolved whether the motor cortex achieves this flexibility by recruiting new circuit modules or reconfiguring existing ones. Although prior work has shown that population-level representations can change or stay preserved across task contexts [1], the circuit mechanisms underlying this reorganization are still unknown.

We analyzed the activity of the same population of neurons recorded using longitudinal two-photon calcium imaging in mice trained on a sensory-guided directional licking task with contingency reversals. Mice first learned one contingency, and upon reaching proficiency, were required to relearn the reversed associations. We fitted neural responses during task performance with latent circuit models [2], with separate models fitted for each task contingency in each animal. The latent circuit model jointly infers a subspace Q containing task-relevant dynamics and the connectivity of a low-dimensional recurrent network—the latent circuit—that generates dynamics within this subspace. The columns of the orthonormal matrix Q map each latent node to a distributed neural activity pattern that correlates with its activity.

Across all animals and contingencies, each neuron typically had a large weight on a single column of Q , with different neurons loading on different columns, indicating the presence of functional clusters with shared response properties. After relearning, the cluster membership of neurons remained largely stable. Most clusters preserved their temporal profiles and selectivity for stimulus or choice, whereas a few clusters changed their response profiles, providing a substrate for implementing the new contingency. In both contingencies, the inferred recurrent weights exhibited enriched feedforward excitation and feedback inhibition, revealing a conserved circuit motif despite reconfigurations. Our results demonstrate that the motor cortex enables flexible relearning through the reuse and modification of stable functional clusters, with a conserved circuit motif reemerging across contingencies despite changing cluster functions.

Additional details: We fitted latent circuits to the neural responses and behavior of four mice in two contexts (839, 1122, 1485, and 2019 neurons for each animal) [1]. Tracking the same neurons across contexts allowed us to test how their functional properties changed after relearning. Mice first learned to associate anterior/posterior whisker contacts with left/right licking. Upon reaching proficiency, the contingency was reversed, requiring the mice to produce the same motor output but in a new sensorimotor context (Fig. 1a).

We modeled neural responses y as a linear embedding $y \approx Qx$ of latent variables x (Fig. 1b) with dynamics governed by a low-dimensional recurrent neural network (RNN): $\tau \dot{x} = -x + \phi(w_{\text{rec}}x + w_{\text{in}}u + \xi)$. The orthonormal matrix $Q \in \mathbb{R}^{N \times n}$ maps each latent RNN node onto a distributed neural activity pattern. $\phi(\cdot)$ is a rectified linear activation function with fitted bias, u is the task inputs, and ξ is a centered white noise. The latent circuits are randomly initialized and trained to minimize the composite loss function with backpropagation-through-time:

$$\mathcal{L}_{\text{total}} = \underbrace{\|y - Qx\|_2}_{\text{trajectory reconstruction}} + \underbrace{\|Dy - DQx\|_2}_{\text{behavior reconstruction}} + \underbrace{\|\text{vec}(W_{\text{rec}})\|_1}_{\text{recurrent weight sparsity}}, \quad (1)$$

The behavior reconstruction loss encourages the model to prioritize fitting neural dynamics most relevant to task performance, where D denotes fixed linear decoders trained separately to predict stimulus and choice from neural responses. L1 penalty on the recurrent connectivity promotes model convergence and interpretability. We fitted circuits of varying sizes, and chose the size that provided the best balance between explained variance and model convergence ($n = 6, 8, 9, 11$ for four mice). The latent circuits captured 60% of the total neural response variance and 91% of behavioral variance, on average. Across animals and contingencies, Q -matrices converged to sparse, non-overlapping columns (Fig. 1c), indicating that each neuron was predominantly assigned to a single latent node. Rows of the inferred Q had a significantly higher Hoyer sparsity index than the null distributions generated by random rotations of Q (Fig. 1d, Context 1 $\bar{H} = 0.43$, null $\bar{H} = 0.27$; Context 2 $\bar{H} = 0.42$, null $\bar{H} = 0.27$), confirming that neurons typically exhibited a single dominant loading and organized into functionally discrete clusters rather than showing random mixed selectivity. Indeed, neurons with high loadings on a given latent node displayed activity profiles that correlated tightly with that of the corresponding latent node (Fig. 1e).

We quantified the correspondence between clustered populations across contexts for each animal. First, we com-

puted the optimal permutation P^* of Q_1 that maximally aligns it with Q_2 :

$$P^* = \underset{P \in \mathcal{P}}{\operatorname{argmax}} \operatorname{Tr}((PQ_1^T)Q_2), \quad (2)$$

where $\mathcal{P}$ is the set of all $n \times n$ permutation matrices. The alignment is required because Q matrices are randomly initialized and may differ by a permutation. After the alignment, matrix $G^* = (P^*Q_1^T)Q_2$ summarizes the correspondence between clusters in Q_1 and Q_2 , with the diagonal entries g^* quantifying the cosine-similarity between matched clusters (Fig. 1f). Across animals, 18 of the 34 clusters (53%) showed high similarity $g^* > 0.5$, indicating substantial reuse of existing clusters rather than random remapping during relearning. We then tested whether the identified clusters preserved or altered their functional properties across contingencies. To this end, we projected neural activity from both contexts onto the subspace Q_1 from the first context (Q_1y_1 and Q_1y_2) and computed trial-averaged projected trajectories for each task condition. To dissociate the selectivity for stimulus and choice, we defined two cross-context correlations between trajectories on trials with the same choice ($\operatorname{Corr}_{\text{choice}}$) and on trials with the same stimulus ($\operatorname{Corr}_{\text{stim}}$). Most clusters showed remarkably stable response profiles, preserving both their temporal dynamics and selectivity for either stimulus or choice across contexts, as indicated by high values of the correlations exceeding 0.9 (Fig. 1g,h). A subset of clusters showed lower correlations under both metrics, showing changes in their temporal profiles and selectivity (Fig. 1g,h), necessary to implement the new contingency. Despite these reconfigurations, the inferred recurrent weight matrices displayed chains with feedforward excitation and feedback inhibition (Fig. 1i) in both contexts, revealing a conserved circuit motif hypothesized in theoretical models [3]. Our findings suggest that the motor cortex supports flexible learning by reusing and reconfiguring predominantly stable functional clusters, organized in a shared circuit motif despite alterations to cluster functions.

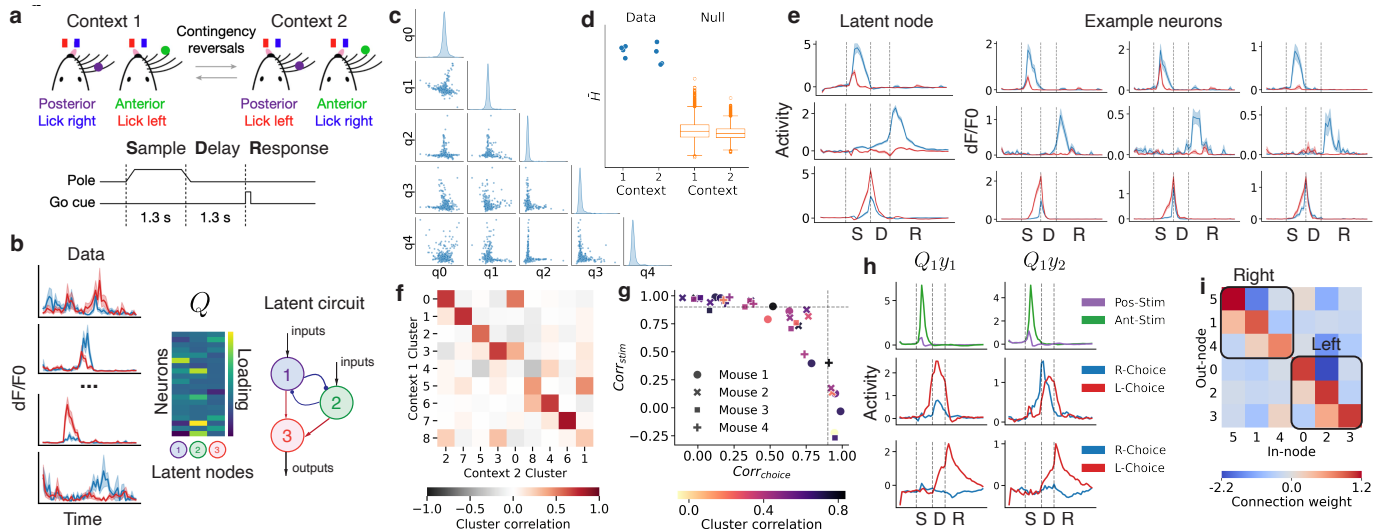


Fig 1: **a**, Task structure and contexts, adapted from [1]. **b**, Latent circuit inference identifies a subspace Q with task-relevant dynamics and a low-dimensional RNN that generates the dynamics within this subspace. Q defines the mapping between the latent nodes and neural activity patterns. **c**, Scatter plots of neuron loadings on pairs of columns q_i of Q show that each neuron is strongly weighted onto a single column, forming axis-aligned clusters. **d**, Q -matrices show significantly higher Hoyer sparsity compared to null (5,000 random rotations of Q , $p < 10^{-10}$), confirming that neurons form non-overlapping clusters. **e**, The activity profiles of neurons in each cluster (right) closely resembled that of the corresponding latent node (left), confirming that latent nodes represent functional neural subpopulations, shown for three example nodes (rows). **f**, Matrix G^* summarizes how clusters identified in Context 1 (rows) align with clusters in Context 2 (columns), shown for an example animal. Diagonal entries quantify how well cluster membership is preserved across contexts for matched cluster pairs. **g**, Across animals, the cluster membership of neurons remained largely stable across contingencies (color-coded). Most clusters maintained their temporal dynamics and selectivity for either stimulus (high on y -axis) or choice (high x -axis). Dashed lines mark 0.9. Some clusters changed their selectivity and dynamics, while still maintaining stable membership (to the left and below 0.9 lines). **h**, Examples clusters that retained their temporal profile and selectivity (top: stable stimulus encoding, bottom: stable choice encoding). Example cluster that changed dynamics and selectivity after relearning (middle). **i**, Inferred latent recurrent connectivity w_{rec} revealed feedforward excitation (below the diagonal) and feedback inhibition (above the diagonal), forming two chains selective for the left and right choice, shown for an example animal.

References: [1] Author et al., 2025. Nature. [2] Author et al., 2025. Nat Neurosci. [3] Daie et al., 2023. BioRxiv, pp.2023-08.