

Practical Concurrent and Parallel Programming III

IT University of Copenhagen

Friday 2020-09-11

Kasper Østerbye

Starts at 8:00

Plan for today

Design of synchronized datastructures

Building blocks

Synchronizers

An example

Hand-out of material

- Readings will be available at latest Thursday morning.
- Exercises will be available Thursday morning.
- Slides will be available Friday morning (yes, I edit them Thursday evening)
 - And regret I cannot update the exercises 😊.

Hand-out of material

- Readings will be available at latest Thursday morning.
- Exercises will be available Thursday morning.
- Slides will be available Friday morning (yes, I edit them Thursday evening)
 - And regret I cannot update the exercises 😊.

Keep those questions coming in the forum!

Selected issues

Best practice for publishing objects.

- Avoid this-escape. If the newly created object need to go into a data structure (even a global variable), use a private constructor and a *factory method*.
- Publish through a thread-safe datastructure or a final/volatile static member.
- Thread localization - sometimes it is possible to ensure only one thread generates objects of a specific type. For example a thread that produce objects for other to process.

Selected issues

Best practice for publishing objects.

- Avoid this-escape. If the newly created object need to go into a data structure (even a global variable), use a private constructor and a *factory method*.
- Publish through a thread-safe datastructure or a final/volatile static member.
- Thread localization - sometimes it is possible to ensure only one thread generates objects of a specific type. For example a thread that produce objects for other to process.

Static holding state shared between all instances of a class

I saw many different solutions to the Person with unique ID.

Person with ID 1

```
class Person {  
    private static long ID = 0;  
    private final long id;  
    // other fields  
    Person (String name,...){  
        id = ID++; // NOT THREAD SAFE  
        // other initialization  
    }  
    // ...  
}
```

Person with ID 2

```
class Person {  
    private static long ID = 0;  
    private final long id;  
    // other fields  
    Person (String name,...){  
        synchronized(Person.class){  
            id = ID++; // Thread safe  
        }  
        // other initialization  
    }  
    // ...  
}
```


Person with ID 3

```
class Person {  
    private static AtomicLong ID = new AtomicLong(0);  
    private final long id;  
    // other fields  
    Person (String name,...){  
        id = ID.getAndIncrement();  
        // other initialization  
    }  
    // ...  
}
```

Person with ID 4

Some software engineers think static variables is bad-taste, and is just confusing. Instead, use two classes:

```
class Person {}  
@Singleton class PersonManager{  
    public static final instance = new PersonManager();  
}
```

```
class Person {  
    Person (String name,...){  
        id = PersonManager.instance.getNextID();  
        // other initialization  
    }  
}
```

Designing synchronized data structures

Beware that the static and non-static part are two objects, not one. Hence they each need their own synchronization.

Designing synchronized data structures

Beware that the static and non-static part are two objects, not one. Hence they each need their own synchronization.

The role of the representation invariant

A representation invariant is a logical statement of the relationship between the fields of an object.

The invariant must be true after the constructor has finished, and after each (public) method call.

Designing synchronized data structures

Beware that the static and non-static part are two objects, not one. Hence they each need their own synchronization.

The role of the representation invariant

A *representation invariant* is a logical statement of the relationship between the fields of an object.

The invariant must be true after the constructor has finished, and after each (public) method call.

The synchronization of methods or blocks of statements is to ensure *consistent and correct* update of the representation in such a manner that the invariant still holds.

Synchronization takes time

- Obtaining the locks
- Loss of parallelism
- Ensuring visibility of changes

Synchronization takes time

- Obtaining the locks
- Loss of parallelism
- Ensuring visibility of changes

Take care not to double-synchronize

- If your class is synchronized, take care not to use a synchronized data-structure internally

Synchronization takes time

- Obtaining the locks
- Loss of parallelism
- Ensuring visibility of changes

Take care not to double-synchronize

- If your class is synchronized, take care not to use a synchronized data-structure internally

Wrapper synchronization

- Provide a non-synchronized and a synchronized version of your class (good use of interfaces).
- This will allow clients of your class to take responsibility of synchronization if needed, or use yours.
- There is an exercise to put some advanced synchronization on top of an existing java (non-thread-safe) collection.

Instance confinement

If you can program your code in such a manner that only one thread knows about it, no need to synchronize!

Java do not offer any mechanisms to guarantee this.

Transfer of ownership


If you can program your code in such a manner that only one thread *at a time* has "ownership" of the object, no need to synchronize.

Question: Will it be safe to allow other threads to have read but not modify access?

Extending an existing class


Extending an existing class

Extension by delegation

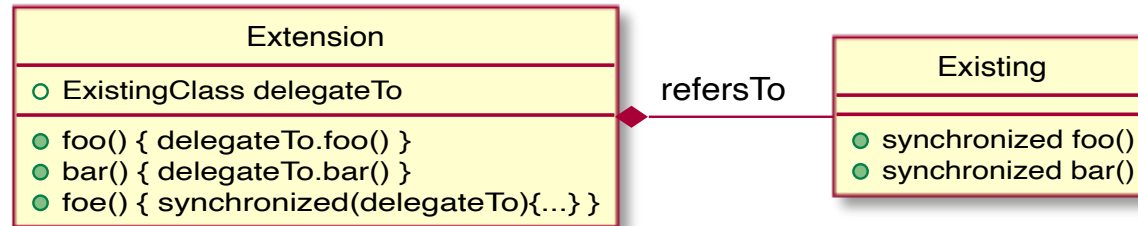


Extending an existing class

Extension by delegation

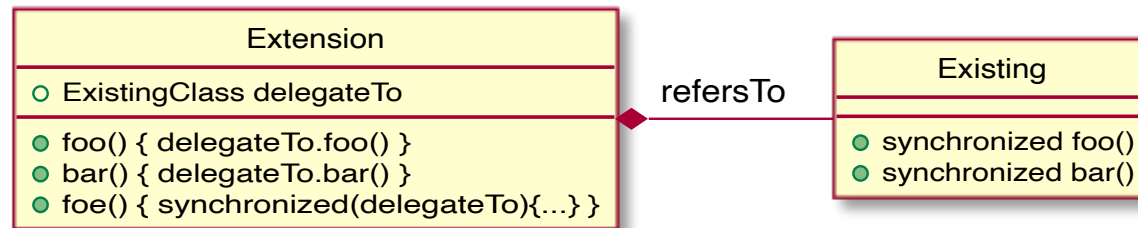


Extension by inheritance

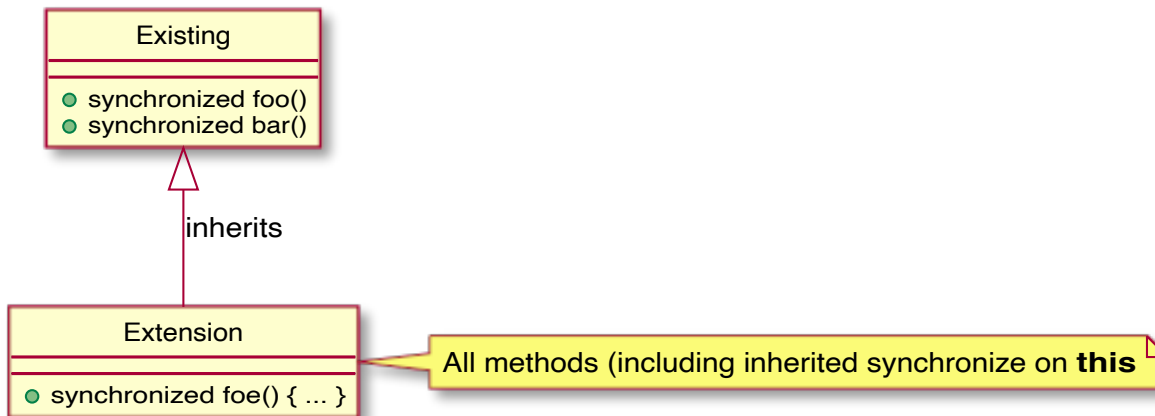


Extension of class with explicit lock

Extension of class with explicit lock

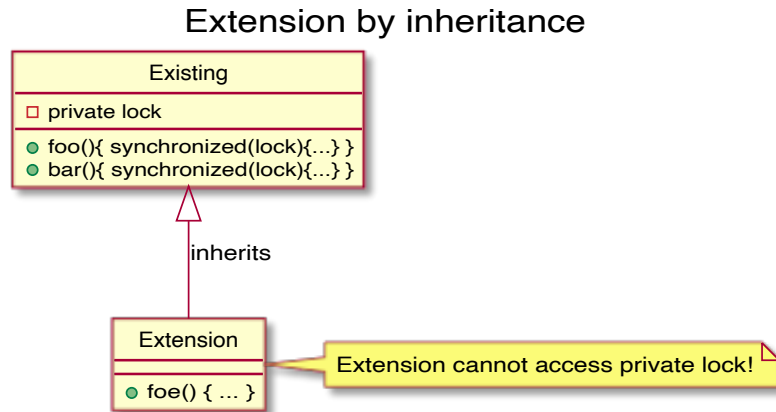


Extension of class with explicit lock

Extension by inheritance

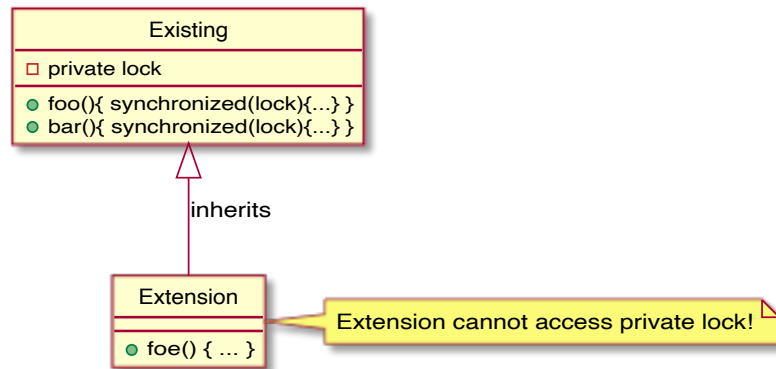

Extension by inheritance

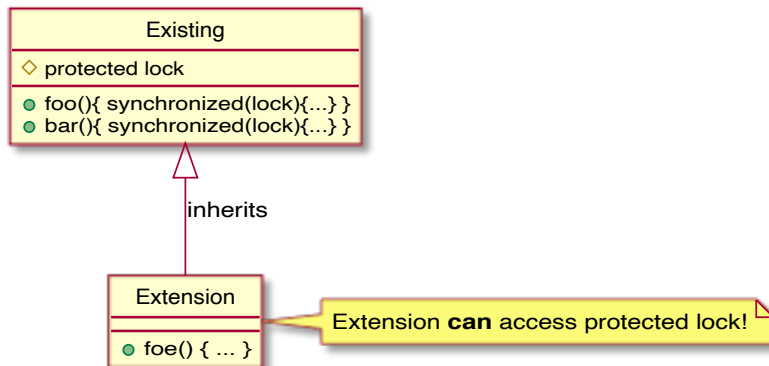

Synchronization on static methods

Synchronizing on a static method foo in class A locks on A.class.

```
class A {  
    public static synchronized void foo(){ }  
}
```

Notice: If class B inherits from A, static synchronized methods in B will lock on B.class, which is a different object from A.class.

```
class B extends A {  
    public static synchronized void bar(){ }  
}
```

Synchronization on static methods

Synchronizing on a static method `foo` in class `A` locks on `A.class`.

```
class A {  
    public static synchronized void foo(){ }  
}
```

Notice: If class `B` inherits from `A`, static synchronized methods in `B` will lock on `B.class`, which is a different object from `A.class`.

```
class B extends A {  
    public static synchronized void bar(){ }  
}
```

Java puzzle: Consider this class:

```
class A {  
    public void foo(){ synchronized( A.class ){...} }  
    public void bar(){ synchronized( this.getClass() ) {...} }  
}
```

Do the two methods `foo()` and `bar()` lock the same object?

Building blocks

Concurrent collections

- Normal collections are in the `java.util` library. In 90% of the cases one use `List` or `Map`.
- The concurrent collections are in `java.util.concurrent`. There are many, and they are mostly specialized.

In particular:

- `java.util.concurrent.ConcurrentHashMap`
- But **no** `java.util.concurrent.ConcurrentArrayList`
- However, `Collections.synchronizedList(new ArrayList())` wraps an `ArrayList`

No concurrent ArrayList

Consider these three operations on List:

- `set(index, elem)`
- `get(index)`
- `add(elem)`

The set/get can be solved by substituting `ArrayList<E>` with `ArrayList<AtomicReference<E> >`.

No concurrent ArrayList

Consider these three operations on List:

- `set(index, elem)`
- `get(index)`
- `add(elem)`

The set/get can be solved by substituting `ArrayList<E>` with `ArrayList<AtomicReference<E> >`.

However, the add operation might occasionally need to copy the whole underlying array. To make this robust add needs to:

- close the list for updates and reads, waits for all currently ongoing operations to finish, and then updates.

?? There is a good Q/A on this on stackoverflow:

<https://stackoverflow.com/questions/6916385/is-there-a-concurrent-list-in-javas-jdk>

Concurrent iterators

A general decision one must make with iterators of collections is their semantics:

- Snapshot - they give the elements in the collection when the iterator was generated
- Unstable - the elements returned by the iterator are only guaranteed if the underlying collection is not changed while iterating.

Notice - both are useful. In particular the unstable can be done very efficient. If you can guarantee its premise, this is the one to go for.

Concurrent iterators

A general decision one must make with iterators of collections is their semantics:

- Snapshot - they give the elements in the collection when the iterator was generated
- Unstable - the elements returned by the iterator are only guaranteed if the underlying collection is not changed while iterating.

Notice - both are useful. In particular the unstable can be done very efficient. If you can guarantee its premise, this is the one to go for.


There is a `java.util.concurrent.CopyOnWriteArrayList<E>` which has snapshot semantics. It is highly inefficient with lots of modifications, but cool for lots of readings.

Break until 9:00

Pause Questions

- Intrinsic locking
- Iterators and replication

The producer-consumer pattern

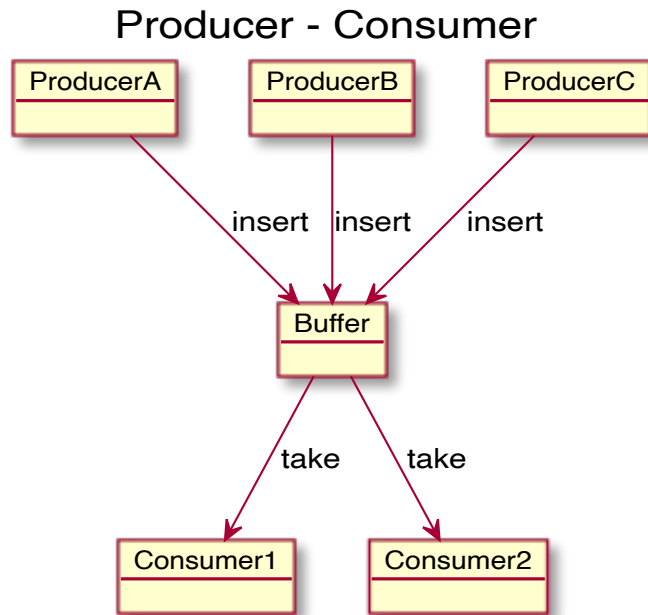


The idea is that a number of Producer threads generate items which the Consumer threads then take and do something with them.

Typically, the buffer is given a fixed size.

If the buffer is full, trying to insert will block the inserting Producer.

If the buffer is empty, trying to take will block the taking Consumer

Blocking

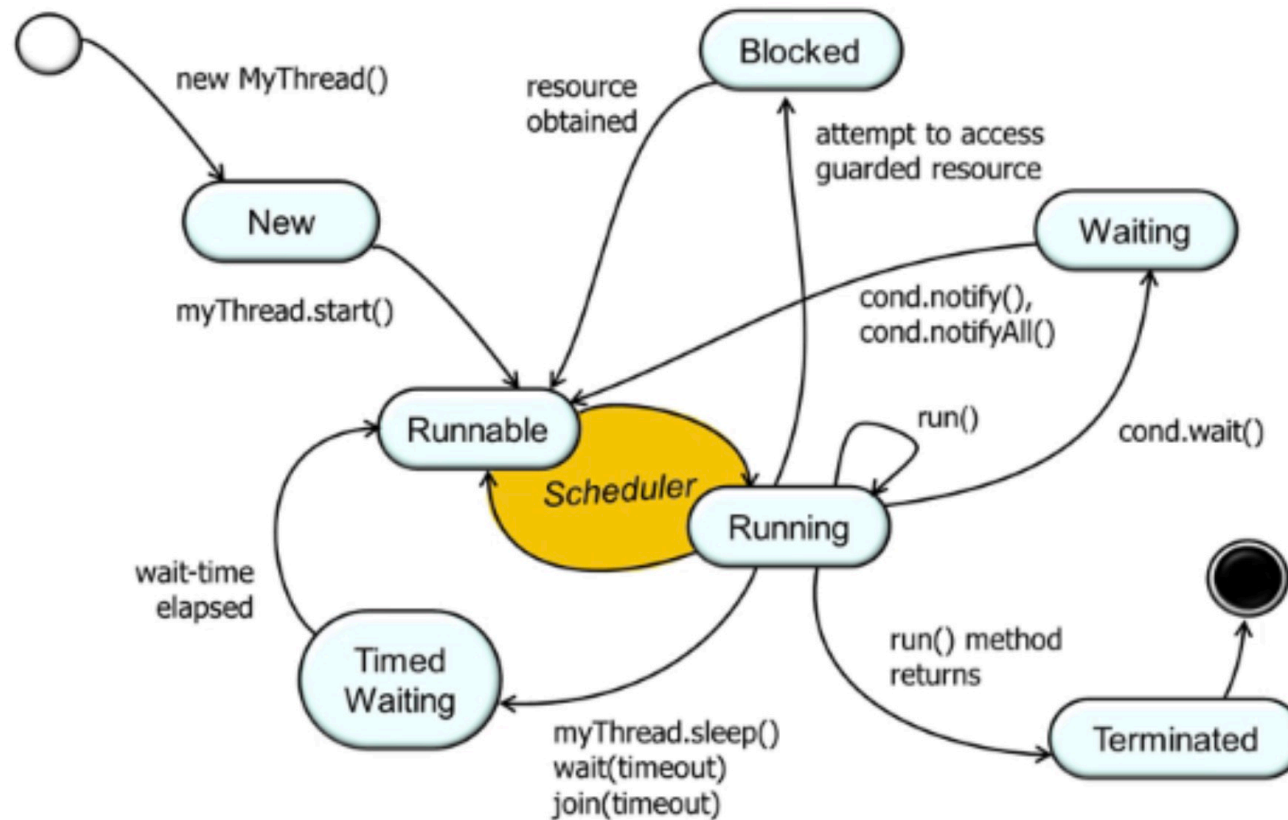

Think of the states "Blocked" and "Waiting" as the same.

The thread is in a state where it cannot *-by itself-* get back to "Runnable"

Interrupting a thread

```
otherThread.interrupt()
```

If this thread is blocked in an invocation of the

- wait(), wait(long), or wait(long, int) methods of the Object class, or of the
- join(), join(long), join(long, int), sleep(long), or sleep(long, int), methods of Thread,

then it will receive an InterruptedException.

```
try{  
    Thread.sleep(2000);  
} catch (InterruptedException knock) {  
    ...  
}  
}
```

Notice: If otherThread is not currently blocked, all that will happen is that a flag is set, and otherThread can then examine if it was interrupted - and maybe do something special in that occasion.

Interrupt

Should not be used for synchronization, use one of the library classes intended for this

Synchronizers

The `java.util.concurrent` has several kinds of objects which implements ways to synchronize threads for different scenarios.

Semaphore


A semaphore is used for guarding a resource (or a number of resources)



When the train arrives at the semaphore, the train driver looks at the semaphore. If it is closed, they wait. If it is open, the train driver jumps out, lowers the semaphore (which is connected by a cable to a semaphore on the other end of the line), drives through, and raises the semaphore at the other end.

Semaphore II

Semaphore with two resources

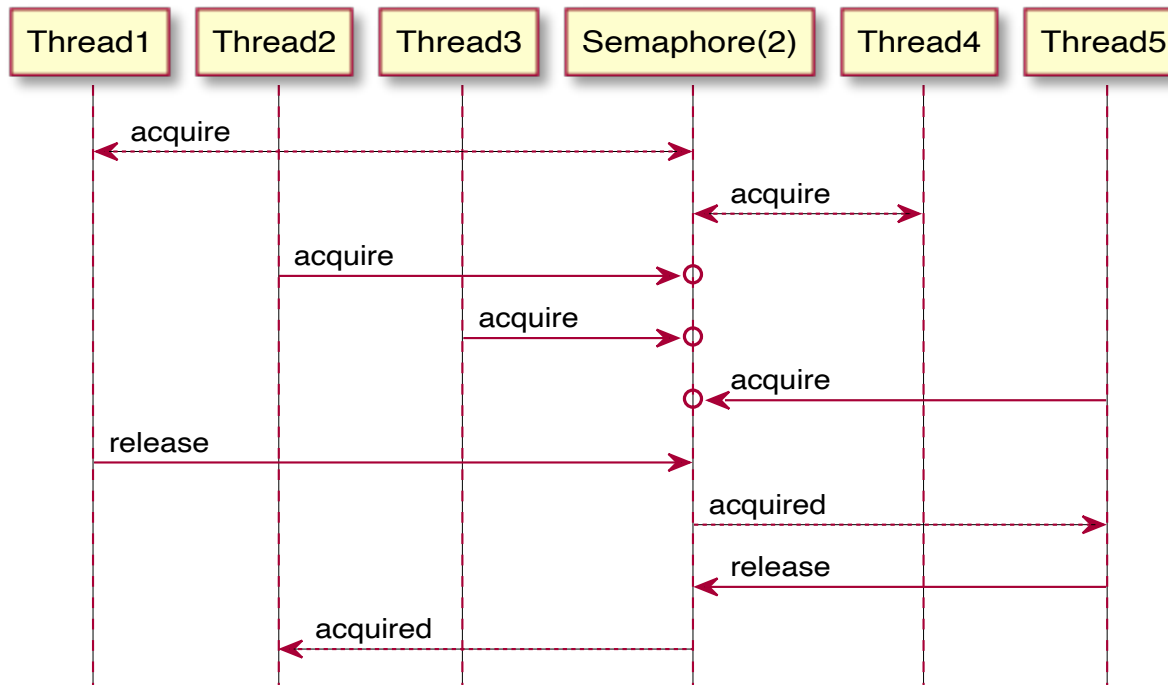


Latch (CountDownLatch)

```
class Driver { // ...
    void main() throws InterruptedException {
        CountDownLatch startSignal = new CountDownLatch(1),
        doneSignal = new CountDownLatch(N);
        for (int i = 0; i < N; ++i) // create and start threads
            new Thread(new Worker(startSignal, doneSignal)).start();

        doSomethingElse();           // don't let run yet
        startSignal.countDown();      // let all threads proceed
        doSomethingElse();
        doneSignal.await();           // wait for all to finish
    }
}

class Worker implements Runnable {
    private final CountDownLatch startSignal, doneSignal;
    Worker(CountDownLatch startSignal, CountDownLatch doneSignal) {
        this.startSignal = startSignal; this.doneSignal = doneSignal;
    }
    public void run() {
        try {
            startSignal.await();
            doWork();
            doneSignal.countDown();
        } catch (InterruptedException ex) {} // return;
    }
    void doWork() { ... }
}
```

Latch (trapdoor?)

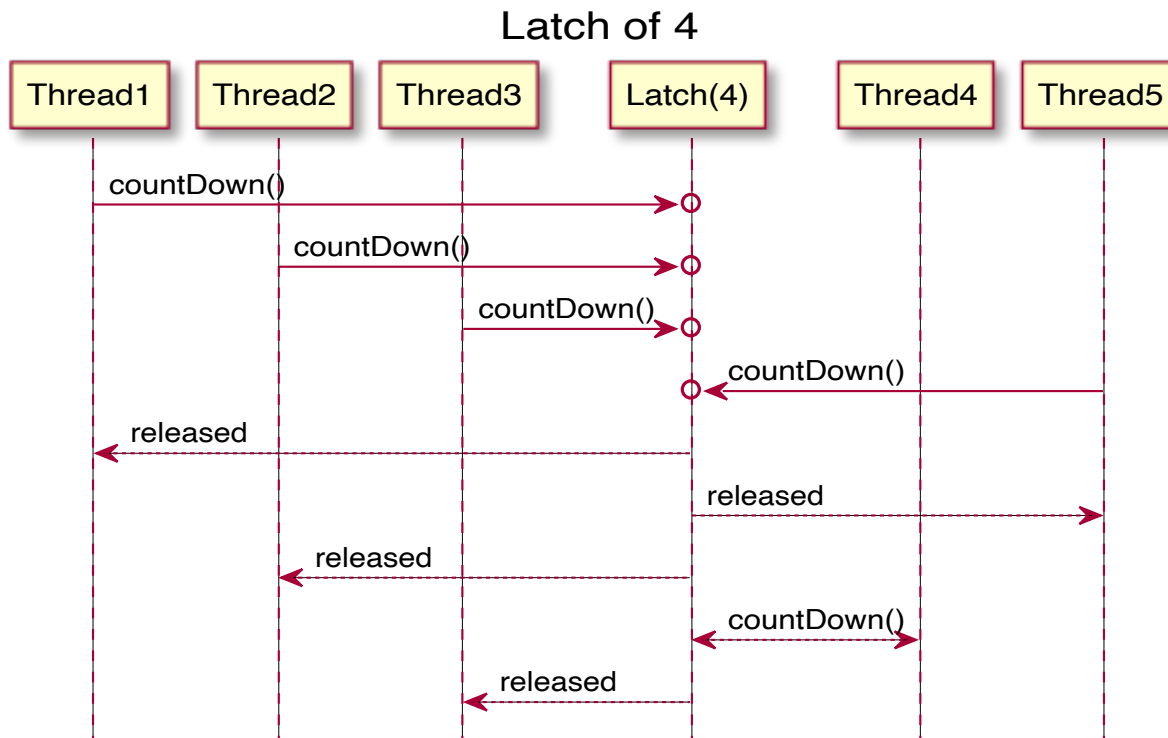

I think trapdoor because once all are present you fall through all at the same time (all threads are moved from blocked to runnable state).

Not mentioned

Barriers (Goetz talk about them), Exchanger (not mentioned in Goetz).

FutureTask


I recently ordered a pair of kayak-shoes on the German Amazon. I did not expect to get the shoes delivered right when I ordered them, but I got a *tracking number*, which allow me to follow how the order is progressing.

FutureTask is a bit the same - you order a computation in an other thread (or group of threads).

The result of such an order is a Future, an object which at some point later in time will hold the result. A future is somewhat similar to the tracking number.

At any point in time I can ask if my order has been delivered, or I can go to the post-box and just wait. Same in Java. You can ask a Future is is has been computed - using the boolean `isDone()` method. Or just wait for the result (or get immediately if is has been finished) - using the `V get()` method.

FutureTask - sequence diagram

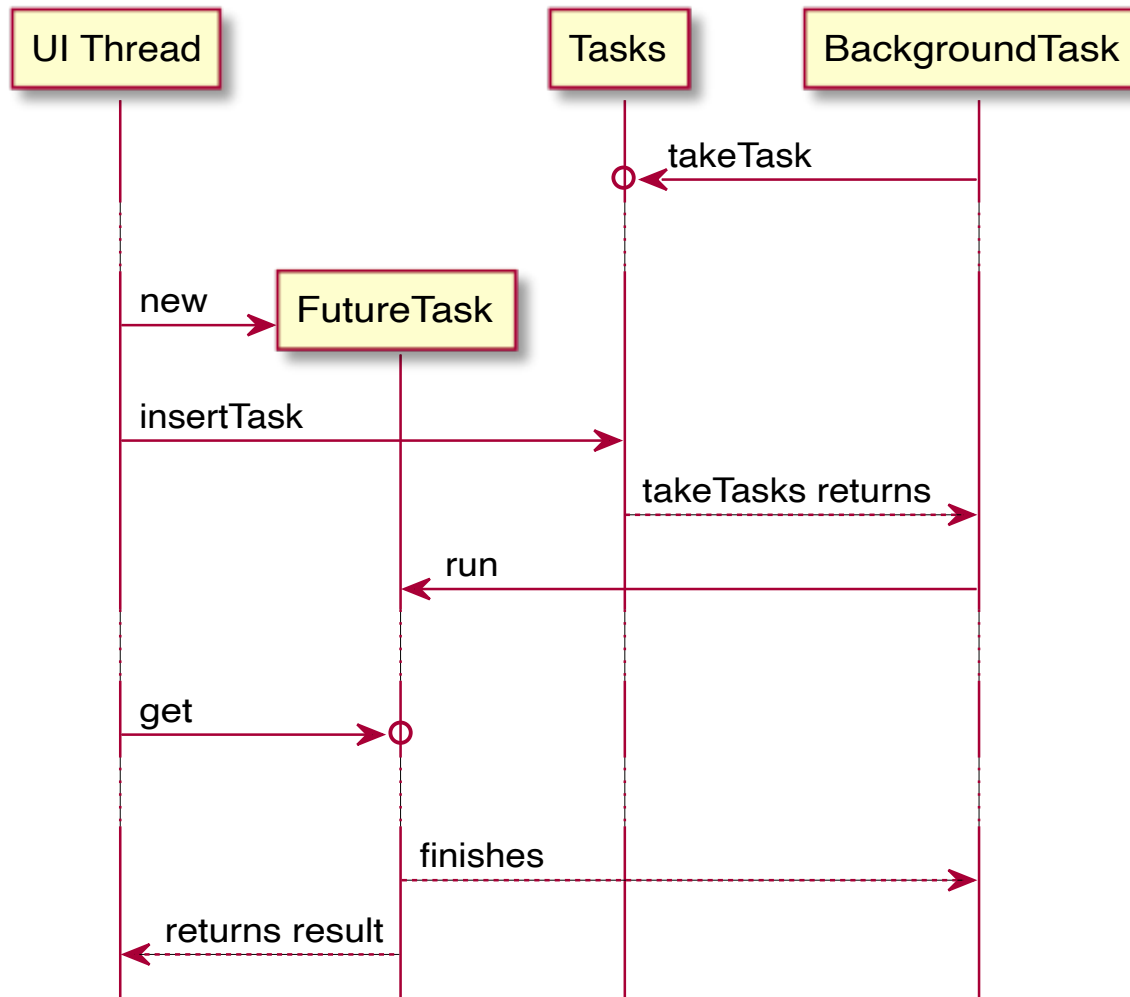

Building an efficient, scalable result cache

If you study this example, and get 90% of it, you are good for Part 1!

The example is advanced, and shows how much better one can do than *just* making all methods synchronized.

Servlet using the cache

```
public class Factorizer implements Servlet {
    private final Function<BigInteger, BigInteger[]> cache
        = new Memoizer<BigInteger, BigInteger[]>(c);

    public void service(ServletRequest req, ServletResponse resp) {
        try {
            BigInteger i = extractFromRequest(req);
            BigInteger result = cache.compute( i );
            encodeIntoResponse(resp, result);
        } catch (InterruptedException e) {
            encodeError(resp, "factorization interrupted");
        }
    }

    //...
}
```


Memoizer1

```
import java.util.function.Function;
public class Memoizer1 <Arg, Value> implements Function<A, Value> {
    private final Map<Arg, Value> cache = new HashMap<Arg, Value>();
    private final Function<Arg, Value> c;

    public Memoizer1(Function<Arg, Value> c) {
        this.c = c;
    }

    public synchronized Value compute(Arg arg) throws InterruptedException {
        Value result = cache.get(arg);
        if (result == null) {
            result = c.compute(arg);
            cache.put(arg, result);
        }
        return result;
    }
}
```

Memoizer1 behaviour

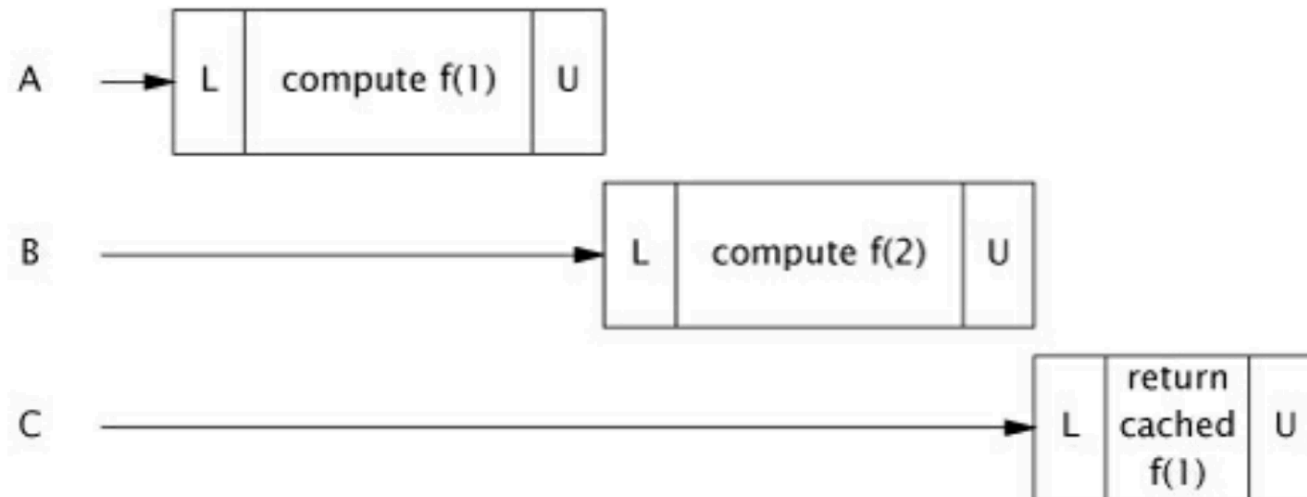

L is short for "Lock", and U for "Unlock"


Thread A and B asks for two different results, while C asks for a result which has already been cached.

Memoizer 2

```
public class Memoizer2 <Arg, Value> implements Function<Arg, Value> {  
    private final Map<Arg, Value> cache = new ConcurrentHashMap<Arg, Value>();  
    private final Computable<Arg, Value> c;  
  
    public Memoizer2(Computable<Arg, Value> c) {  
        this.c = c;  
    }  
  
    public Value compute(Arg arg) throws InterruptedException {  
        Value result = cache.get(arg);  
        if (result == null) {  
            result = c.compute(arg);  
            cache.put(arg, result);  
        }  
        return result;  
    }  
}
```


That looks good, not blocking others while I am computing the value...

However, Memoizer2 behaviour (misbehaviour)

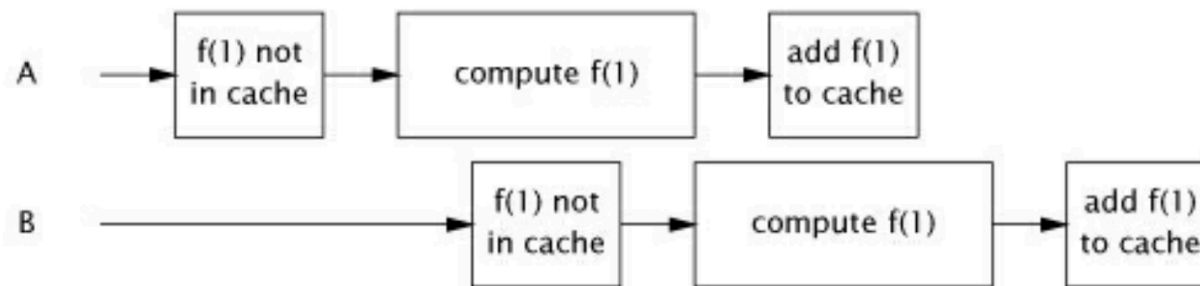

If there is a special interest in getting the factorization of 777472879329817891209831028 (or 1 in the figure)

However, Memoizer2 behaviour (misbehaviour)

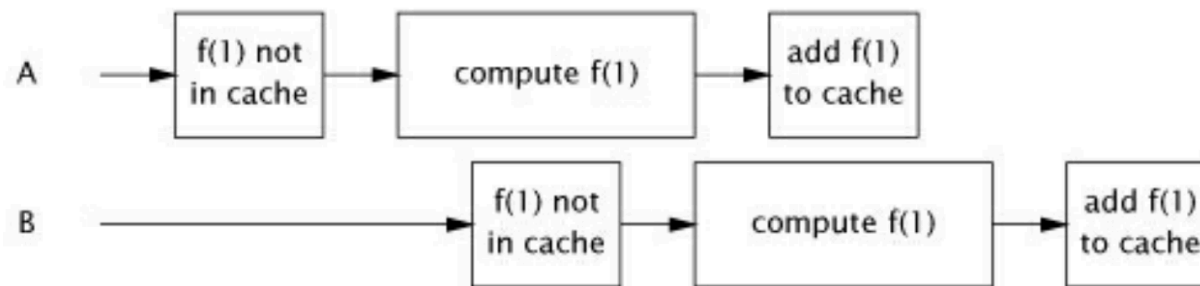

If there is a special interest in getting the factorization of 777472879329817891209831028 (or 1 in the figure)

We (might) end up computing the same value more than once.

Final version, using FutureTask

```
public class Memoizer <Arg, Value> implements Function<Arg, Value> {
    private final ConcurrentMap<Arg, Future<Value> > cache
        = new ConcurrentHashMap<Arg, Future<Value> >();
    private final Function<Arg, Value> func;

    public Memoizer(Function<Arg, Value> func) {
        this.func = func;
    }

    public Value apply(final Arg arg) throws InterruptedException {
        while (true) {
            Future<Value> f = cache.get(arg);
            if (f == null) {
                FutureTask<Value> ft
                    = new FutureTask<Value>( () -> { func.compute(arg);} );
                f = cache.putIfAbsent(arg, ft);
                if (f == null) {
                    f = ft;
                    ft.run();
                }
            }
            try { return f.get(); }
            catch (Exception e) { /*... Miserable death */ }
        }
    }
}
```

Goetz - summary chapter 1-5

- It's the mutable state that is the issue

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.
- Hold locks for the duration of compound actions (Kasper - and no longer)

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.
- Hold locks for the duration of compound actions (Kasper - and no longer)
- A program that accesses a mutable variable from multiple threads without synchronization is a broken program.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.
- Hold locks for the duration of compound actions (Kasper - and no longer)
- A program that accesses a mutable variable from multiple threads without synchronization is a broken program.
- Don't rely on clever reasoning about why you don't need to synchronize.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.
- Hold locks for the duration of compound actions (Kasper - and no longer)
- A program that accesses a mutable variable from multiple threads without synchronization is a broken program.
- Don't rely on clever reasoning about why you don't need to synchronize.
- Include thread safety in the design process—or explicitly document that your class is not thread-safe.

Goetz - summary chapter 1-5

- It's the mutable state that is the issue
- Make fields final unless they need to be mutable.
- Immutable objects are automatically thread-safe.
- Immutable objects simplify concurrent programming tremendously.
- Encapsulation makes it practical to manage the complexity.
- Guard all variables in an invariant with the same lock.
- Hold locks for the duration of compound actions (Kasper - and no longer)
- A program that accesses a mutable variable from multiple threads without synchronization is a broken program.
- Don't rely on clever reasoning about why you don't need to synchronize.
- Include thread safety in the design process—or explicitly document that your class is not thread-safe.
- Document your synchronization policy.

Java Concurrency in Practice (p. 194). Pearson Education. Kindle Edition.

