```
import seaborn as sns
import pandas as pd
import matplotlib.pyplot as plt

# Load the built-in NYC Taxi dataset
df_taxi = sns.load_dataset('taxis')

print("Dataset Loaded Successfully!")
df_taxi.head()
```

Dataset Loaded Successfully!

	pickup	dropoff	passengers	distance	fare	tip	tolls	total	color	pa
0	2019-03-23 20:21:09	2019-03-23 20:27:24	1	1.60	7.0	2.15	0.0	12.95	yellow	
1	2019-03-04 16:11:55	2019-03-04 16:19:00	1	0.79	5.0	0.00	0.0	9.30	yellow	
2	2019-03-27 17:53:01	2019-03-27 18:00:25	1	1.37	7.5	2.36	0.0	14.16	yellow	
3	2019-03-10 01:23:59	2019-03-10 01:49:51	1	7.70	27.0	6.15	0.0	36.95	yellow	
4	2019-03-30 13:27:42	2019-03-30 13:37:14	3	2.16	9.0	1.10	0.0	13.40	yellow	

Next steps: Generate code with `df_taxi` New interactive sheet

```
# 1. Convert pickup and dropoff to datetime objects
df_taxi['pickup'] = pd.to_datetime(df_taxi['pickup'])
df_taxi['dropoff'] = pd.to_datetime(df_taxi['dropoff'])

# 2. Drop rows with missing values (like missing 'borough' data)
df_taxi = df_taxi.dropna()

# 3. Add a 'hour' column to see when the most money is made
df_taxi['hour'] = df_taxi['pickup'].dt.hour

print("Data Cleaned! Ready for Analysis.")
```

Data Cleaned! Ready for Analysis.

```
plt.figure(figsize=(10, 6))
# We added hue='pickup_borough' and legend=False to make the warning go away
sns.barplot(x='pickup_borough', y='tip', data=df_taxi, hue='pickup_borough',
```

```
plt.title('Average Tip Amount by NYC Borough')
plt.show()
```

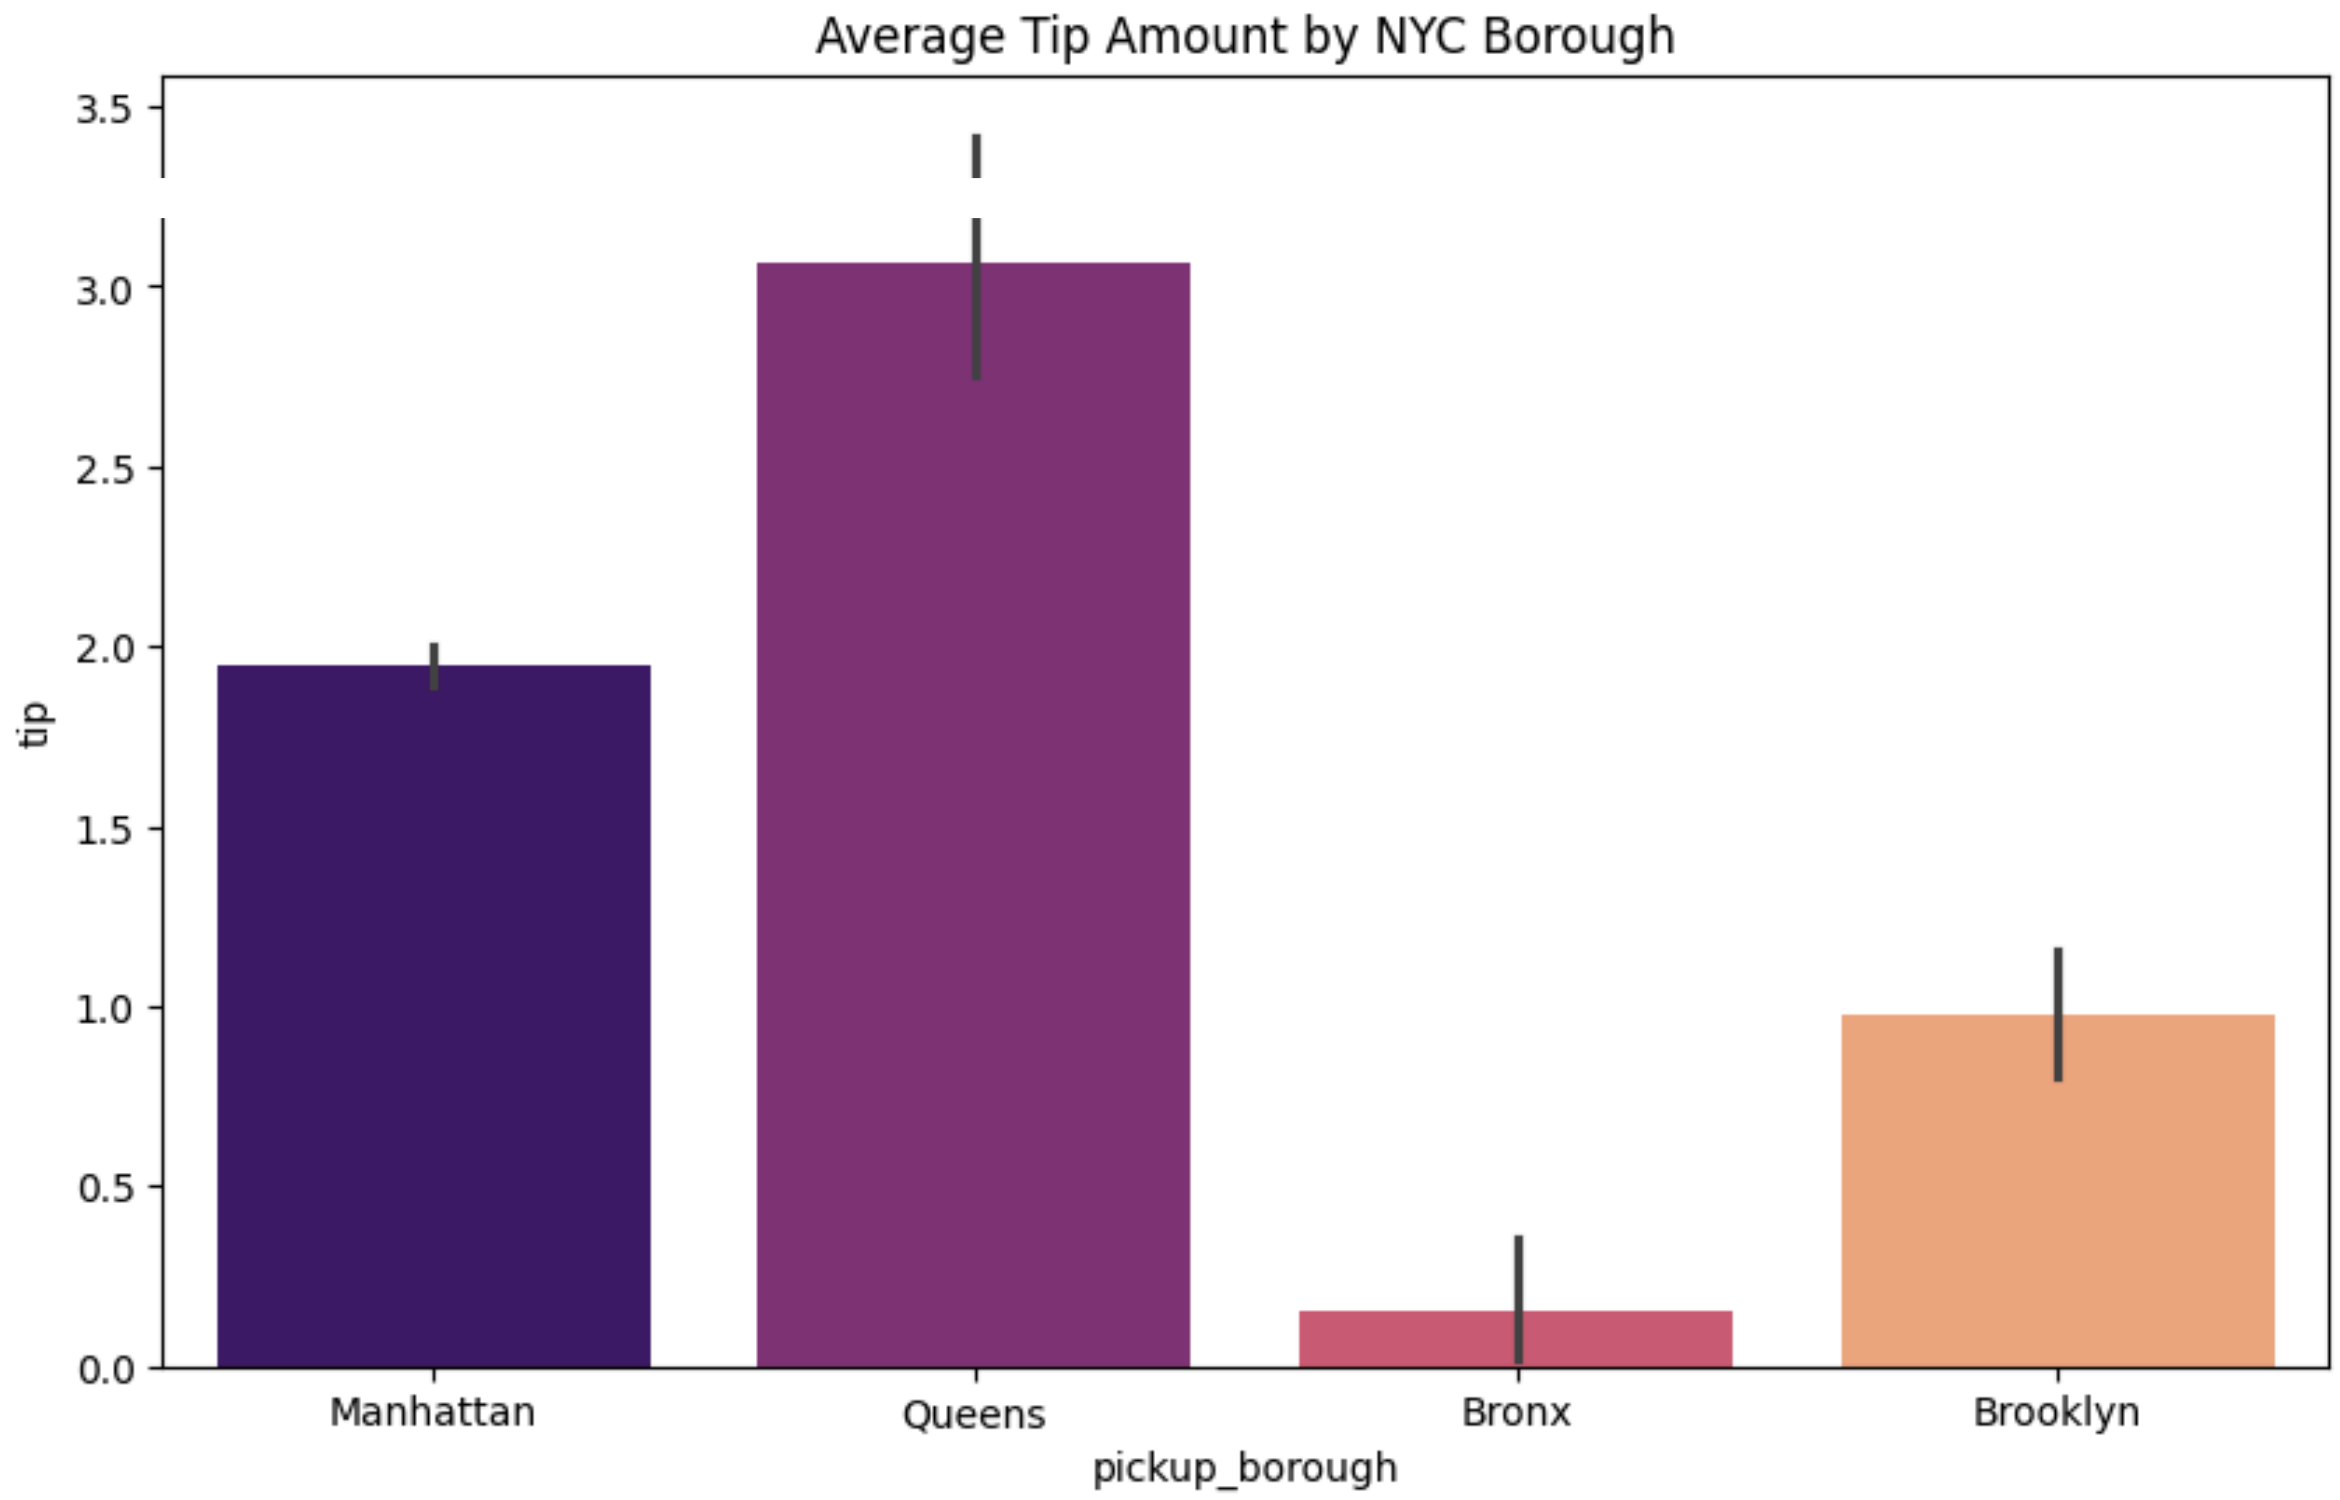


```
plt.figure(figsize=(12, 6))
# Lineplots don't usually trigger that warning, so this stays simple
sns.lineplot(x='hour', y='total', data=df_taxi, estimator='sum', color='gree
plt.title('Total Revenue Trend by Hour (NYC Taxis)')
plt.ylabel('Total Fare ($)')
plt.grid(True)
plt.show()
```

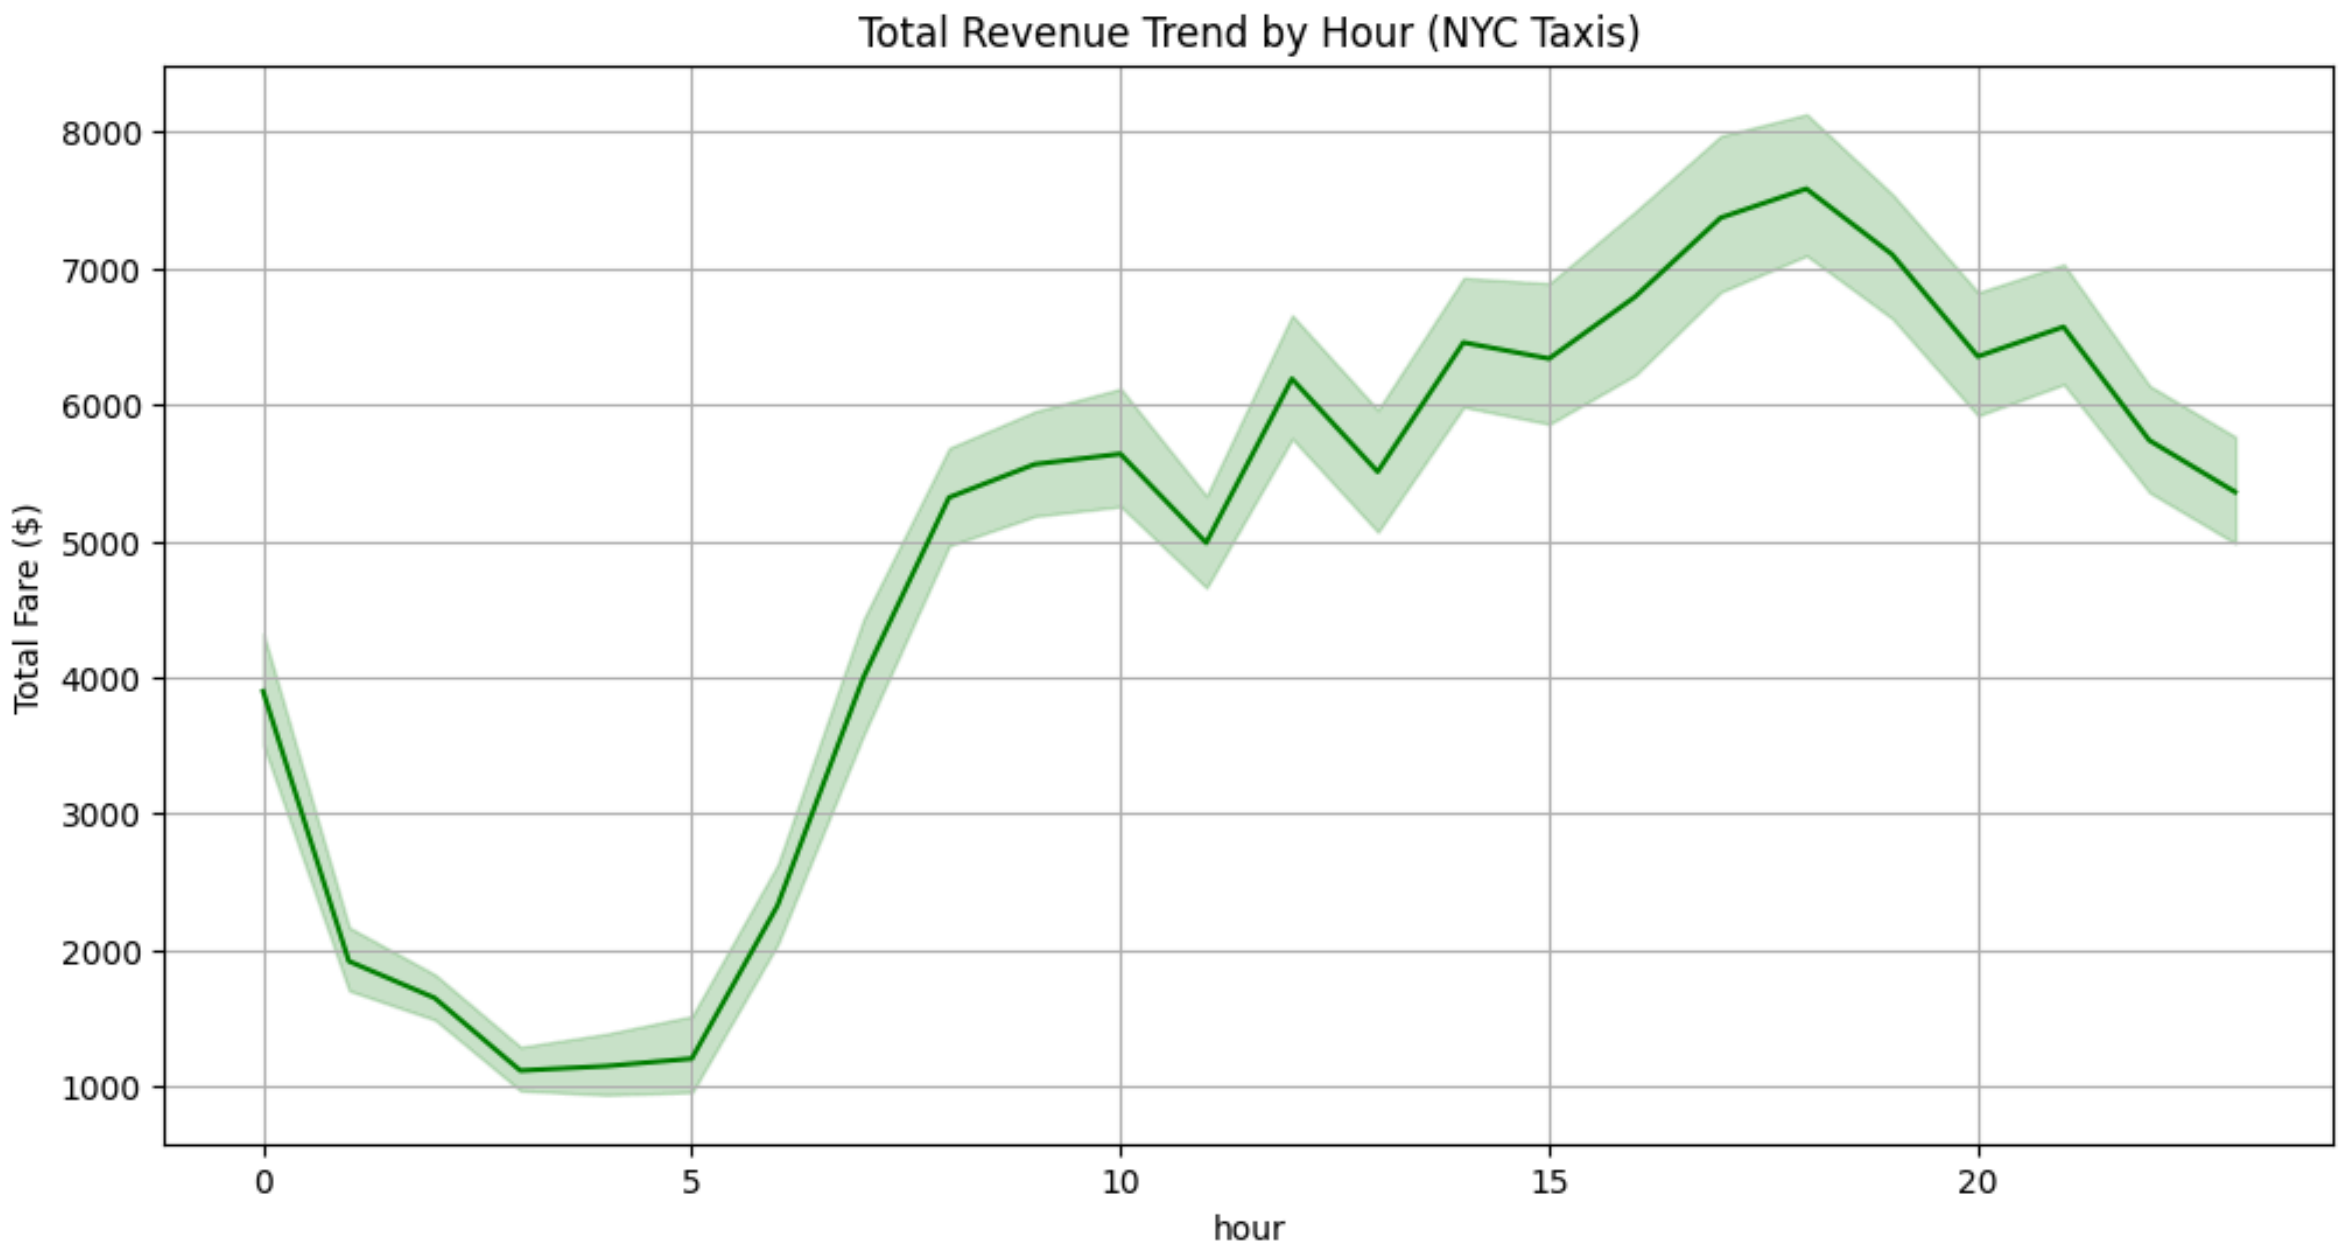


```
Start coding or generate with AI.
```