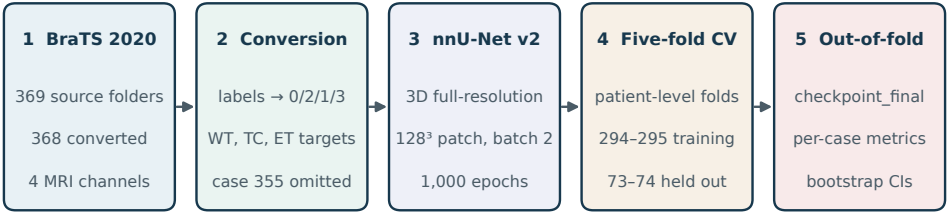

Each converted case has exactly one out-of-fold prediction (Gaussian-weighted sliding window, 50% overlap, mirroring, no postprocessing).

BraTS registration, resampling and skull-stripping precede step 1 and were not executed locally.